

nelux

Producing your dreams

Comercial & Architectural LED lighting
Since 2010

Nelux Architectural Lighting Products

Scan Our QR



Producing Your Dreams

Nelux (HK) Internation,ltd

nelux architectural lighting

18 Harbour road, Central Plaza, 32/F, Office 3208,
Wanchai, HK, China
sales@nelux.com.hk
+852 53490724

neluxury
neluxlighting
www.nelux.com.hk

NELUX (HK) INTERNATIONAL,LTD



NELUX ARCHITECTURAL LIGHTING architectural lighting products

Nelux: Illuminating Excellence for Over Three Decades

With over 32 years of combined experience, Nelux has been at the forefront of the lighting industry, specializing in fixtures for diverse lighting projects. Our journey began with the same enthusiasm and dedication that drives us today. We aim to leverage our extensive expertise to contribute meaningfully to the knowledge and development of lighting solutions, catering specifically to lighting designers, architects, interior designers, and decorators.

Since the establishment of our head office in Hong Kong in 2010, Nelux has developed three primary product lines:

1. **Architectural Lighting Products:** Products to enhance the aesthetic and functional aspects of architectural spaces.
2. **Industrial Lighting:** High quality and Engineered to meet the rigorous demands of industrial environments.
3. **Bespoke Lighting Products:** Custom-designed lighting solutions that include mold management, product design, and the manufacturing of special and unique products in direct collaboration with our suppliers and customers.

Our Expertise

At Nelux, we excel in professional mold product management and oversee the entire production process, specializing in die casting parts, CNC precision machining parts, and custom fabrication parts. Our commitment to quality is unwavering; we conduct thorough inspections and quality control throughout the entire production process.

Our Strength

Our professional team, combined with the most advanced knowledge in lighting, empowers us to provide high-quality products with exceptional precision. We pride ourselves on our ability to deliver the best solutions tailored to your needs.


Custom Solutions

We offer competitive quotes based on your drawings (preferred formats: STEP, DWG, and PDF) within 49 hours. Our goal is to provide you with unparalleled service and products that meet your exact specifications.



New Update, More Versatile Application

- Flexible change in beam angle, color temperature, luminance according with different application scene;
- 4 lines 3 phases and 3 lines 1 phase track adaptor for optional
- TOYONIA COB, 5 years warranty.

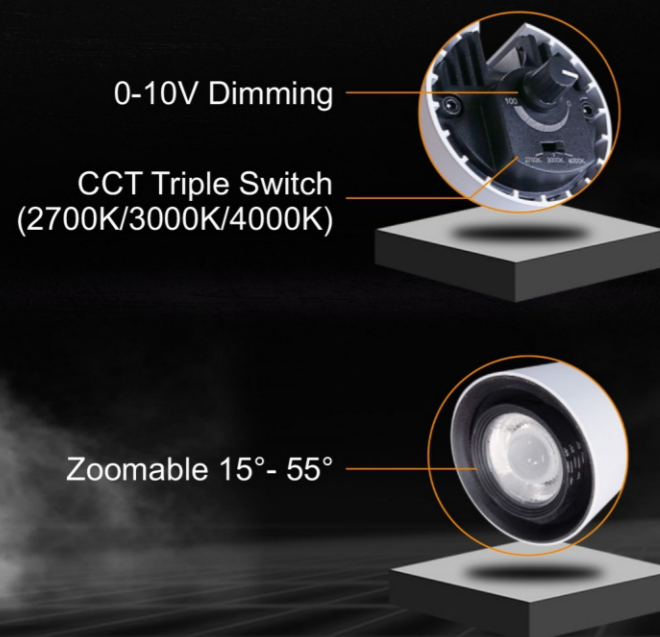

TRACK LIGHT

3 types of installation:



Track Type



Recessed Type



Surface Type

Dimming Type : Triac Dimmable / 0-10V dimmable / DALI dimmable.
Flexible installation choices meet more wider different installation site,
more harmonious and beautiful.



HOFF Track Light



NT1028 10W



NT1055 15W



NT1029 20W



NT1056 25W



NT1030 30W



NT1057 35W



NT1031 40W



NT1089 40W



NT1078 25W/30W

Easy to replace reflector to change beam angle, anti-glare function with leds sinking technology.
Light body made from original aluminum, RoHs Reach standard.





NT1028

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
10W	2700K	CITIZEN COB	≥80	20°	848.1lm
	3000K			30°	872.5lm
	4000K			40°	883.5lm
	5000K				

Size/CTN: 470×320×260 mm
G.W./CTN: 9.3 kgs
PCS/CTN: 15 pcs

Light distribution parameters


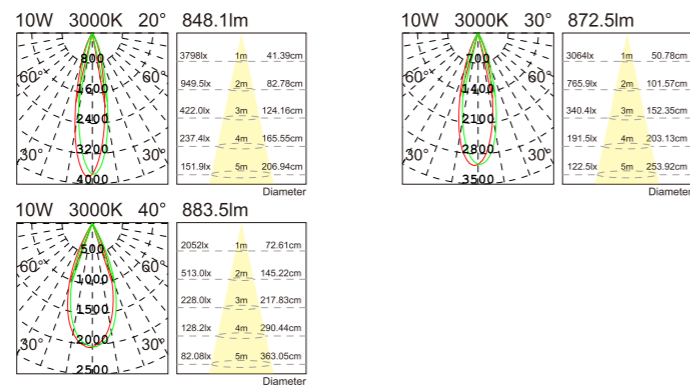


NT1055

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
15W	2700K	CITIZEN COB	≥80	15°	1350.6lm
	3000K			24°	1324.8lm
	4000K			40°	1195.4lm
	5000K				

Size/CTN: 575×435×295 mm
G.W./CTN: 9.1 kgs
PCS/CTN: 12 pcs

Light distribution parameters

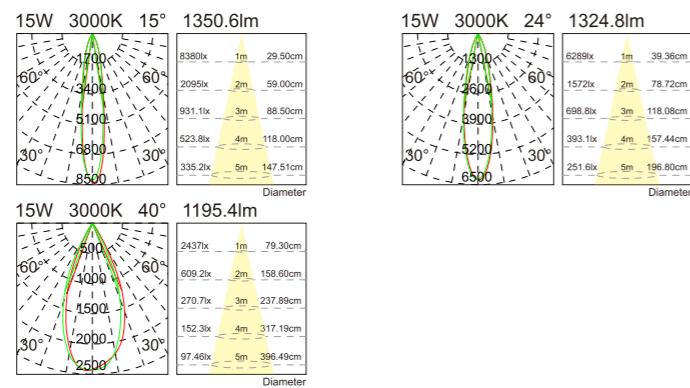


NT1029

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
20W	2700K	CITIZEN COB	≥80	15°	1795.1lm
	3000K			24°	1763.6lm
	4000K			38°	1771.7lm
	5000K				

Size/CTN: 470×320×295 mm
G.W./CTN: 12.3 kgs
PCS/CTN: 15 pcs

Light distribution parameters


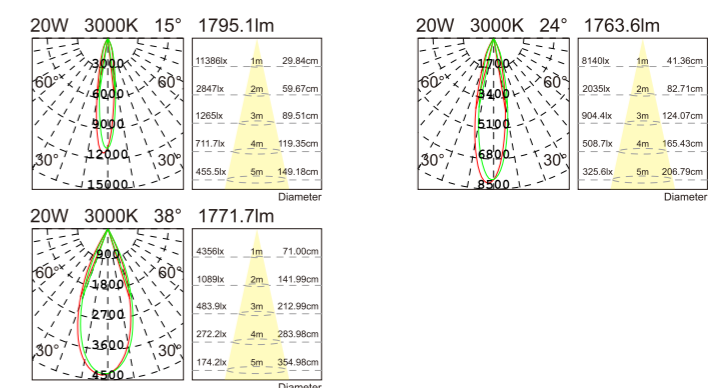


NT1056

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
25W	2700K	CITIZEN COB	≥80	15°	2140.3lm
	3000K			24°	2027.0lm
	4000K			38°	2024.0lm
	5000K				

Size/CTN: 575×435×295 mm
G.W./CTN: 11.6 kgs
PCS/CTN: 12 pcs

Light distribution parameters

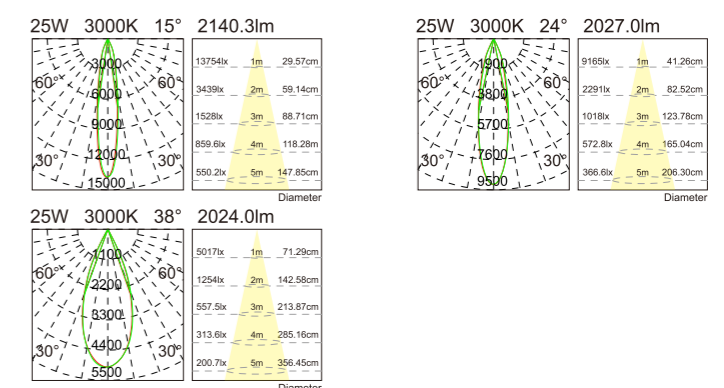





NT1030

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
30W	2700K	CITIZEN COB	≥80	15°	2727.9lm
	3000K			24°	2772.4lm
	4000K			38°	2725.3lm
	5000K				

Size/CTN: 500×380×310 mm
G.W./CTN: 13.9 kgs
PCS/CTN: 12 pcs

Light distribution parameters


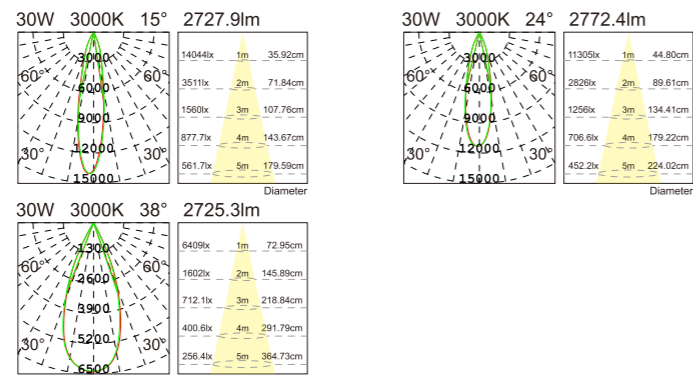


NT1057

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
35W	2700K	CITIZEN COB	≥80	15°	3194.5lm
	3000K			24°	3217.7lm
	4000K			38°	2937.0lm
	5000K				

Size/CTN: 570×470×330 mm
G.W./CTN: 14.3 kgs
PCS/CTN: 12 pcs

Light distribution parameters


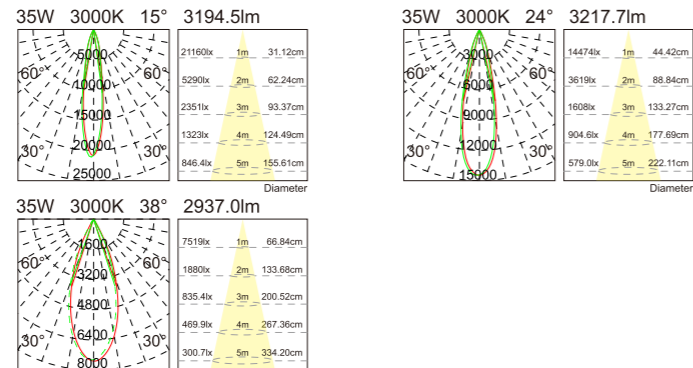


NT1031

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
40W	2700K	CITIZEN COB	≥80	15°	3723.3lm
	3000K			24°	3834.2lm
	4000K			38°	3618.3lm
	5000K				

Size/CTN: 500×380×340 mm
G.W./CTN: 18.7 kgs
PCS/CTN: 12 pcs

Light distribution parameters


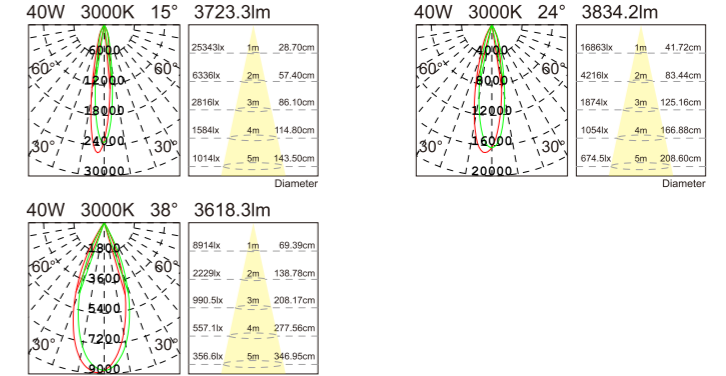


NT1089


Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
40W	2700K	Bridgelux COB	≥90	24°	4678.4lm
	3000K			36°	3895.7lm
	4000K				
	5000K				

Size/CTN: 455×300×350 mm
G.W./CTN: 7.2 kgs
PCS/CTN: 6 pcs


Light distribution parameters

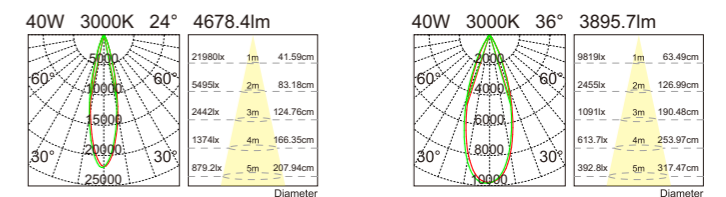

With Eaglerise flicker-free driver, 5 years warranty

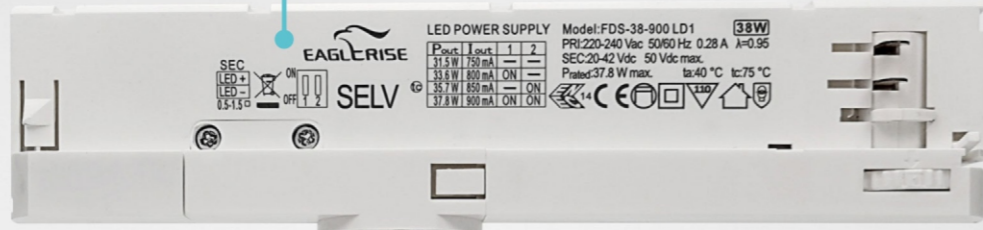


Super short rotatable arm


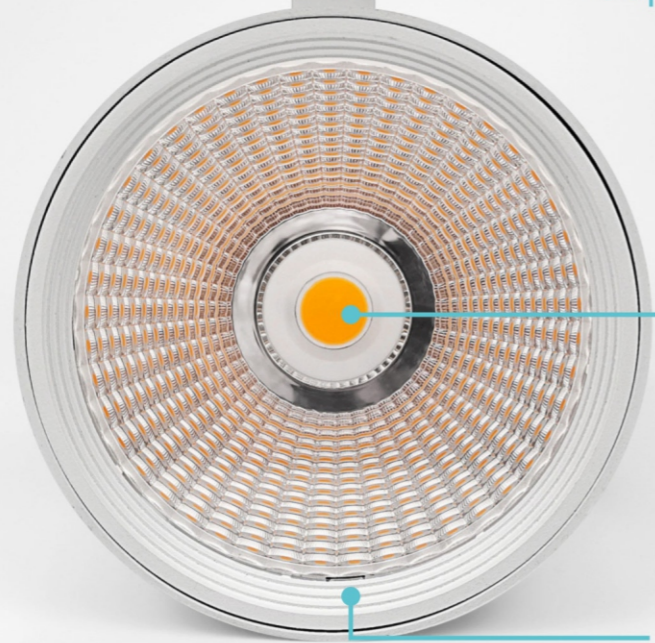


Bridgelux COB

Honeycomb as option



Laser degrees, adjustable angle more accurate


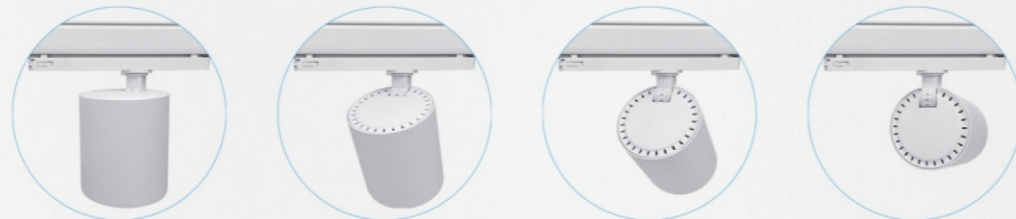


NT1078

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
25W	2700K	Bridgelux COB	≥80	15°	2634.7lm
35W	3000K			24°	2601.0lm
				36°	2524.6lm
35W	4000K	54°	2504.8lm		
		15°	3070.5lm		
		24°	3076.0lm		
		36°	3027.2lm		
				54°	3116.1lm

Size/CTN: 350×290×480 mm
G.W./CTN: 6.56 kgs
PCS/CTN: 8 pcs

Light distribution parameters

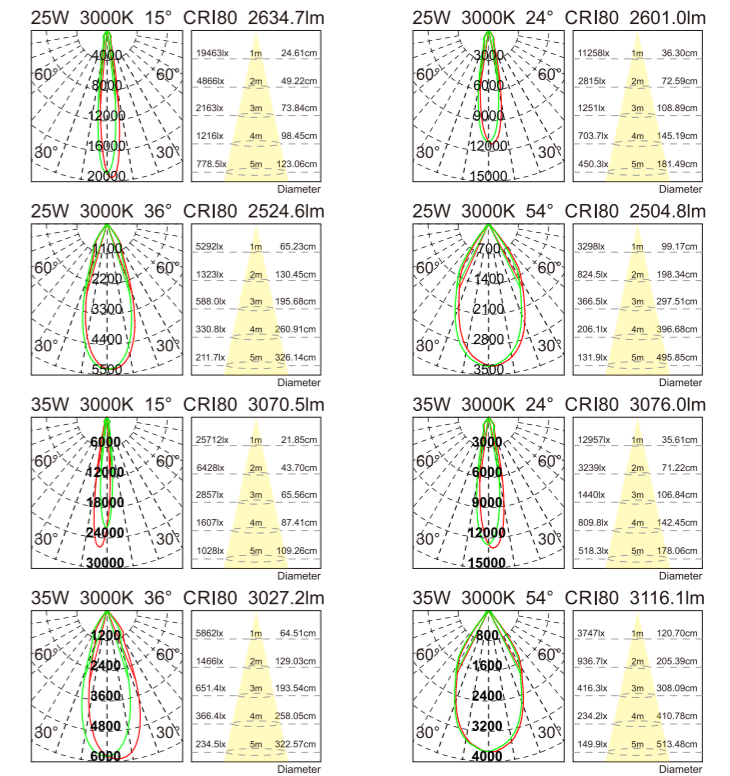

Honeycomb Optional



HOFF II Track Light



NT1051 8W



NT1052 8W



NT1100 8W



NT1034 10W



NT1053 15W



NT1035 20W



NT1054 25W

Compact design to better match space application, super thin light body with bigger lens, perfect structure show. Easy to replace lens to change beam angle. Light body made from original aluminum, RoHs Reach standard.






Exclusive design,
Compact and beautiful



NT1051					
Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
8W	2700K	AC COB	≥80	18°	631.8lm
	3000K			24°	643.0lm
	4000K			36°	644.5lm

Size/CTN: 515×380×235 mm
G.W./CTN: 9.2 kgs
PCS/CTN: 24 pcs

Light distribution parameters

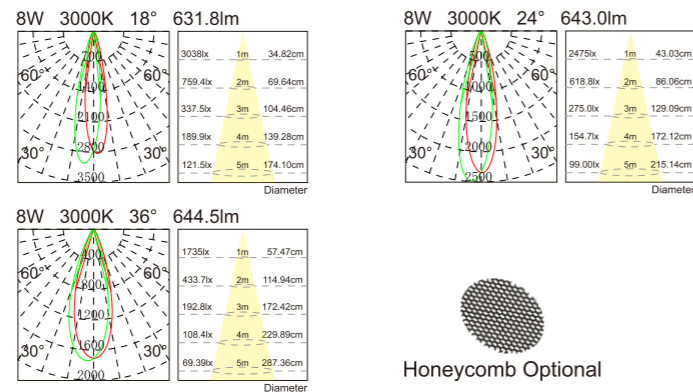



Honeycomb Optional



NT1052					
Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
8W	2700K	AC COB	≥80	18°	650.1lm
	3000K			24°	662.0lm
	4000K			36°	665.1lm

Size/CTN: 515×380×235 mm
G.W./CTN: 9.6 kgs
PCS/CTN: 24 pcs

Light distribution parameters

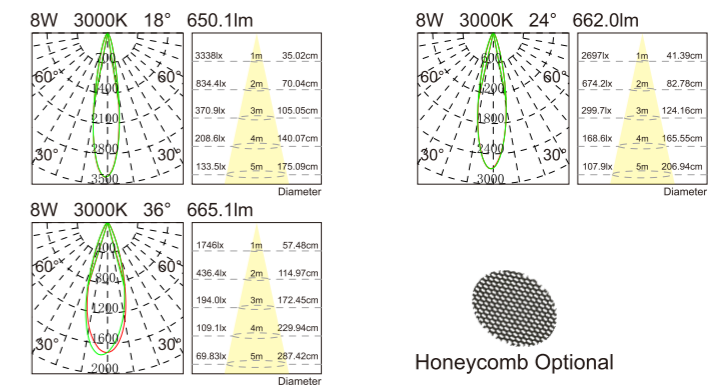


Honeycomb Optional




NT1100					
Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
8W	2700K	AC COB	≥90	24°	590.6lm
	3000K			32°	670.1lm
	4000K			40°	677.8lm
				55°	683.0lm

Size/CTN: 420×400×335 mm
G.W./CTN: 15.6 kgs
PCS/CTN: 40 pcs

Light distribution parameters

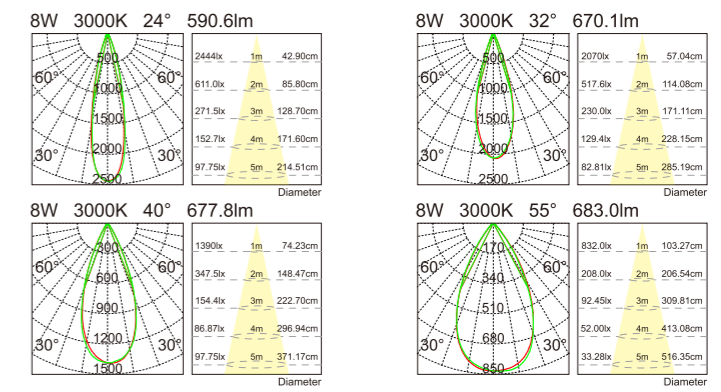

Honeycomb Optional









NT1034

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
10W	2700K	CREE COB	≥90	15°	826.4lm
	3000K			24°	825.2lm
	4000K			36°	803.1lm
	5000K				

Size/CTN: 615×320×255 mm
G.W./CTN: 9.8 kgs
PCS/CTN: 20 pcs

Light distribution parameters







NT1035

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
20W	2700K	CREE COB	≥90	15°	1617.5lm
	3000K			24°	1566.8lm
	4000K			36°	1529.9lm
	5000K				

Size/CTN: 525×480×285 mm
G.W./CTN: 14.3 kgs
PCS/CTN: 18 pcs

Light distribution parameters







NT1053

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
15W	2700K	CREE COB	≥80	18°	1401.7lm
	3000K			24°	1435.2lm
	4000K			36°	1391.5lm
	5000K				

Size/CTN: 575×330×310 mm
G.W./CTN: 6.2 kgs
PCS/CTN: 12 pcs

Light distribution parameters







NT1054

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
25W	2700K	CREE COB	≥80	15°	2477.9lm
	3000K			24°	2464.5lm
	4000K			36°	2403.6lm
	5000K				

Size/CTN: 575×480×360 mm
G.W./CTN: 14.1 kgs
PCS/CTN: 16 pcs

Light distribution parameters





HOFF II Track Light



NT1079 17W



NT1080 32W



NT1081 54W

The fourth generation ECO series, anti-glare function. Easy to replace lens to change beam angle.
Light body made from original aluminum, RoHs Reach standard.








NT1079

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
17W	2700K	Luminus COB	≥90	24°	1359.0lm
	3000K			36°	1412.4lm
	4000K			54°	1375.8lm

Size/CTN: 445×270×280 mm
G.W./CTN: 9.11 kgs
PCS/CTN: 15 pcs

Light distribution parameters







NT1080

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
32W	2700K	Luminus COB	≥90	24°	2742.5lm
	3000K			36°	2714.7lm
	4000K			54°	2899.4lm

Size/CTN: 500×380×310 mm
G.W./CTN: 13.1 kgs
PCS/CTN: 12 pcs

Light distribution parameters








NT1081


Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
54W	2700K	Luminus COB	≥90	24°	4788.5lm
	3000K			36°	4738.6lm
	4000K			54°	4912.2lm

Size/CTN: 500×380×340 mm
G.W./CTN: 17.7 kgs
PCS/CTN: 12 pcs

Light distribution parameters



Stepless Zoomable track light

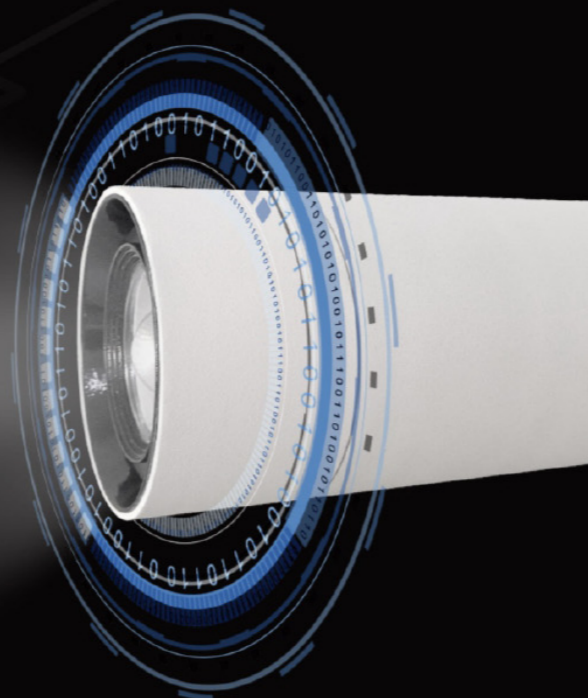

0 - 10V Dimmable
CCT Triple Switch



Adjustable Beam
Angle: 15°~50°

ZOOM HOFF Track Light



NT1061 15W



NT1062 25W



NT1033 25W

Multi-Function focusing track light, dimming, CCT changeable, beam angle adjustable. Flexible application in various scene.
Light body made from original aluminum, RoHs Reach standard.






NT1061

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
15W	2700K	TOYONIA COB	≥90	15°	627.3lm
	3000K			55°	816.1lm
	4000K				

Size/CTN: 470×320×295 mm
G.W./CTN: 12 kgs
PCS/CTN: 15 pcs

Light distribution parameters






NT1033

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
25W	2700K	CITIZEN COB	≥90	15°	1708.7lm
	3000K			50°	2045.4lm
	4000K				
	5000K				

Size/CTN: 500×380×310 mm
G.W./CTN: 14.168 kgs
PCS/CTN: 12 pcs

Light distribution parameters



NT1062

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
25W	2700K	TOYONIA COB	≥90	15°	1384.7lm
	3000K			55°	1537.9lm
	4000K				

Size/CTN: 500×380×310 mm
G.W./CTN: 14.5 kgs
PCS/CTN: 12 pcs

Light distribution parameters

