

nelux

Producing your dreams

Comercial & Architectural LED lighting
Since 2010

Nelux Architectural Lighting Products

MINIS mini cabinet light

Scan Our QR




Producing Your Dreams

Nelux (HK) Internation,ltd

nelux architectural lighting

18 Harbour road, Central Plaza, 32/F, Office 3208,
Wanchai, HK, China
sales@nelux.com.hk
+852 53490724

neluxury
neluxlighting
www.nelux.com.hk

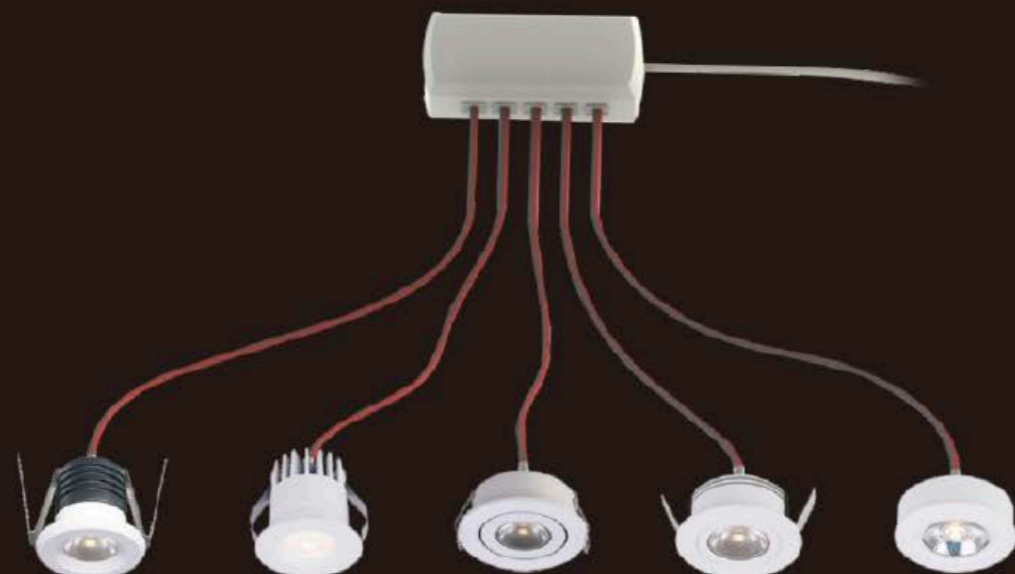

MINIS Mini Cabinet Light



NR1256 1.3W



NR1146 3W



NR1147 3W



NR1178 3W



NR1180 3W



NC1014 3W

Light body made from original aluminum, RoHs Reach standard.
 Mini size with dot light output
 Flexible combination, one driver with several light sets.





NR1256

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
1.3W	2700K	SMD	≥80	20°	83.60lm
	3000K				
	4000K				
	5000K				

Size/CTN: 505×465×270 mm
G.W./CTN: 23.6 kgs
PCS/CTN: 18 pcs

Light distribution parameters

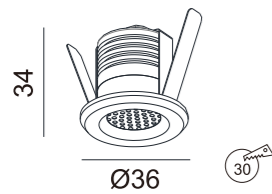
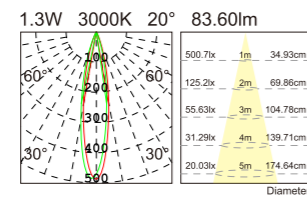


NR1147

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
3W	3000K	Samsung	≥80	10°	167.1lm
	3500K			20°	188.0lm
	4000K			40°	177.3lm

Size/CTN: 320×280×225 mm
G.W./CTN: 6.89 kgs
PCS/CTN: 60 pcs

Light distribution parameters

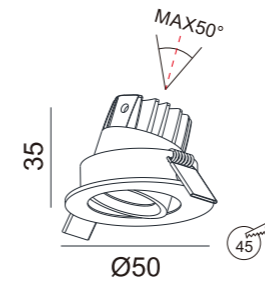
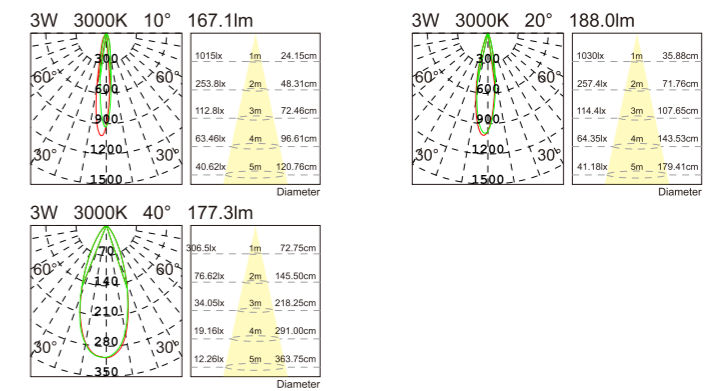


NR1146

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
3W	3000K	Samsung	≥80	10°	167.1lm
	3500K			20°	188.0lm
	4000K			40°	177.3lm

Size/CTN: 320×280×225 mm
G.W./CTN: 6.3 kgs
PCS/CTN: 60 pcs

Light distribution parameters

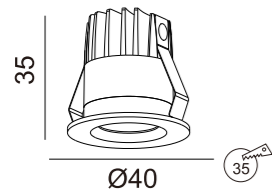
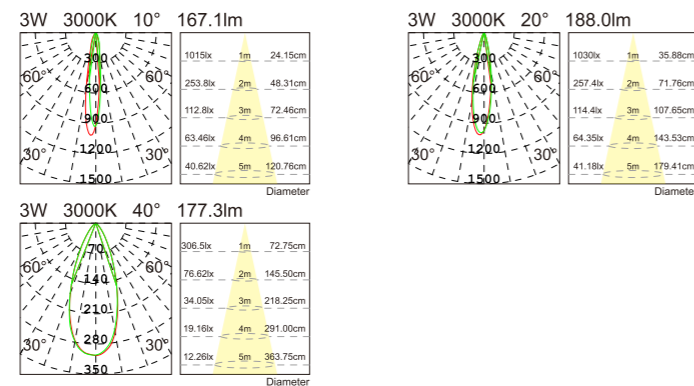


NR1178

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
3W	3000K	CREE COB	≥80	24°	199.4lm
	3500K			40°	277.0lm
	4000K				
	4000K				
	5000K				

Size/CTN: 465×190×225 mm
G.W./CTN: 4.66 kgs
PCS/CTN: 30 pcs

Light distribution parameters

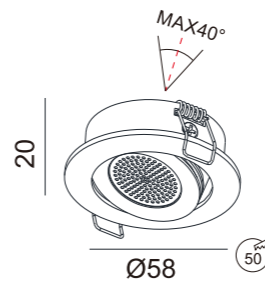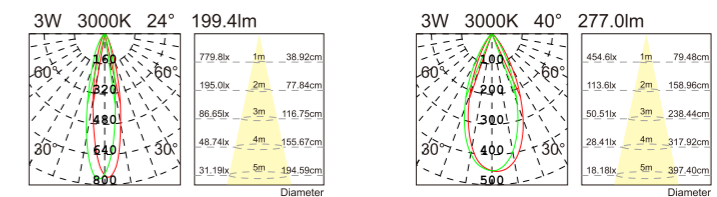






NR1180

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
3W	3000K	CREE COB	≥80	24°	199.4lm
	3500K			40°	277.0lm
	4000K				
	5000K				

Size/CTN: 465×190×225 mm
G.W./CTN: 4.18 kgs
PCS/CTN: 30 pcs

Light distribution parameters

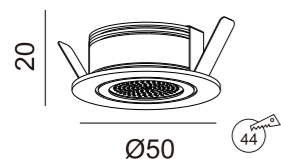
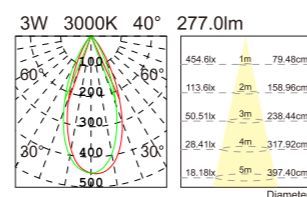
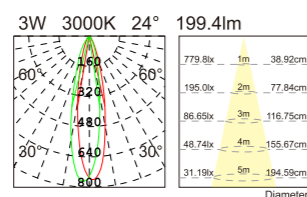


NC1014

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
3W	3000K	CREE COB	≥80	15°	235.8lm
	3500K			24°	231.0lm
	4000K				
	5000K				

Size/CTN: 465×190×225 mm
G.W./CTN: 4.876 kgs
PCS/CTN: 30 pcs

Light distribution parameters

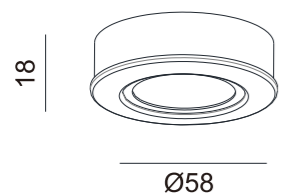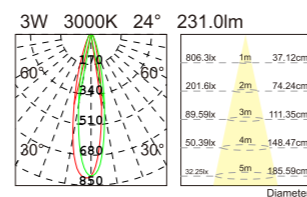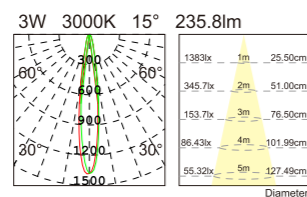



Nelux (HK) international,ltd,

18, harbour road, central plaza, 32/F, offic 3208, wanchai, hong kong, china

Tel: +852 28600042

Fax: +852 28600066

Business whatsapp: +852 5349 0724

wechat: neluxury

email:

sales@nelux.com.hk

salesnelux@gmail.com

neluxclients@gmail.com

website

www.nelux.com.hk