

nelux
PRODUCING YOUR DREAMS

2025

Nelux Architectural Lighting Products
Whatsapp: +852 5349 0724
sales@nelux.com.hk
www.nelux.com.hk


Head office: China, HK, Wanchai,
Central Plaza, 18 Harbour road, 32/F, Office 3208
Workhouse: China, HK, Tuen Mun, Sun Hing Industrial Building, 22 Kin Fat Street, 11th Floor

Tel:+852 28600042
Fax:+852 28600066
WeChat: neluxury

NELUX ARCHITECTURAL LIGHTING - LED RECESSED SPOT LIGHT 2025

nelux
Producing your dreams

LED Recessed Spot Light

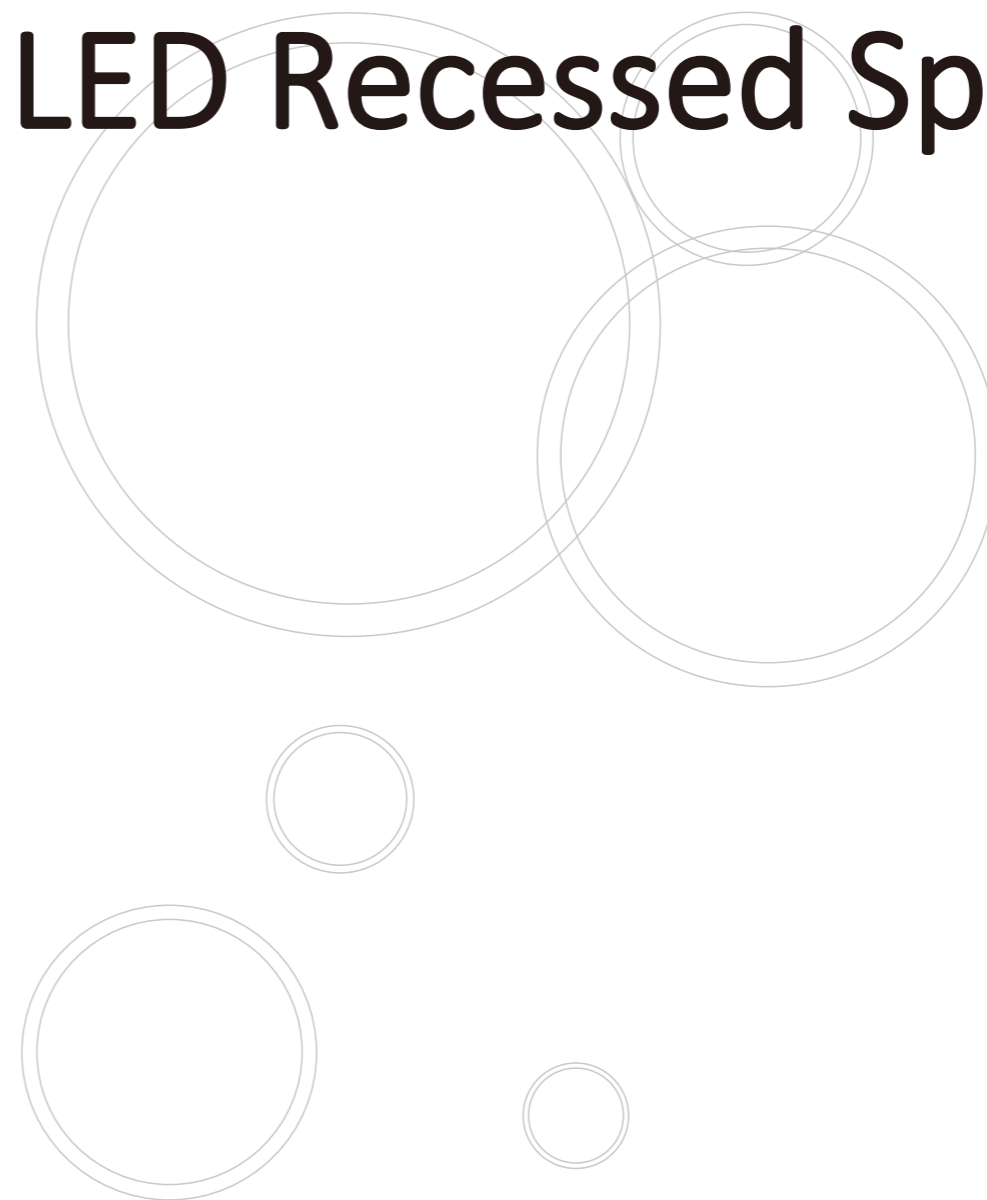

ARCHITECTURAL & COMMERCIAL LIGHTING

**NELUX CUSTOMISING NELUX
PRODUCTOS A MEDIDA**



**MODERN DESIGN
REDECORATE YOUR SPACE**

SMART
MODERN
FORM
+
LONG
LIFESPAN
+
LIGHTING
SOLUTIONS

ABOUT US

13 years ago a group of us bonded together with the bright idea to bring unique design and top quality led lighting system to market. All for architectural and commercial lighting products reflect the core of modularity, convenience and affordability.

Nelux a tech-style luminaire firm that focuses on innovation. These innovation based on our deep cooperation with lighting designers, we know what you need, we know how to bring a better lighting in your space.

Working with us comes with some awesome perks

INNOVATIVE TECHNOLOGY:


With years deep communication with designers, We continuously strive to bring the latest lighting components and technological innovations to LED lighting products

COMPREHENSIVE DATASHEET SUPPORT:


In Nelux, we always think about how to help our customers finish their work, see what we can do for you, Lighting design, IES Files, High resolution photos, You just sent us DWG file, we will work for you with a experience team

CUSTOMIZATION:

With a wide variety of marketing content from catalogue choose, if customers still need a special or unique design for lighting, our global sales team will work with you to user in a customization lighting solution for your customers.



8W



12W


| Code | Power | Lumen | Beam angle | CCT | CRI |
|-------------|-------|------------------|------------|-------|------|
| NL0616B-8W | 8W | 3000K: 718.79Lm | 15° | 3000K | ≥ 90 |
| | | 4000K: 736.89Lm | 24° | 4000K | |
| | | 5000K: 745.23Lm | 38° | 5000K | |
| NL0616B-12W | 12W | 3000K: 1023.32Lm | 15° | 3000K | ≥ 90 |
| | | 4000K: 1056.09Lm | 24° | 4000K | |
| | | 5000K: 1081.28Lm | 38° | 5000K | |

ErP CE CB RoHS IES file

Dimmable: TRIAC



Available as GU10 lighting cup

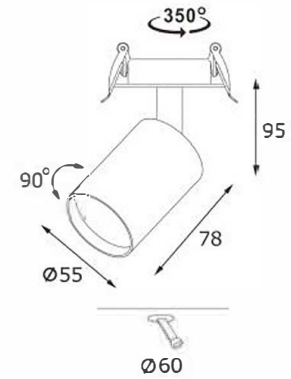

NL0616-GU10



90°adjust



350°rotate



NL80018A



NL80016A



NL80019A




NL80017A




NL0580A

SPOTLIGHT SERIES

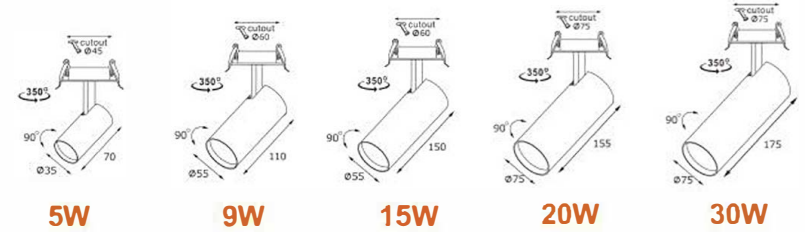

| Code | Power | Lumen | Beam angle | CCT | CRI |
|-------------|-------|----------------------------------------------------------|---------------------------------|-------------------------|------|
| NL0580A-5W | 5W | 3000K: 426.35Lm 4000K: 437.41Lm 5000K: 441.23Lm | 15° 24° 38° 45° 60° | 3000K 4000K 5000K | ≥ 90 |
| NL0580A-9W | 9W | 3000K: 770.23Lm 4000K: 781.31Lm 5000K: 790.21Lm | 15° 24° 38° 45° 60° | 3000K 4000K 5000K | ≥ 90 |
| NL0580A-15W | 15W | 3000K: 1252.71Lm 4000K: 1282.63Lm 5000K: 1295.32Lm | 15° 24° 38° 45° 60° | 3000K 4000K 5000K | ≥ 90 |
| NL0580A-20W | 20W | 3000K: 1672.37Lm 4000K: 1698.55Lm 5000K: 1709.31Lm | 15° 24° 38° 45° 60° | 3000K 4000K 5000K | ≥ 90 |
| NL0580A-30W | 30W | 3000K: 2501.71Lm 4000K: 2551.89Lm 5000K: 2570.38Lm | 15° 24° 38° 45° 60° | 3000K 4000K 5000K | ≥ 90 |

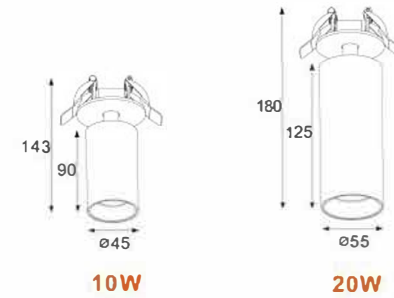


| Code | Power | Lumen | Beam angle | CCT | CRI |
|--------------|-------|-----------------|------------|-------|------|
| NL80016A-10W | 10W | 3000K:845.04Lm | 15° | 3000K | ≥ 90 |
| | | 4000K:866.09Lm | 24° | 4000K | |
| | | 5000K:876.62Lm | 38° | 5000K | |
| NL80016A-20W | 20W | 3000K:1713.27Lm | 15° | 3000K | ≥ 90 |
| | | 4000K:1753.02Lm | 24° | 4000K | |
| | | 5000K:1772.90Lm | 38° | 5000K | |

ErP CE CB  RoHS  IES file




| Code | Power | Lumen | Beam angle | CCT | CRI |
|--------------|-------|-----------------|------------|-------|------|
| NL80017A-10W | 10W | 3000K:845.04Lm | 15° | 3000K | ≥ 90 |
| | | 4000K:866.09Lm | 24° | 4000K | |
| | | 5000K:876.62Lm | 38° | 5000K | |
| NL80017A-20W | 20W | 3000K:1713.27Lm | 15° | 3000K | ≥ 90 |
| | | 4000K:1753.02Lm | 24° | 4000K | |
| | | 5000K:1772.90Lm | 38° | 5000K | |

ErP CE CB  RoHS  IES file

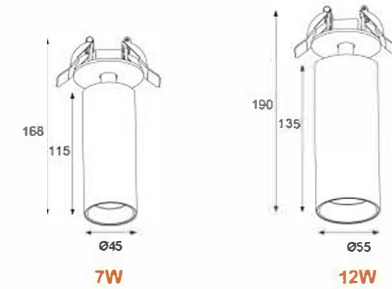


| Code | Power | Lumen | Beam angle | CCT | CRI |
|--------------|-------|-------------------------------------------------------|-------------------|-------------------------|------|
| NL80018A-7W | 7W | 3000K:511.74Lm 4000K:524.91Lm 5000K:528.53Lm | 15° 24° 38° | 3000K 4000K 5000K | ≥ 90 |
| NL80018A-12W | 12W | 3000K:1093.49Lm 4000K:1120.67Lm 5000K:1128.64Lm | 15° 24° 38° | 3000K 4000K 5000K | ≥ 90 |

ErP CE CB RoHS IES file

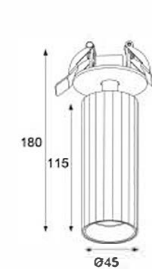

7W

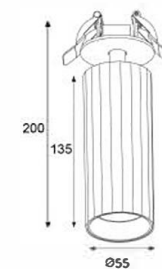

12W

| Code | Power | Lumen | Beam angle | CCT | CRI |
|--------------|-------|-------------------------------------------------------|-------------------|-------------------------|-----|
| NL80019A-7W | 7W | 3000K:511.74Lm 4000K:524.91Lm 5000K:528.53Lm | 15° 24° 38° | 3000K 4000K 5000K | ≥90 |
| NL80019A-12W | 12W | 3000K:1093.49Lm 4000K:1120.67Lm 5000K:1128.64Lm | 15° 24° 38° | 3000K 4000K 5000K | ≥90 |

ErP CE CB  RoHS  IES file

THANK YOU

NELUX (HK) INTERNATIONAL,TLD

sales@nelux.com.hk

Head Office +852 28600042

Workhouse whatsapp +852 5349 0724