

NELUX ARCHITECTURAL LIGHTING PRODUCTS

SURFACE CEILING LIGHT 2025

SURFACE CEILING LIGHT - SMART CEILING LIGHT

NELUX (HK) INTERNATIONAL,LTD

Head office: 18, harbour road, central plaza, 32/F, office 3208, wanchai, hong kong, china

website: www.nelux.com.hk

email: sales@nelux.com.hk

wechat: neluxury

tel: +852 28600042

fax: *852 28600066

About Us

Nelux: Professional Lighting Solutions

At Nelux, we have been lighting up ideas and projects around the world for over 30 years. Since establishing our headquarters in Hong Kong in 2010, we have become a trusted partner in the design and supply of technical and decorative lighting solutions for hotels, restaurants, franchises, retail stores, museums, and other commercial spaces.

Our philosophy blends innovation, design, and functionality to deliver high-performance products that not only meet but exceed the expectations of our clients. We focus on two key areas:

A premium range of interior lighting with a 5-year warranty, perfect for projects requiring durability and aesthetic excellence.

A bespoke production service that allows for the creation of unique pieces tailored to the specific needs of each client and project.

Our global market expertise, combined with an unwavering commitment to quality and competitive pricing, positions us as a leader in lighting solutions for large-scale projects. This catalog is a testament to our dedication and passion for illuminating every space with creativity and precision.



02 LED CEILING LIGHT



CLA30R

Size: 18W- Φ 230*25mm、24W- Φ 300*25mm、
36W- Φ 400*25mm、48W- Φ 500*25mm、
60W- Φ 600*25mm

Input Voltage: AC220-240V

Colour temperature: 2700-6500K

Power: 18W, 24W, 36W, 48W, 60W

Lumens: 18W-1530lm、24W-2040lm、
36W-3060lm、48W-4080lm、
60W-5100lm

Function: Standard, Microwave Sensor,
Dimmable+ CCT adjustable,
Dimmable+ CCT + RGB, Radar

PF \geq 0.5



BS14

Size: 20W-290*290*63mm,
32W-380*380*63mm

Input Voltage: AC220-240V

Colour temperature: 2700-6500K

Power: 20W, 32W

Lumens: 20W-1400lm,
32W-2240lm

Function: Standard,
Dimmable+ CCT adjustable,
Dimmable+ CCT + RGB

PF \geq 0.5



BS29

Size: 283*283*65mm

Input Voltage: AC220-240V

Colour temperature: 2700-6500K

Power: 18W

Lumens: 844lm


Function: Standard,
Dimmable+ CCT adjustable,
Dimmable+ CCT + RGB

PF \geq 0.5



PL02S

Size: 16W-300*300mm, 24W-300*600mm,
36W-600*600mm, 42W-600*600mm,
48W-300*1200mm, 72W-600*1200mm
Input Voltage: AC85-245V
Power: 16W, 24W, 36W, 42W, 48W, 72W
Lumens: 16W-1600lm, 24W-2400lm,
36W-2640lm, 42W-2640lm,
48W-4800lm, 72W-7920lm
Colour temperature: 3000-4000-6000K
Function: Standard
PF \geq 0.5



BR14

Size: 20W- Φ 290*63mm,
32W- Φ 380*63mm
Input Voltage: AC220-240V
Colour temperature: 2700-6500K
Power: 20W, 32W
Lumens: 20W-1400lm, 32W-2240lm
Function: Standard,
Dimmable+ CCT adjustable,
Dimmable+ CCT + RGB
PF \geq 0.5



BR25

Size: 40W-580*80mm,
60W-780*80mm
Input Voltage: AC220-240V
Colour temperature: 2700-6500K
Power: 40W, 60W
Lumens: 40W-3200lm, 60W-4800lm
Function: Standard,
Dimmable+ CCT adjustable,
Dimmable+ CCT + RGB
PF \geq 0.9



BR52

Size: 12W- Φ 260*50mm, 18W- Φ 330*50mm,
24W- Φ 390*60mm, 36W- Φ 490*60mm,
Input Voltage: AC220-240V
Colour temperature: 2700-6500K
Power: 12W, 18W, 24W, 36W
Lumens: 12W-720lm, 18W-1080lm
24W-1440lm, 36W-2160lm
Function: Standard,
Dimmable+ CCT adjustable,
Dimmable+ CCT + RGB
PF: 12W/18W/24W \geq 0.5, 36W \geq 0.9



BR89

Size: Φ 385*75mm
Input Voltage: AC220-240V
Colour temperature: 2700-6500K
Power: 24W
Lumens: 1200lm
Function: Standard,
Dimmable+ CCT adjustable,
Dimmable+ CCT + RGB
PF \geq 0.5



BR96

Size: 24W-320*310*40mm,
36W-420*410*40mm
Input Voltage: AC220-240V
Colour temperature: 2700-6500K
Power: 24W, 36W
Lumens: 24W-1200lm, 36W-1800lm
Color: Black, White
Function: Standard,
Dimmable+ CCT adjustable,
Dimmable+ CCT + RGB
PF: 24W \geq 0.5, 36W \geq 0.9



BR98

Size: 18W- Φ 380*50mm,
36W- Φ 380*50mm
Input Voltage: AC220-240V
Colour temperature: 2700-6500K
Power: 18W, 36W
Lumens: 18W-2160lm, 36W-3240lm
Function: Standard,
Dimmable+ CCT adjustable,
Dimmable+ CCT + RGB
PF \geq 0.5



BR122

Size: 24W- Φ 330*50mm
Input Voltage: AC220-240V
Colour temperature: 4000K
Power: 24W
Lumens: 1920lm
Function: Standard,
Dimmable+ CCT adjustable
PF \geq 0.5



BR99

Size: 24W- Φ 380*55mm,
36W- Φ 380*55mm
Input Voltage: AC220-240V
Colour temperature: 2700-6500K
Power: 24W, 36W
Lumens: 24W-1440lm, 36W-2160lm
Color: Black, White, Gray
Function: Standard,
Dimmable+ CCT adjustable,
Dimmable+ CCT + RGB
PF \geq 0.5



BR131

Size: 18W- Φ 310*55mm,
24W- Φ 310*55mm
Input Voltage: AC220-240V
Colour temperature: 2700-6500K
Power: 18W, 24W
Lumens: 18W-1260lm, 24W-1680lm
Function: Standard,
Dimmable+ CCT adjustable,
Dimmable+ CCT + RGB
PF \geq 0.5



BR121

Size: 24W- Φ 300*59mm,
36W- Φ 400*59mm
Input Voltage: AC220-240V
Colour temperature: 2700-6500K
Power: 24W, 36W
Lumens: 24W-580lm, 36W-760lm
Function: Standard,
2.4GRF Dimmable+ CCT adjustable
PF \geq 0.5



BR152

Size: Φ 383*70mm
Input Voltage: AC220-240V
Colour temperature: 2700-6500K
Power: 24W
Lumens: 960lm
Function: Standard,
Dimmable+ CCT adjustable,
Dimmable+ CCT + RGB
PF \geq 0.5



BR153

Size: $\Phi 385 \times 80$ mm
Input Voltage: AC220-240V
Colour temperature: 2700-6500K
Power: 24W
Lumens: 1368lm
Function: Standard,
Dimmable+ CCT adjustable,
Dimmable+ CCT + RGB
PF ≥ 0.5



BR156

Size: $\Phi 385 \times 80$ mm
Input Voltage: AC220-240V
Colour temperature: 2700-6500K
Power: 24W
Lumens: 1128lm
Function: Standard,
Dimmable+ CCT adjustable,
Dimmable+ CCT + RGB
PF ≥ 0.5



BR154

Size: $\Phi 410 \times 85$ mm
Input Voltage: AC220-240V
Colour temperature: 2700-6500K
Power: 24W
Lumens: 1224lm
Function: Standard,
Dimmable+ CCT adjustable,
Dimmable+ CCT + RGB
PF ≥ 0.5



BR157

Size: $\Phi 410 \times 88$ mm
Input Voltage: AC220-240V
Colour temperature: 2700-6500K
Power: 24W
Lumens: 1228lm
Function: Standard,
Dimmable+ CCT adjustable,
Dimmable+ CCT + RGB
PF ≥ 0.5



BR155

Size: $\Phi 385 \times 77$ mm
Input Voltage: AC220-240V
Colour temperature: 2700-6500K
Power: 24W
Lumens: 1224lm
Function: Standard,
Dimmable+ CCT adjustable,
Dimmable+ CCT + RGB
PF ≥ 0.5



BR158

Size: 12W- $\Phi 262 \times 65$ mm, 18W- $\Phi 332 \times 65$ mm,
24W- $\Phi 385 \times 70$ mm
Input Voltage: AC220-240V
Colour temperature: 2700-6500K
Power: 12W, 18W, 24W
Lumens: 12W-684lm, 18W-1008lm
24W-1368lm
Function: Standard,
Dimmable+ CCT adjustable,
Dimmable+ CCT + RGB
PF ≥ 0.5



03 MICROWAVE SENSOR CEILING LIGHT



CLA16R

Size: 18W- Φ 330*70mm, 24W- Φ 330*70mm,
30W- Φ 330*70mm

Input Voltage: AC220-240V

Colour temperature: 2700-6500K

Power: 18W, 24W, 30W

Lumens: 18W-1440lm, 24W-1920lm,
30W-2700lm

Function: Standard, Microwave Sensor,
Dimmable+ CCT adjustable,
Dimmable+ CCT + RGB

PF \geq 0.5
IP44/IP65



CLA24R

Size: 18W- Φ 280*70mm, 24W- Φ 330*70mm

Input Voltage: AC220-240V

Colour temperature: 2700-6500K

Power: 18W, 24W

Lumens: 18W-1440lm, 24W-1920lm

Color: Black, White, Silver

Function: Standard, Microwave Sensor,
Dimmable+ CCT adjustable,
Dimmable+ CCT + RGB

PF \geq 0.5
IP44/IP65



White



Black




Silver

04 COLORFUL CEILING LIGHT



CLA28R

Size: $\Phi 300 \times 25$ mm
 Input Voltage: AC220-240V
 Power: 24W
 Lumens: 2200lm
 Colour temperature: 2700-6000K
 Function: Standard,
 Dimmable+ CCT adjustable,
 Dimmable+ CCT + RGB
 PF \geq 0.5



BS01S

Size: 300*300*70mm
 Input Voltage: AC220-240V
 Power: 18W, 24W
 Lumens: 18W-1013lm, 24W-1350lm
 Colour temperature: 2700-6500K
 Function: Microwave Sensor, Standard,
 Dimmable+ CCT adjustable,
 Dimmable+ CCT + RGB
 PF \geq 0.5



BR131

Size: $\Phi 310 \times 70$ mm
 Input Voltage: AC220-240V
 Power: 18W, 24W
 Lumens: 18W-1350lm, 24W-1800lm
 Colour temperature: 2700-6500K
 Function: Microwave Sensor, Standard,
 Dimmable+ CCT adjustable,
 Dimmable+ CCT +RGB
 PF \geq 0.5



05 LED MUSIC LIGHT



BS17

Size: 375*375*87mm
 Input Voltage: AC220-240V
 Colour temperature: 2700-6500K
 Power: 18W, 24W
 Lumens: 18W-1350lm,
 24W-1800lm
 Function: LED bluetooth music
 ceiling lamp with rainbow effect
 PF \geq 0.9



BS20

Size: 320*320*60mm
 Input Voltage: AC220-240V
 Colour temperature: 2700-6500K
 Power: 24W
 Lumens: 1600lm
 Function: LED bluetooth music
 ceiling lamp with rainbow effect
 PF \geq 0.5



BR101

Size: Φ 380*86mm
 Input Voltage: AC220-240V
 Colour temperature: 2700-6500K
 Power: 18W, 24W
 Lumens: 18W-1350lm,
 24W-1800lm
 Function: LED bluetooth music
 ceiling lamp with rainbow effect
 PF \geq 0.9



05 LED MUSIC LIGHT




PJ01A02

Size: <1>165*130mm
 Input Voltage: DCSV
 Power: 2W*4
 Color: White, Black
 Function: RGB, Bluetooth LED Star light Party light Projector with rainbow effect, Party light



BR127

Size: <1>390*85mm
 Input Voltage: AC220-240V
 Colour temperature: 2700-6500K
 Power: 24W
 Lumens: 24W-1600lm
 Function: LED bluetooth music ceiling lamp with rainbow effect
 PF 0.5

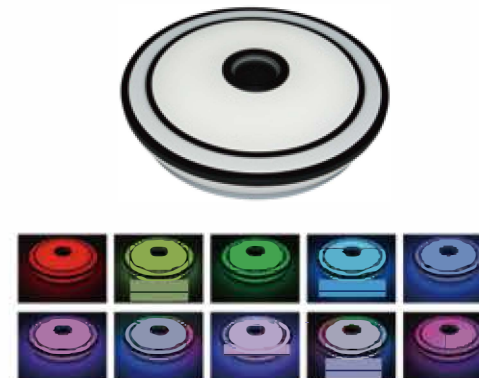

www.nelux.com.hk

sales@nelux.com.hk
salesnelux@gmail.com

neluxclients@gmail.com