

# TRACK SPOT LIGHT

Nelux Architectural Lighting Products

# SERIES

AURA  
SHINE  
ZOOM

**nelux**  
Producing your dreams

Comercial & Architectural LED lighting  
Since 2010

Scan Our QR



Producing Your Dreams

**Nelux (HK) Internation,ltd**  
nelux architectural lighting

18 Harbour road, Central Plaza, 32/F, Office 3208,  
Wanchai, HK, China  
sales@nelux.com.hk  
+852 53490724  
neluxury  
neluxlighting  
www.nelux.com.hk

## NELUX (HK) INTERNATIONAL,LTD



### NELUX ARCHITECTURAL LIGHTING architectural lighting products

## Nelux: Illuminating Excellence for Over Three Decades

With over 32 years of combined experience, Nelux has been at the forefront of the lighting industry, specializing in fixtures for diverse lighting projects. Our journey began with the same enthusiasm and dedication that drives us today. We aim to leverage our extensive expertise to contribute meaningfully to the knowledge and development of lighting solutions, catering specifically to lighting designers, architects, interior designers, and decorators.

Since the establishment of our head office in Hong Kong in 2010, Nelux has developed three primary product lines:

1. **Architectural Lighting Products:** Products to enhance the aesthetic and functional aspects of architectural spaces.
2. **Industrial Lighting:** High quality and Engineered to meet the rigorous demands of industrial environments.
3. **Bespoke Lighting Products:** Custom-designed lighting solutions that include mold management, product design, and the manufacturing of special and unique products in direct collaboration with our suppliers and customers.

## Our Expertise

At Nelux, we excel in professional mold product management and oversee the entire production process, specializing in die casting parts, CNC precision machining parts, and custom fabrication parts. Our commitment to quality is unwavering; we conduct thorough inspections and quality control throughout the entire production process.

## Our Strength

Our professional team, combined with the most advanced knowledge in lighting, empowers us to provide high-quality products with exceptional precision. We pride ourselves on our ability to deliver the best solutions tailored to your needs.

## Custom Solutions

We offer competitive quotes based on your drawings (preferred formats: STEP, DWG, and PDF) within 49 hours. Our goal is to provide you with unparalleled service and products that meet your exact specifications.



nelux


Producing your dreams




RoHS



High color rendering, close to natural light.

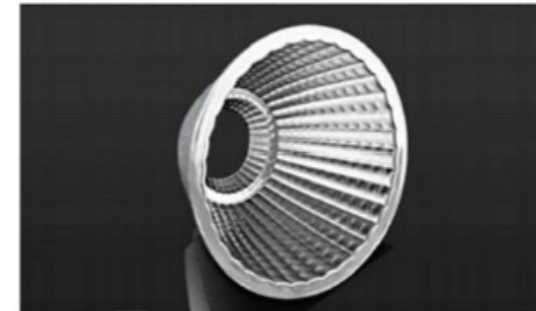


Precise light control asystem

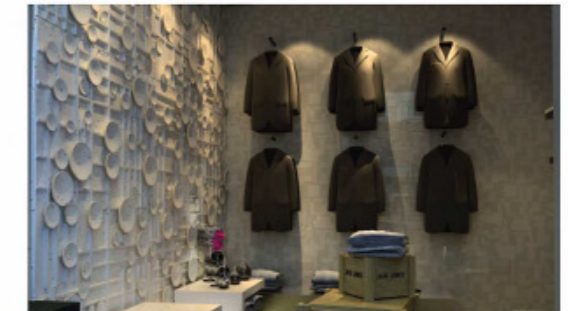

Proper and reasonable anti glare treatment



Excellent color stability

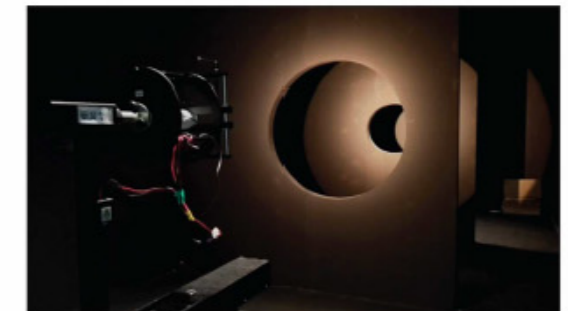

Comply with relevant international certification standards



Art and craft design

# Track Spotlight



# Track Spotlight Aura series




## Reference Information

System Power	System Power	Beam Angle	Luminous Flux	CCT	CRI	Color
<b>T-6202</b>	28W	12°/30°/45°/60°	2400LM/2500LM	3000K/4000K	>90	<input type="radio"/> WH <input checked="" type="radio"/> BL <input type="radio"/> GR

## Light Distribution

28W

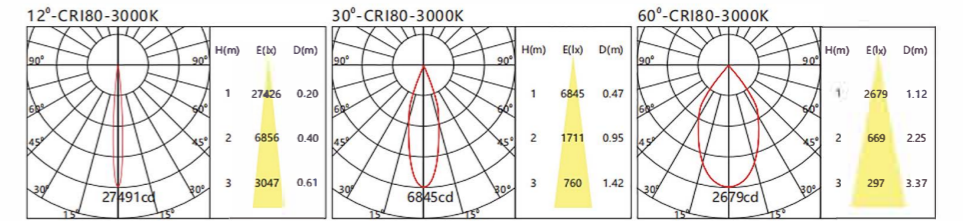


## Reference Information

System Power	System Power	Beam Angle	Luminous Flux	CCT	CRI	Color
<b>T-6203</b>	35W	12°/30°/45°	3700LM/3800LM	3000K/4000K	>90	<input type="radio"/> WH <input checked="" type="radio"/> BL <input type="radio"/> GR

## Light Distribution

35W

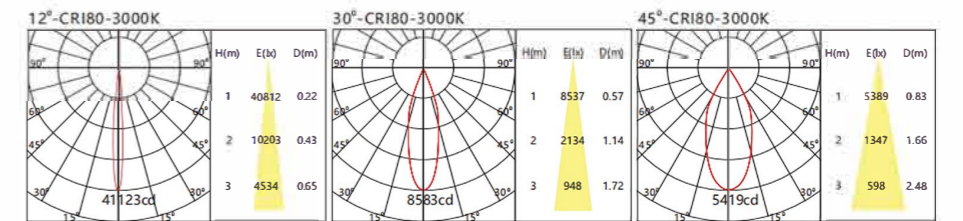


## Reference Information


System Power	System Power	Beam Angle	Luminous Flux	CCT	CRI	Color
<b>T-6204</b>	43W	12°/30°/45°/60°	3900LM/4000LM	3000K/4000K	>90	<input type="radio"/> WH <input checked="" type="radio"/> BL <input type="radio"/> GR

## Light Distribution

43W

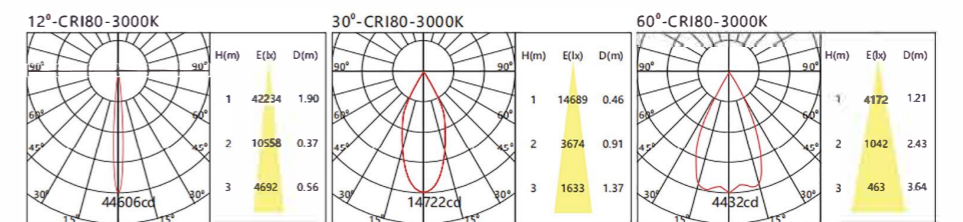

Track Spotlight Shine series



Track Spotlight Shine series




Reference Information

System Power	System Power	Beam Angle	Luminous Flux	CCT	CRI	Color
T-2034	16W	12°/20°/35°	1250LM	3000K	> 90	WH ● BL ● GR

Light Distribution

16W

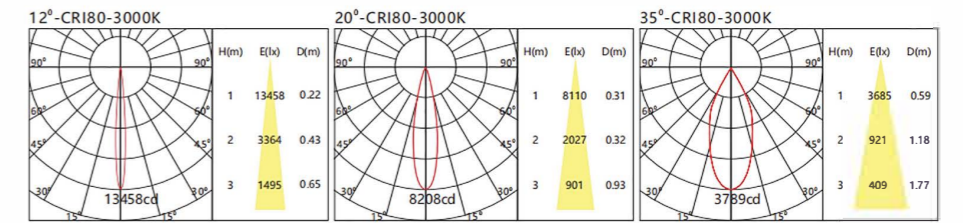


Reference Information

System Power	System Power	Beam Angle	Luminous Flux	CCT	CRI	Color
T-2039	30W	12°/20°/35°	2350LM	3000K	> 90	WH ● BL ● GR

Light Distribution

30W

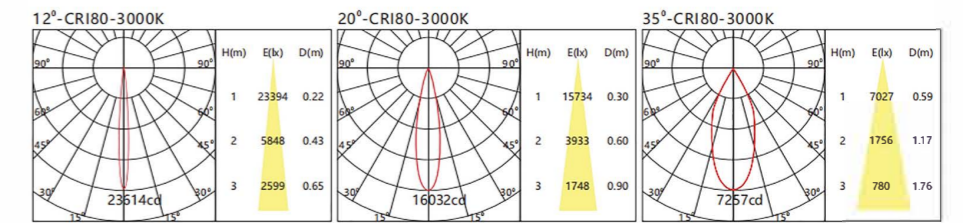

Specifications:

- .Material: High-quality extruded aluminum
- .Rotates 355°in horizontal, tilts 90°in vertical
- .Adapter: 3-Circuits/1-Circuit
- .LED type: SMD
- .Color temperature: 2700K/3000K/3500K/4000K/5000K/6000K/6500K/Dim to warm/Tunable White
- .Color rendering index: CRI>80/CRI>90/CRI>97
- .Dimming: ON-Off/DALI/0-10V/Triac/Casambi
- .Input Voltage: 220-240V AC/50-60Hz
- .Operating Temperature Range: -20° to 40°
- .Rated life hours: 30000H/50000H LM80
- .Color: White (RAL9003)/Grey(RAL9006)/Black (RAL9005)/Customized color





# Track Spotlight



## Track Spotlight Zoom series




### Reference Information

System Power	System Power	Beam Angle	Luminous Flux	CCT	CRI	Color
<b>T-4823</b>	20W	6°-60°	400-920LM	3000K	>90	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BL <input type="checkbox"/> GR

### Light Distribution

20W

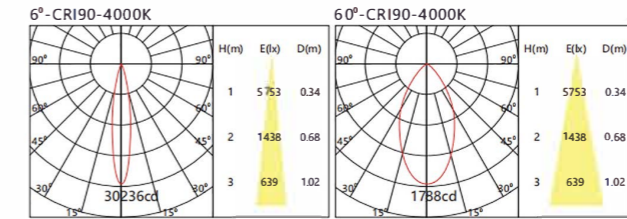


### Reference Information

System Power	System Power	Beam Angle	Luminous Flux	CCT	CRI	Color
<b>T-4824</b>	24W	15°/24°/36°	2540LM	3000K	>90	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BL <input type="checkbox"/> GR

### Light Distribution

24W

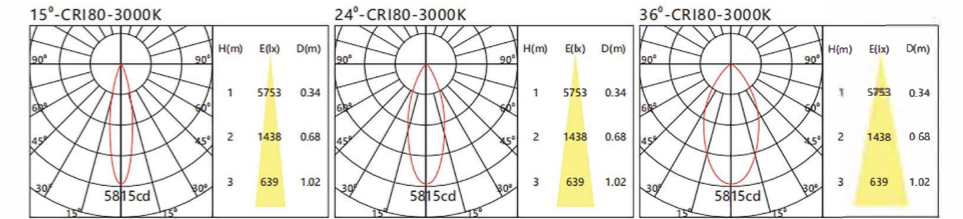


### Reference Information


System Power	System Power	Beam Angle	Luminous Flux	CCT	CRI	Color
<b>T-4825</b>	25W	6°-60°	1010LM	3000K	>90	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BL <input type="checkbox"/> GR

### Light Distribution

25W

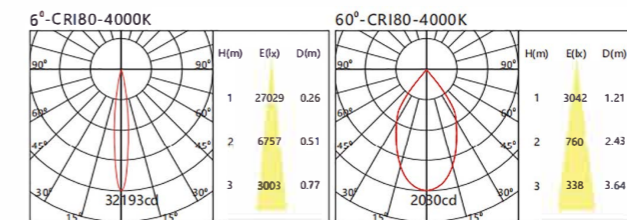

## Track Spotlight Zoom series





### Reference Information

System Power	System Power	Beam Angle	Luminous Flux	CCT	CRI	Color
<b>T-6551</b>	6W	15°-45°	480LM	3000K	>90	<input type="radio"/> WH <input checked="" type="radio"/> BL <input type="radio"/> GR

### Light Distribution

6W


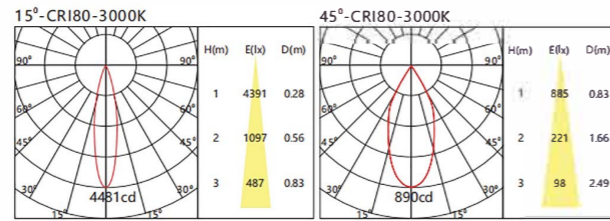


### Reference Information

System Power	System Power	Beam Angle	Luminous Flux	CCT	CRI	Color
<b>T-6552</b>	10W	15°-60°	800LM	3000K	>90	<input type="radio"/> WH <input checked="" type="radio"/> BL <input type="radio"/> GR

### Light Distribution

10W

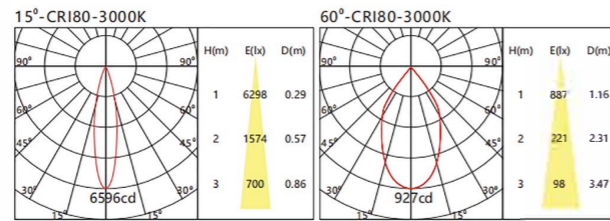


### Reference Information

System Power	System Power	Beam Angle	Luminous Flux	CCT	CRI	Color
<b>T-6553</b>	15W	15°-50°	1200LM	3000K	>90	<input type="radio"/> WH <input checked="" type="radio"/> BL <input type="radio"/> GR

### Light Distribution

15W


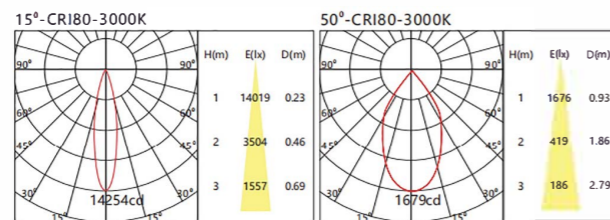


## Track Spotlight





Track Spotlight Zoom series

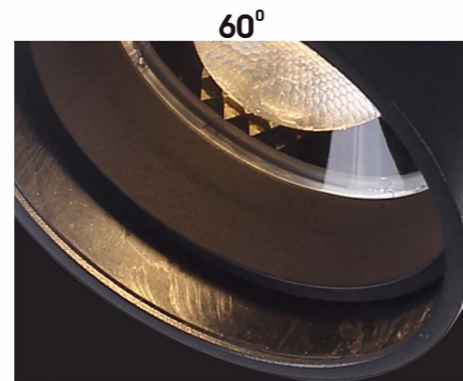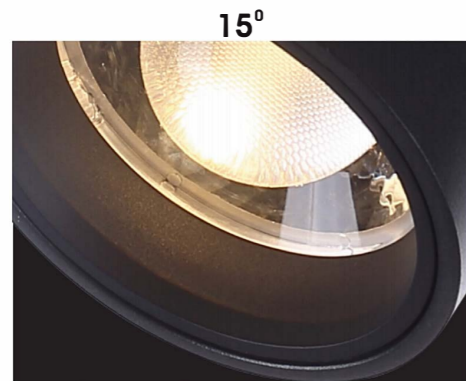

Track Spotlight Zoom series




Reference Information

System Power	System Power	Beam Angle	Luminous Flux	CCT	CRI	Color
T-4215	28W	15°-60°	2290-3040LM	3000K	>90	WH ● BL ● GR

Light Distribution

28W

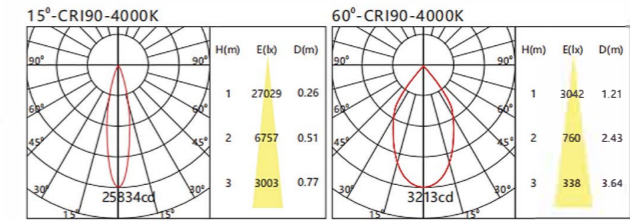


Reference Information

System Power	System Power	Beam Angle	Luminous Flux	CCT	CRI	Color
T-6255	28W	15°-60°	2290-3040LM	3000K	>90	WH ● BL ● GR

Light Distribution

28W

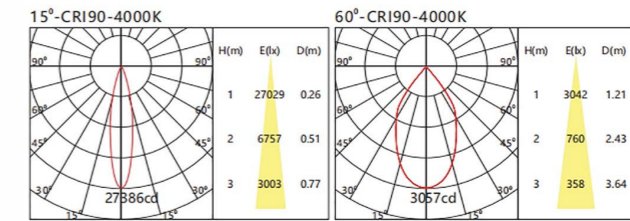


Reference Information

System Power	System Power	Beam Angle	Luminous Flux	CCT	CRI	Color
T-4255	25W	15°-60°	1010LM	3000K	>90	WH ● BL ● GR

Light Distribution

28W

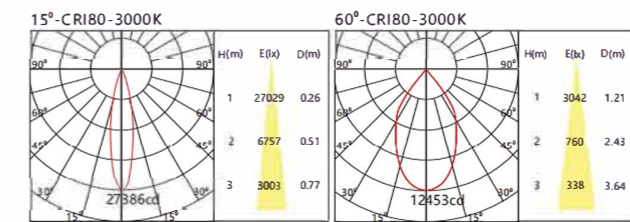



Track Spotlight Zoom series



Track Spotlight Zoom series




Reference Information

System Power	System Power	Beam Angle	Luminous Flux	CCT	CRI	Color
<b>T-4814</b>	20W	15°-45°	1550-1870LM	3000K	>90	WH ● BL ● GR

Light Distribution

20W

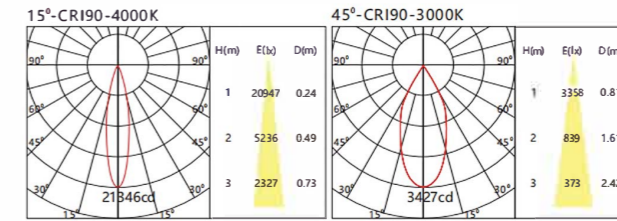


Reference Information

System Power	System Power	Beam Angle	Luminous Flux	CCT	CRI	Color
<b>T-4815</b>	28W	15°-60°	2290-3040LM	3000K	>90	WH ● BL ● GR

Light Distribution

28W

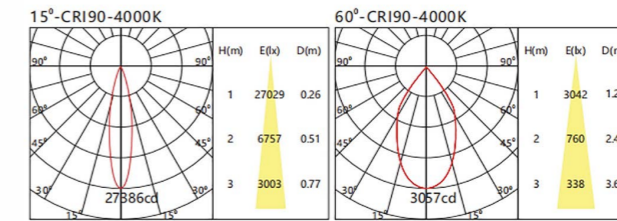


Reference Information

System Power	System Power	Beam Angle	Luminous Flux	CCT	CRI	Color
<b>T-4816</b>	35W	15°-60°	2700-3230LM	3000K	>90	WH ● BL ● GR

Light Distribution

35W

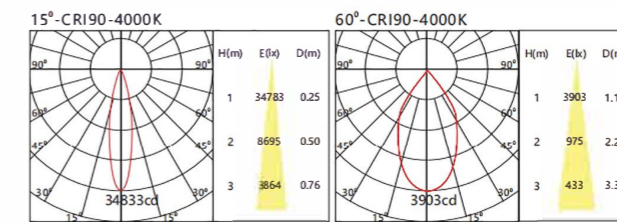

Track Spotlight Zoom series



Track Spotlight Zoom series




Reference Information

System Power	System Power	Beam Angle	Luminous Flux	CCT	CRI	Color
<b>T-6154</b>	20W	15°-45°	1550-1870LM	3000K	>90	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BL <input type="checkbox"/> GR

Light Distribution

20W

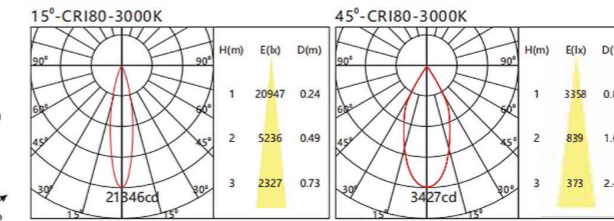


Reference Information

System Power	System Power	Beam Angle	Luminous Flux	CCT	CRI	Color
<b>T-6155</b>	28W	25°-60°	2290-3040LM	3000K	>90	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BL <input type="checkbox"/> GR

Light Distribution

28W

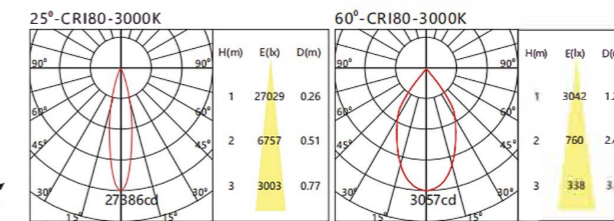


Reference Information

System Power	System Power	Beam Angle	Luminous Flux	CCT	CRI	Color
<b>T-6156</b>	35W	15°-60°	2700-3230LM	3000K	>90	<input type="checkbox"/> WH <input checked="" type="checkbox"/> BL <input type="checkbox"/> GR

Light Distribution

35W

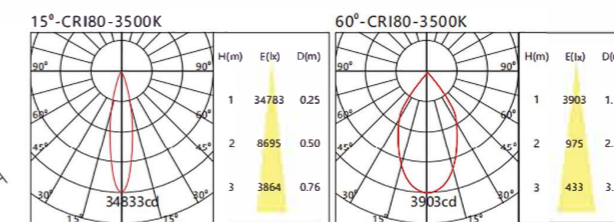



Track Spotlight Zoom series





Reference Information

System Power	System Power	Beam Angle	Luminous Flux	CCT	CRI	Color
<b>T-6554</b>	20W	15°-45°	1550-1870LM	3000K	>90	WH BL GR

Light Distribution

20W

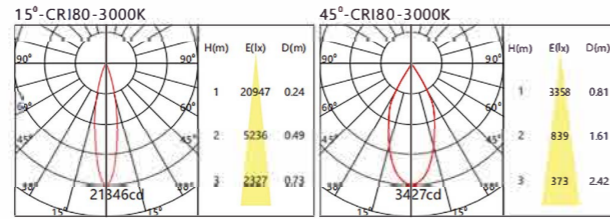



Reference Information

System Power	System Power	Beam Angle	Luminous Flux	CCT	CRI	Color
<b>T-6555</b>	28W	15°-60°	2290-3040LM	3000K	>90	WH BL GR

Light Distribution

28W

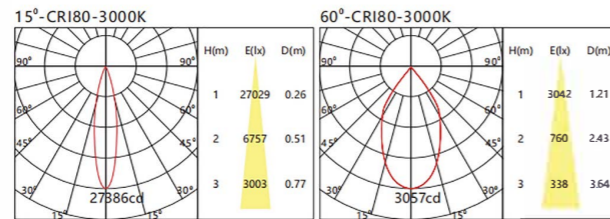



Reference Information

System Power	System Power	Beam Angle	Luminous Flux	CCT	CRI	Color
<b>T-6556</b>	35W	15°-60°	2700-3230LM	3000K	>90	WH BL GR

Light Distribution

35W

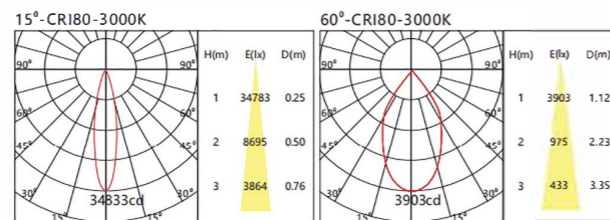

Track Spotlight Zoom series



ORDERING CODE: D100

TECHNICAL DETAIL: The Europe Apply to 3 circuits adaptor  
 Rating: 10A/220-250V  
 Color: Black / White / Silver

