

Linear Light Profiles


Suspended Linear Light
Surface Mounted Linear Light
Recessed Linear Light
Wall Mounted Linear Light

LINEAR LIGHT PROFILES

CATALOG 2023-2024

NELUX ARCHITECTURAL LIGHTING PRODUCTS



LL101-LL155-LL129 Suspended and Surface Mounted




General Features

- * Straight line design style, can be seamless connection with any dimension
- * Aluminum + PC
- * Available to be grouped to different patterns according to architecture style of your space
- * High efficiency and energy saving
- * CCT 3000K, 4000K, 5000K
- * Optional Different dimming modes: 0-10V, Dali, Triac, RGBW
- * PF >0.9
- * Led Osram
- * Applications: Supermarket, Hospital, Shoppin mall, Offices, museum, public building, colleges, ..


Installation




Product Photo

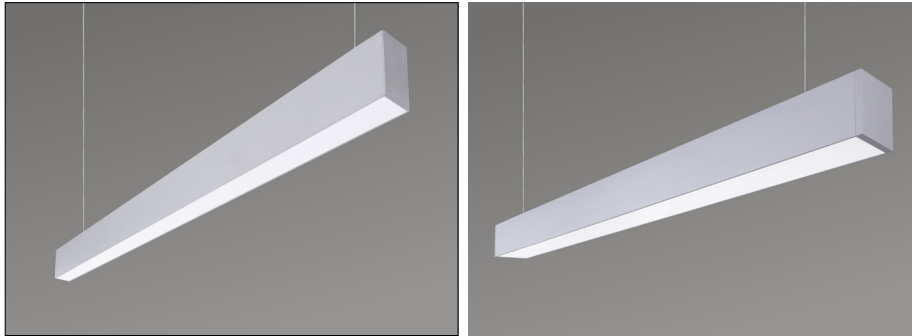

Size Profiles

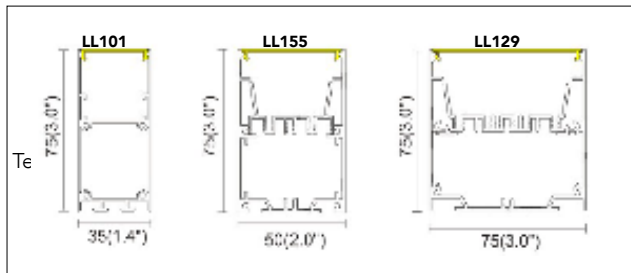


Distribution Curve

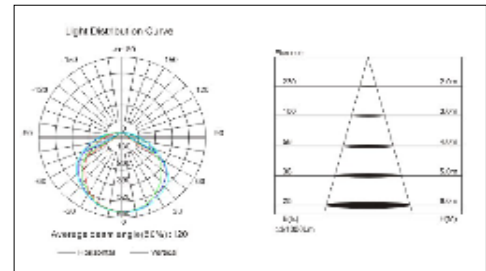

Technical Data / Datos técnicos


Model	Input Voltage	Power	CRI	Lumens/W	Beam Angle	Installation	Size(mm) W*H*L	Size(Inch) W*H*L
LL101-1200		36W	>80 or >90	105lm/W	120°		35*75*1200	1.4*3.0*47.2
LL101-1500	AC220-240V/AC120-277V 50/60Hz	50W	>80 or >90	105lm/W	120°	Suspended/Surface Mounted	35*75*1500	1.4*3.0*59.1
LL101-2400		70W	>80 or >90	105lm/W	120°		35*75*2400	1.4*3.0*94.2
LL155-1200		40W	>80 or >90	105lm/W	120°		50*75*1200	2.0*3.0*47.2
LL155-1500	AC220-240V/AC120-277V 50/60Hz	50W	>80 or >90	105lm/W	120°	Suspended/Surface Mounted	50*75*1500	2.0*3.0*59.1
LL155-2400		80W	>80 or >90	105lm/W	120°		50*75*2400	2.0*3.0*94.5
LL129-1200		50W	>80 or >90	105lm/W	120°		75*75*1200	3.0*3.0*47.2
LL129-1500	AC220-240V/AC120-277V 50/60Hz	70W	>80 or >90	105lm/W	120°	Suspended/Surface Mounted	75*75*1500	3.0*3.0*59.1
LL129-2400		100W	>80 or >90	105lm/W	120°		75*75*2400	3.0*3.0*94.5

Application

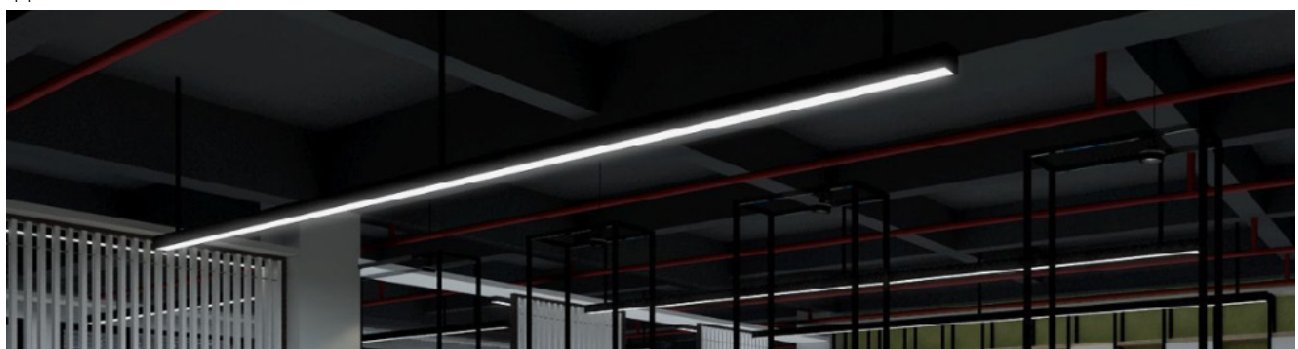

nelux (HK) international,ltd



LL126-LL130 Suspended and Surface Mounted




General Features

- * Straight line design style, can be seamless connection with any dimension
- * Aluminum + PC
- * Available to be grouped to different patterns according to architecture style of your space
- * High efficiency and energy saving
- * CCT 3000K, 4000K, 5000K
- * Optional Different dimming modes: 0-10V, Dali, Triac, RGBW
- * PF >0.9
- * Led Osram
- * Applications: Supermarket, Hospital, Shoppin mall, Offices, museum, public building, colleges, ..



Installation




Product Photo

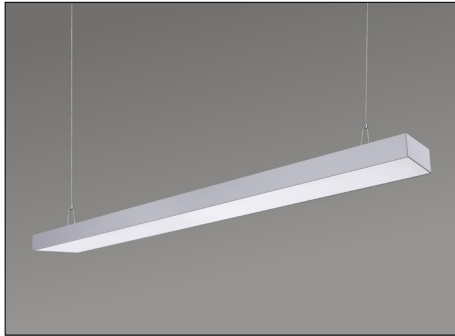

Size Profiles




Distribution Curve

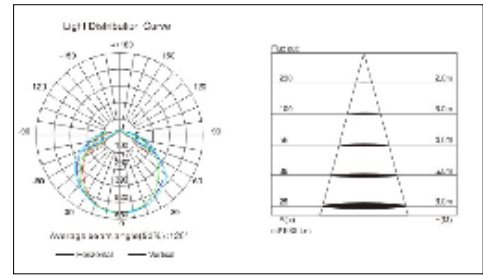

Technical Data / Datos técnicos


Model	Input Voltage	Power	-CRI	Lumens/W	Beam Angle	Installation	Size(mm) W*H*L	Size(Inch) W*H*L
LL126-1200		60W	>80 or >90	105lm/W	120°		100*70*1200	3.9*2.8*47.2
LL126-1500	AC220-240V/AC120-277V 50/60Hz	100W	>80 or >90	105lm/W	120°	Suspended/Surface Mounted	100*70*1500	3.9*2.8*59.1
LL126-2400		120W	>80 or >90	105lm/W	120°		100*70*2400	3.9*2.8*94.2
LL130-1200		60W	>80 or >90	105lm/W	120°		120*70*1200	4.7*2.8*47.2
LL130-1500	AC220-240V/AC120-277V 50/60Hz	100W	>80 or >90	105lm/W	120°	Suspended/Surface Mounted	120*70*1500	4.7*2.8*59.1
LL130-2400		120W	>80 or >90	105lm/W	120°		120*70*2400	4.7*2.8*94.5

Application

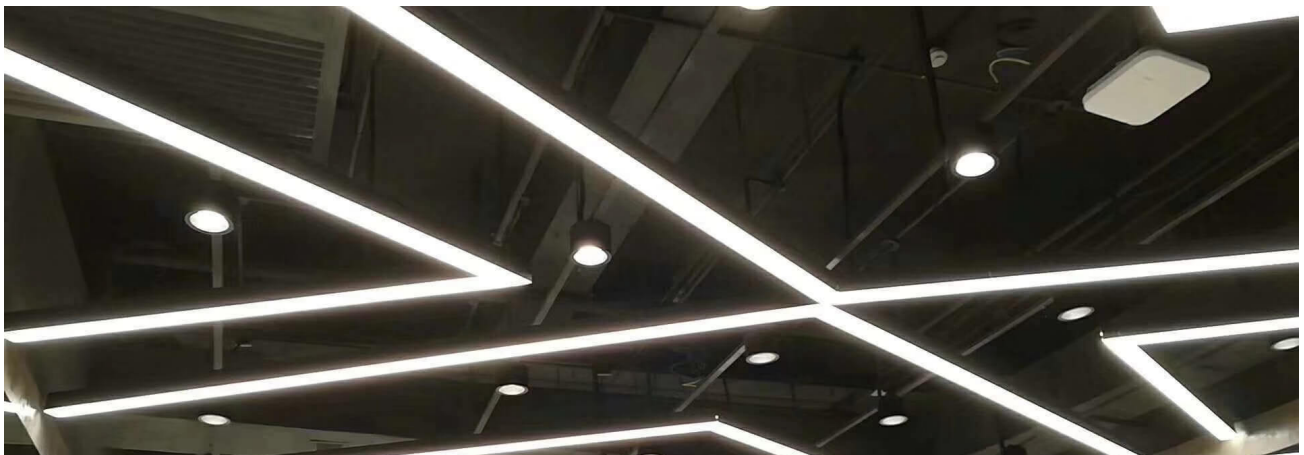

nelux (HK) international,ltd


LL192 Suspended and Surface Mounted




General Features

- * Straight line design style, can be seamless connection with any dimension
- * Aluminum + PMMA
- * Available to be grouped to different patterns according to architecture style of your space
- * High efficiency and energy saving
- * CCT 3000K, 4000K, 5000K
- * Optional Different dimming modes: 0-10V, Dali, Triac, RGBW
- * PF >0.9
- * Led Osram
- * Applications: Supermarket, Hospital, Shoppin mall, Offices, museum, public building, colleges, ..


Product Photo

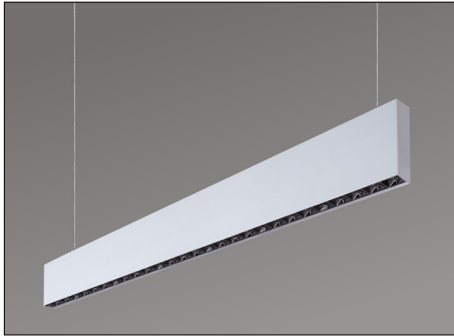


Installation



Size Profiles



Distribution Curve

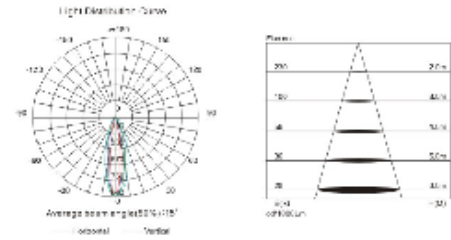


Technical Data / Datos técnicos

Model	Input Voltage	Power	-CRI	Lumens/W	Beam Angle	Installation	Size(mm) W*H*L	Size(Inch) W*H*L
LL192-1200		36W	>80 or >90	105lm/W	15°, 24°, 36°		16*70*1200	0.6*2.8*47.2
LL192-1500	AC220-240V/AC120-277V 50/60Hz	50W	>80 or >90	105lm/W	15°, 24°, 36°	Suspended/Surface Mounted	16*70*1500	0.6*2.8*59.1
LL192-2400		70W	>80 or >90	105lm/W	15°, 24°, 36°		16*70*2400	0.6*2.8*94.2

Application





LL120-LL124-LL178 Suspended and Surface Mounted



General Features

- * Straight line design style, can be seamless connection with any dimension
- * Aluminum + PC
- * Available to be grouped to different patterns according to architecture style of your space
- * High efficiency and energy saving
- * CCT 3000K, 4000K, 5000K
- * Optional Different dimming modes: 0-10V, Dali, Triac, RGBW
- * PF >0.9
- * Led Osram
- * Applications: Supermarket, Hospital, Shoppin mall, Offices, museum, public building, colleges, ..


Installation




Product Photo



Size Profiles

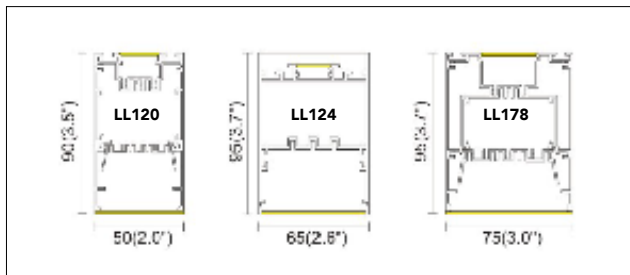


Distribution Curve

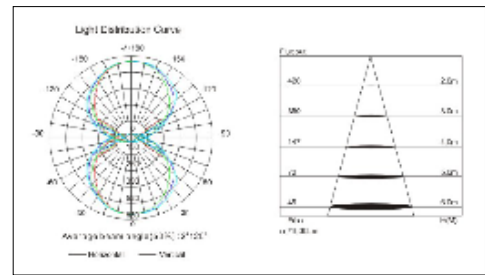

Technical Data / Datos técnicos


Model	Input Voltage	Power	CRI	Lumens/W	Beam Angle	Installation	Size(mm) W*H*L	Size(Inch) W*H*L
LL120-1200		50W	>80 or >90	105lm/W	120°*2		50*90*1200	2.0*3.5*47.2
LL120-1500	AC220-240V/AC120-277V 50/60Hz	70W	>80 or >90	105lm/W	120°*2	Suspended/Surface Mounted	50*90*1500	2.0*3.5*59.1
LL120-2400		100W	>80 or >90	105lm/W	120°*2		50*90*2400	2.0*3.5*94.2
LL124-1200		60W	>80 or >90	105lm/W	120°*2		65*95*1200	2.6*3.7*47.2
LL124-1500	AC220-240V/AC120-277V 50/60Hz	100W	>80 or >90	105lm/W	120°*2	Suspended/Surface Mounted	65*95*1500	2.6*3.7*59.1
LL124-2400		120W	>80 or >90	105lm/W	120°*2		65*95*2400	2.6*3.7*94.5
LL178-1200		60W	>80 or >90	105lm/W	120°*2		75*95*1200	3.0*3.7*47.2
LL178-1500	AC220-240V/AC120-277V 50/60Hz	100W	>80 or >90	105lm/W	120°*2	Suspended/Surface Mounted	75*95*1500	3.0*3.7*59.1
LL178-2400		120W	>80 or >90	105lm/W	120°*2		75*95*2400	3.0*3.7*94.5

Application

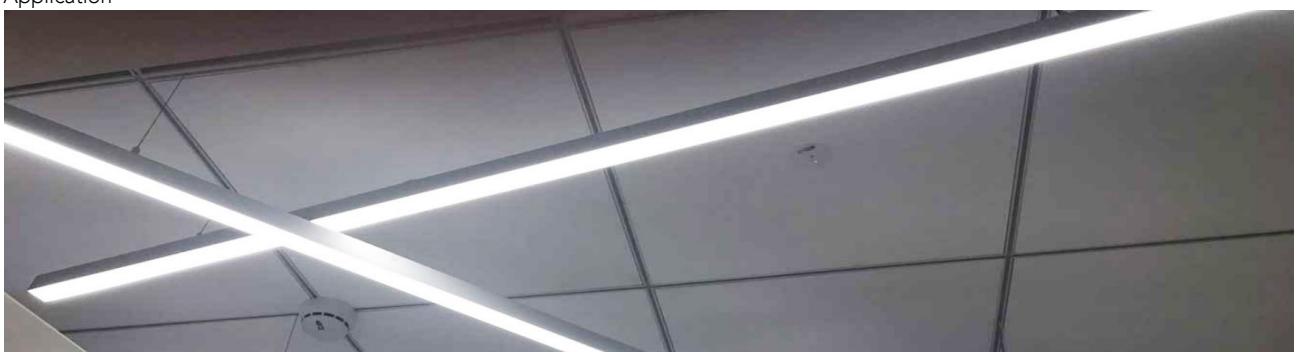

nelux (HK) international,ltd



LL134-LL135-LL137 Suspended and Surface Mounted




General Features

- * Straight line design style, can be seamless connection with any dimension
- * Aluminum + PC
- * Available to be grouped to different patterns according to architecture style of your space
- * High efficiency and energy saving
- * CCT 3000K, 4000K, 5000K
- * Optional Different dimming modes: 0-10V, Dali, Triac, RGBW
- * PF >0.9
- * Led Osram
- * Applications: Supermarket, Hospital, Shoppin mall, Offices, museum, public building, colleges, ..


Installation




Product Photo

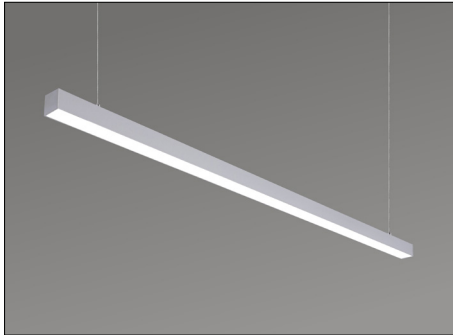

Size Profiles

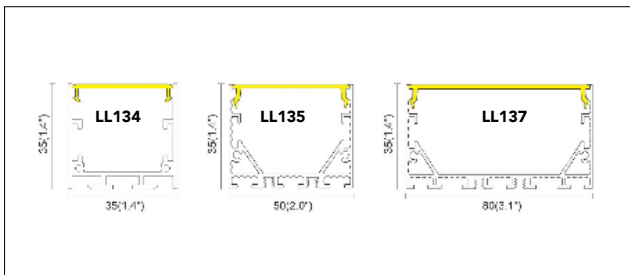


Distribution Curve

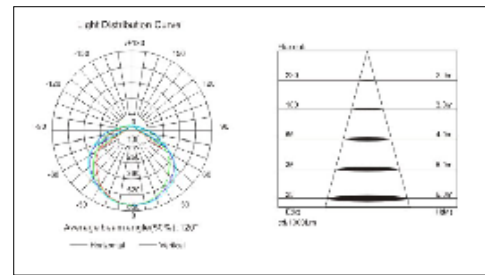

Technical Data / Datos técnicos


Model	Input Voltage	Power	CRI	Lumens/W	Beam Angle	Installation	Size(mm) W*H*L	Size(Inch) W*H*L
LL134-1200		25W	>80 or >90	105lm/W	120°		35*35*1200	1.4*1.4*47.2
LL134-1500	AC220-240V/AC120-277V 50/60Hz	36W	>80 or >90	105lm/W	120°	Suspended/Surface Mounted	35*35*1500	1.4*1.4*59.1
LL134-2400		50W	>80 or >90	105lm/W	120°		35*35*2400	1.4*1.4*94.2
LL135-1200		25W	>80 or >90	105lm/W	120°		50*35*1200	2.0*1.4*47.2
LL135-1500	AC220-240V/AC120-277V 50/60Hz	36W	>80 or >90	105lm/W	120°	Suspended/Surface Mounted	50*35*1500	2.0*1.4*59.1
LL135-2400		50W	>80 or >90	105lm/W	120°		50*35*2400	2.0*1.4*94.5
LL170-1200		36W	>80 or >90	105lm/W	120°		80*35*1200	3.1*1.4*47.2
LL170-1500	AC220-240V/AC120-277V 50/60Hz	60W	>80 or >90	105lm/W	120°	Suspended/Surface Mounted	80*35*1500	3.1*1.4*59.1
LL170-2400		70W	>80 or >90	105lm/W	120°		80*35*2400	3.1*1.4*94.5

Application

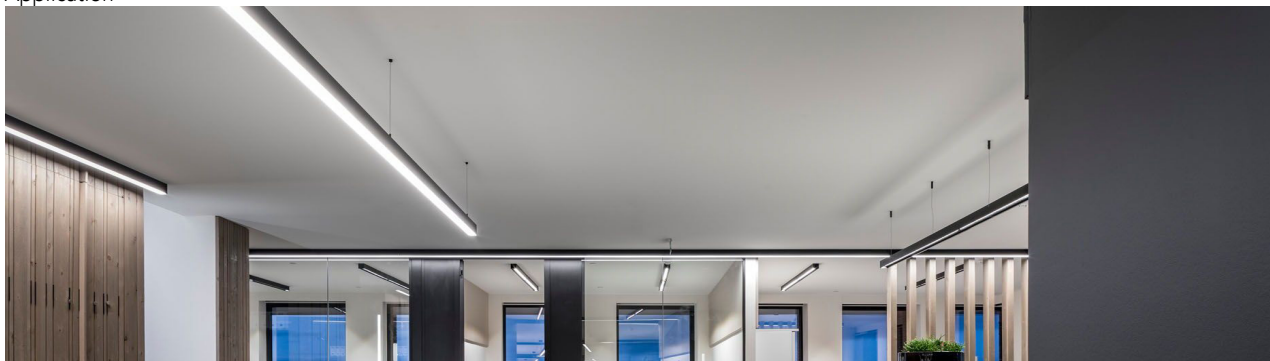

nelux (HK) international,ltd



LL140-LL141-LL142 Suspended and Surface Mounted




General Features

- * Straight line design style, can be seamless connection with any dimension
- * Aluminum + PMMA
- * Available to be grouped to different patterns according to architecture style of your space
- * High efficiency and energy saving
- * CCT 3000K, 4000K, 5000K
- * Optional Different dimming modes: 0-10V, Dali, Triac, RGBW
- * PF >0.9
- * Led Osram
- * Applications: Supermarket, Hospital, Shoppin mall, Offices, museum, public building, colleges, ..


Installation




Product Photo

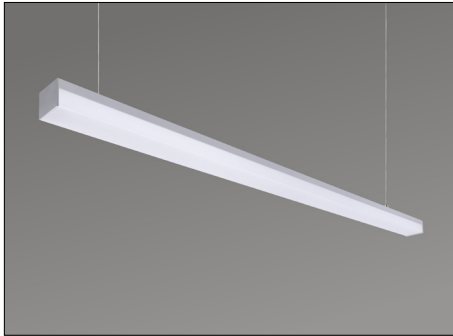

Size Profiles

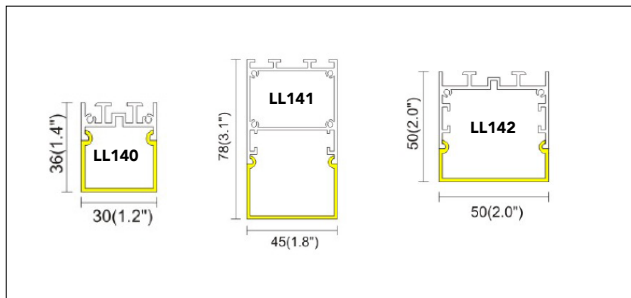

Distribution Curve

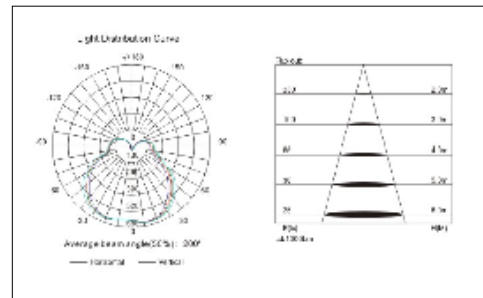

Technical Data / Datos técnicos


Model	Input Voltage	Power	CRI	Lumens/W	Beam Angle	Installation	Size(mm) W*H*L	Size(Inch) W*H*L
LL140-1200		25W	>80 or >90	105lm/W	200°		35*36*1200	1.2*1.4*47.2
LL140-1500	AC220-240V/AC120-277V 50/60Hz	36W	>80 or >90	105lm/W	200°	Suspended/Surface Mounted	35*36*1500	1.2*1.4*59.1
LL140-2400		50W	>80 or >90	105lm/W	200°		35*36*2400	1.2*1.4*94.2
LL141-1200		25W	>80 or >90	105lm/W	200°		45*78*1200	1.8*3.1*47.2
LL141-1500	AC220-240V/AC120-277V 50/60Hz	36W	>80 or >90	105lm/W	200°	Suspended/Surface Mounted	45*78*1500	1.8*3.1*59.1
LL141-2400		50W	>80 or >90	105lm/W	200°		45*78*2400	1.8*3.1*94.5
LL142-1200		25W	>80 or >90	105lm/W	200°		50*50*1200	2.0*2.0*47.2
LL142-1500	AC220-240V/AC120-277V 50/60Hz	36W	>80 or >90	105lm/W	200°	Suspended/Surface Mounted	50*50*1500	2.0*2.0*59.1
LL142-2400		50W	>80 or >90	105lm/W	200°		50*50*2400	2.0*2.0*94.5

Application



nelux (HK) international,ltd


LL108 Suspended and Surface Mounted




General Features

- * Straight line design style, can be seamless connection with any dimension
- * Aluminum + PMMA
- * Available to be grouped to different patterns according to architecture style of your space
- * High efficiency and energy saving
- * CCT 3000K, 4000K, 5000K
- * Optional Different dimming modes: 0-10V, Dali, Triac, RGBW
- * PF >0.9
- * Led Osram
- * Applications: Supermarket, Hospital, Shoppin mall, Offices, museum, public building, colleges, ..


Installation




Product Photo

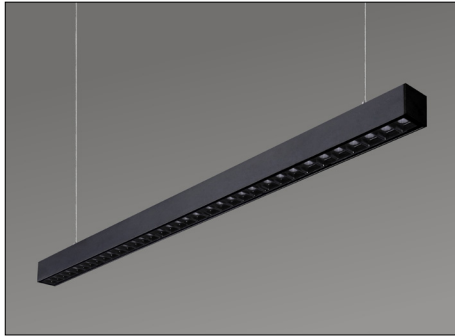

Size Profiles




Distribution Curve

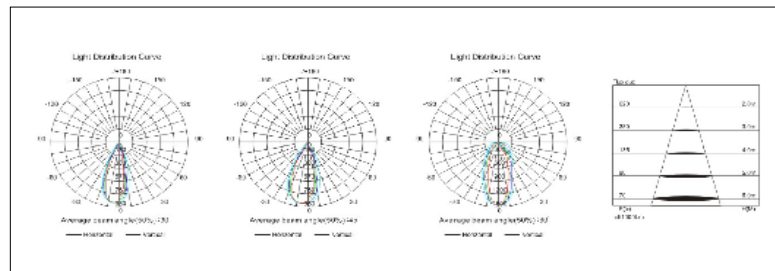

Technical Data / Datos técnicos


Model	Input Voltage	Power	-CRI	Lumens/W	Beam Angle	Installation	Size(mm) W*H*L	Size(Inch) W*H*L
LL108-1200		36W	>80 or >90	80lm/W	30°, 45°, 60°		43*66*1200	1.7*2.6*47.2
LL108-1500	AC220-240V/AC120-277V 50/60Hz	50W	>80 or >90	80lm/W	30°, 45°, 60°	Suspended/Surface Mounted	43*66*1500	1.7*2.6*59.1
LL108-2400		70W	>80 or >90	80lm/W	30°, 45°, 60°		43*66*2400	1.7*2.6*94.2

Application

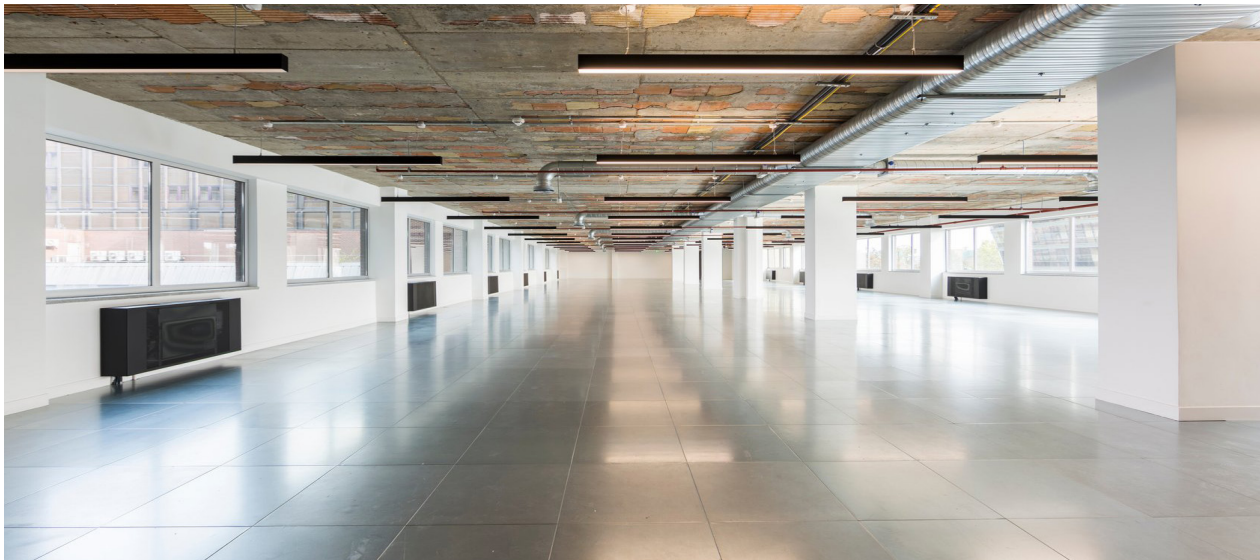

nelux (HK) international,ltd

LL105-LL106-LL147 Recessed



General Features

- * Straight line design style, can be seamless connection with any dimension
- * Aluminum + PC
- * Available to be grouped to different patterns according to architecture style of your space
- * High efficiency and energy saving
- * CCT 3000K, 4000K, 5000K
- * Optional Different dimming modes: 0-10V, Dali, Triac, RGBW
- * PF >0.9
- * Led Osram
- * Applications: Supermarket, Hospital, Shoppin mall, Offices, museum, public building, colleges, ..


Installation
Recessed




Product Photo



Size Profiles

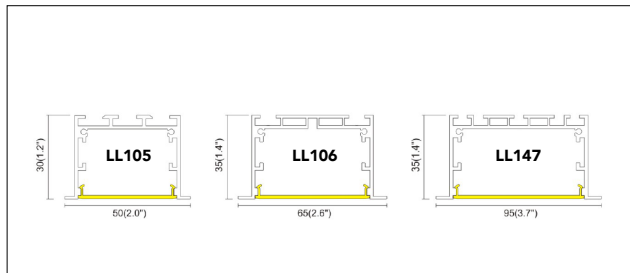


Distribution Curve

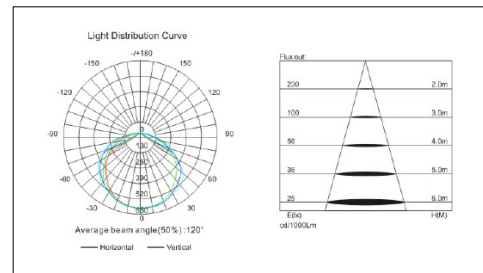

Technical Data / Datos técnicos


Model	Input Voltage	Power	CRI	Lumens/W	Beam Angle	Installation	Size(mm) W*H*L	Size(Inch) W*H*L
LL105-1200		25W	>80 or >90	105lm/W	120°		50*30*1200	2.0*1.2*47.2
LL105-1500	AC220-240V/AC120-277V 50/60Hz	36W	>80 or >90	105lm/W	120°	Recessed	50*30*1500	2.0*1.2*59.1
LL105-2400		50W	>80 or >90	105lm/W	120°		50*30*2400	2.0*1.2*94.2
LL106-1200		36W	>80 or >90	105lm/W	120°		65*35*1200	2.6*1.4*47.2
LL106-1500	AC220-240V/AC120-277V 50/60Hz	50W	>80 or >90	105lm/W	120°	Recessed	65*35*1500	2.6*1.4*59.1
LL106-2400		70W	>80 or >90	105lm/W	120°		65*35*2400	2.6*1.4*94.5
LL147-1200		40W	>80 or >90	105lm/W	120°		95*35*1200	3.7*1.4*47.2
LL147-1500	AC220-240V/AC120-277V 50/60Hz	60W	>80 or >90	105lm/W	120°	Recessed	95*35*1500	3.7*1.4*59.1
LL147-2400		80W	>80 or >90	105lm/W	120°		95*35*2400	3.7*1.4*94.5

Application

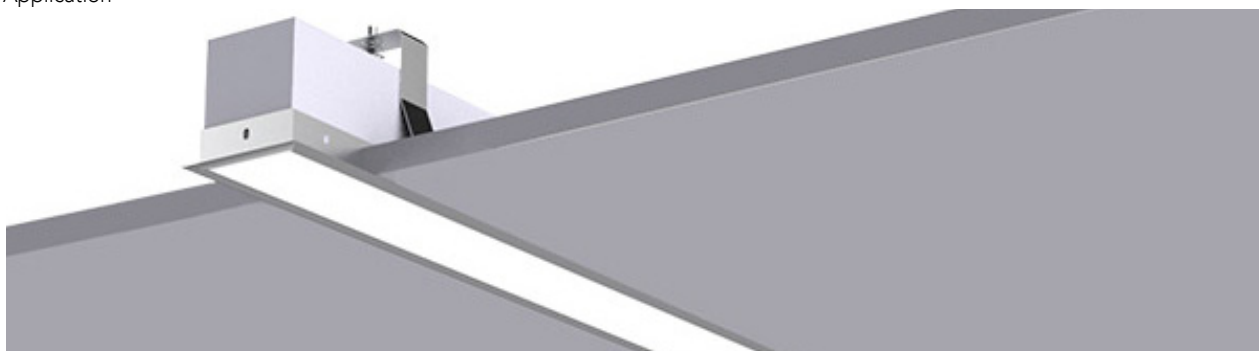

nelux (HK) international,ltd

LL148-LL149 Recessed




General Features

- * Straight line design style, can be seamless connection with any dimension
- * Aluminum + PC
- * Available to be grouped to different patterns according to architecture style of your space
- * High efficiency and energy saving
- * CCT 3000K, 4000K, 5000K
- * Optional Different dimming modes: 0-10V, Dali, Triac, RGBW
- * PF >0.9
- * Led Osram
- * Applications: Supermarket, Hospital, Shoppin mall, Offices, museum, public building, colleges, ..


Installation




Product Photo

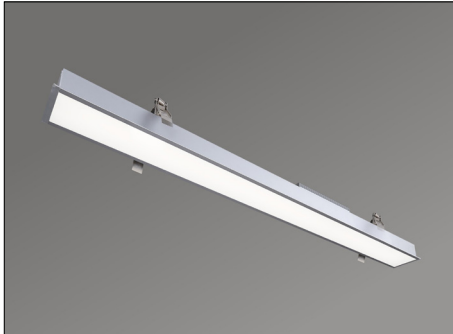

Size Profiles

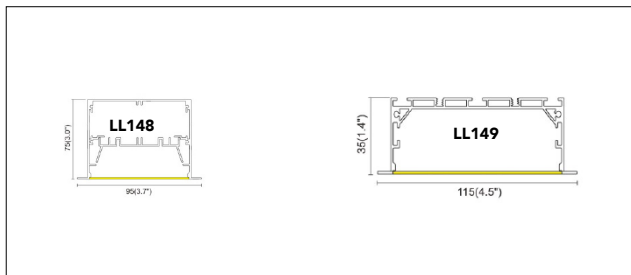


Distribution Curve

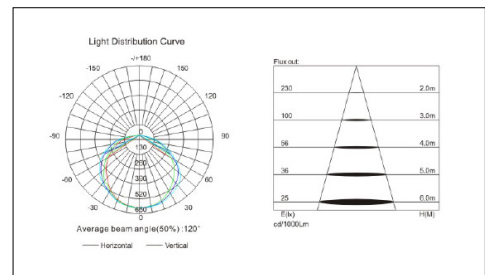

Technical Data / Datos técnicos


Model	Input Voltage	Power	CRI	Lumens/W	Beam Angle	Installation	Size(mm) W*H*L	Size(Inch) W*H*L
LL148-1200		50W	>80 or >90	105lm/W	120°		95*75*1200	3.7*3.0*47.2
LL148-1500	AC220-240V/AC120-277V 50/60Hz	70W	>80 or >90	105lm/W	120°	Recessed	95*75*1500	3.70*3.0*59.1
LL148-2400		100W	>80 or >90	105lm/W	120°		95*75*2400	3.7*3.0*94.2
LL149-1200		50W	>80 or >90	105lm/W	120°		115*35*1200	4.5*1.4*47.2
LL149-1500	AC220-240V/AC120-277V 50/60Hz	80W	>80 or >90	105lm/W	120°	Recessed	115*35*1500	4.5*1.4*59.1
LL149-2400		100W	>80 or >90	105lm/W	120°		115*35*2400	4.5*1.4*94.5

Application

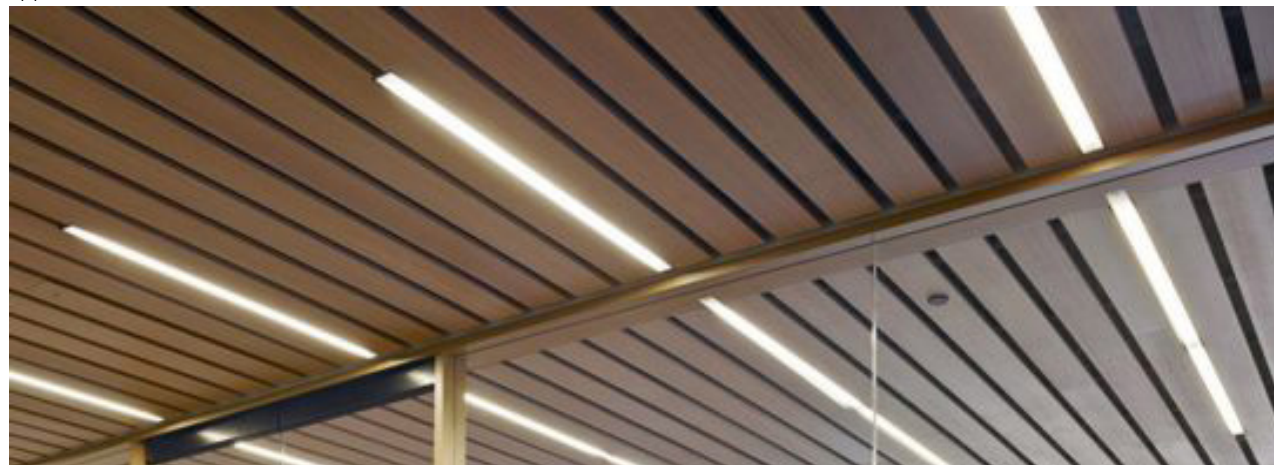

nelux (HK) international,ltd


LL120-LL124-LL146 Wall Mounted




General Features

- * Straight line design style, can be seamless connection with any dimension
- * Aluminum + PC
- * Available to be grouped to different patterns according to architecture style of your space
- * High efficiency and energy saving
- * CCT 3000K, 4000K, 5000K
- * Optional Different dimming modes: 0-10V, Dali, Triac, RGBW
- * PF >0.9
- * Led Osram
- * Applications: Supermarket, Hospital, Shoppin mall, Offices, museum, public building, colleges, ..


Product Photo

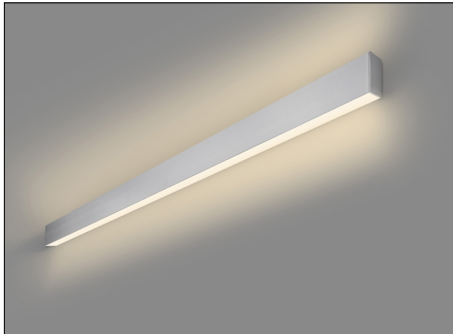


Installation Wall Mounted



Size Profiles

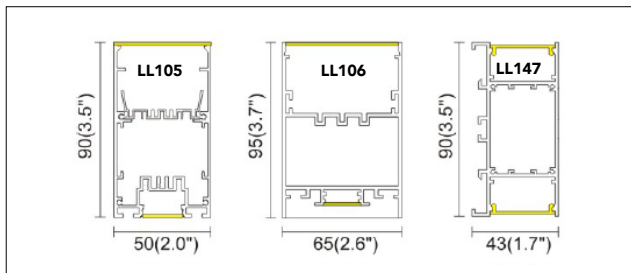

Distribution Curve

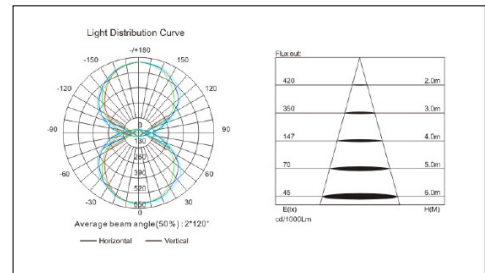

Technical Data / Datos técnicos

Model	Input Voltage	Power	CRI	Lumens/W	Beam Angle	Installation	Size(mm) W*H*L	Size(Inch) W*H*L
LL120-1200		50W	>80 or >90	105lm/W	120°*2		50*90*1200	2.0*3.5*47.2
LL120-1500	AC220-240V/AC120-277V 50/60Hz	70W	>80 or >90	105lm/W	120°*2	Wall Mounted	50*90*1500	2.0*3.5*59.1
LL120-2400		100W	>80 or >90	105lm/W	120°*2		50*90*2400	2.0*3.5*94.2
LL124-1200		60W	>80 or >90	105lm/W	120°*2		65*95*1200	2.6*3.7*47.2
LL124-1500	AC220-240V/AC120-277V 50/60Hz	100W	>80 or >90	105lm/W	120°*2	Wall Mounted	65*95*1500	2.6*3.7*59.1
LL124-2400		120W	>80 or >90	105lm/W	120°*2		65*95*2400	2.6*3.7*94.5
LL146-1200		50W	>80 or >90	105lm/W	120°*2		43*90*1200	1.7*3.5*47.2
LL146-1500	AC220-240V/AC120-277V 50/60Hz	70W	>80 or >90	105lm/W	120°*2	Wall Mounted	43*90*1500	1.7*3.5*59.1
LL146-2400		100W	>80 or >90	105lm/W	120°*2		43*90*2400	1.7*3.5*94.5

Application



nelux (HK) international,ltd

THANK YOU

CONTACT US

whatsapp +852 5349 0724

email sales@nelux.com.hk

wechat neluxury

Head Office

18 Harbour Road, Central Plaza , 32/F, offices 3208,
Wanchai, Hong Kong, China

Assembling Workshop

22 Kin Fat St. 11th Floor, Sun Hing Industrial Building,
Tuen Mun, Hong Kong, China

Circular Light Profiles


Suspended Circular Light
Circular Surface Mounted Light

CIRCULAR LIGHT PROFILES

CATALOG 2022

NELUX ARCHITECTURAL LIGHTING PRODUCTS


LL115 Circular Light - Down and Up Down - Suspended



General Features

- * Straight line design style, can be seamless connection with any dimension
- * Aluminum + PC
- * Available to be grouped to different patterns according to architecture style of your space
- * High efficiency and energy saving
- * CCT 3000K, 4000K, 5000K
- * Optional Different dimming modes: 0-10V, Dali, Triac, RGBW
- * PF >0.9
- * Led Samsung
- * Applications: Supermarket, Hospital, Shoppin mall, Offices, museum, public building, colleges, ..


Lighting
Suspended




Product Photo



Size Profiles



Distribution Curve

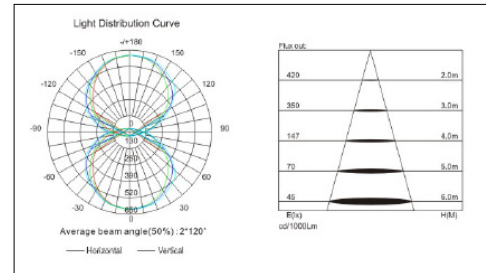

Technical Data / Datos técnicos


Model	Input Voltage	Power	-CRI	Lumens/W	Beam Angle	Installation	Size(mm) W*H*L	Size(Inch) W*H*L
LL115-80		80W					Ø900*42*68	Ø35.4*1.7*2.7
LL115-120		120W					Ø1200*42*68	Ø47.2*1.7*2.7
LL115-135		135W					Ø1500*42*68	Ø59.1*1.7*2.7
LL115-150	AC220-240V/AC120-277V 50/60Hz	150W	>80 or >90	85lm/W	120°*2	Suspended	Ø2000*42*68	Ø78.7*1.7*2.7
LL115-300		300W					Ø3000*42*68	Ø118.1*1.7*2.7
LL115-480		480W					Ø5000*42*68	Ø196.9*1.7*2.7

Application



nelux (HK) international,ltd

LL113 Circular Light - Down and Up Down - Suspended and Surface Mounted



General Features

- * Straight line design style, can be seamless connection with any dimension
- * Aluminum + PC
- * Available to be grouped to different patterns according to architecture style of your space
- * High efficiency and energy saving
- * CCT 3000K, 4000K, 5000K
- * Optional Different dimming modes: 0-10V, Dali, Triac, RGBW
- * PF >0.9
- * Led Samsung
- * Applications: Supermarket, Hospital, Shoppin mall, Offices, museum, public building, colleges, ..


Lighting
Suspended




Product Photo



Size Profiles

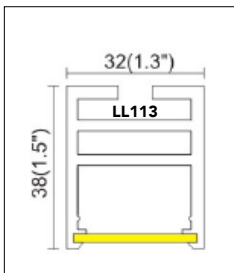


Distribution Curve

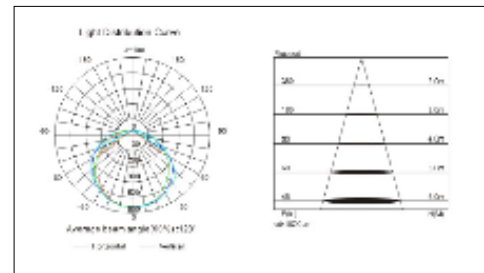

Technical Data / Datos técnicos


Model	Input Voltage	Power	-CRI	Lumens/W	Beam Angle	Installation	Size(mm) W*H*L	Size(Inch) W*H*L
LL113-40		40W					Ø600*32*38	Ø23.6*1.3*1.5
LL113-50		50W					Ø900*32*38	Ø35.4*1.3*1.5
LL113-80		80W					Ø1200*32*38	Ø47.2*1.3*1.5
LL113-100	AC220-240V/AC120-277V 50/60Hz	100W	>80 or >90	85lm/W	120°	Suspended / Mounted	Ø1500*32*38	Ø59.1*1.3*1.5
LL113-120		120W					Ø2000*32*38	Ø78.8*1.3*1.5
LL113-200		200W					Ø3000*32*38	Ø118.1*1.3*1.5
LL113-400		400W					Ø5000*32*38	Ø196.9*1.3*1.5

Application

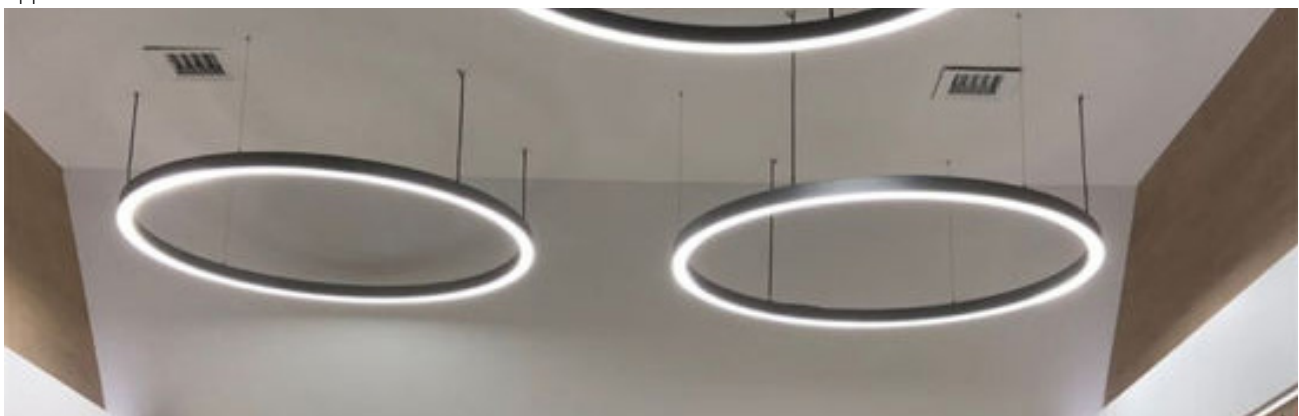

nelux (HK) international,ltd

LL125-LL126 Circular Light Suspended and Surface Mounted



General Features

- * Straight line design style, can be seamless connection with any dimension
- * Aluminum + PC
- * Available to be grouped to different patterns according to architecture style of your space
- * High efficiency and energy saving
- * CCT 3000K, 4000K, 5000K
- * Optional Different dimming modes: 0-10V, Dali, Triac, RGBW
- * PF >0.9
- * Led Samsung
- * Applications: Supermarket, Hospital, Shoppin mall, Offices, museum, public building, colleges, ..

Lighting
Suspended




Side Light

Product Photo




Distribution Curve

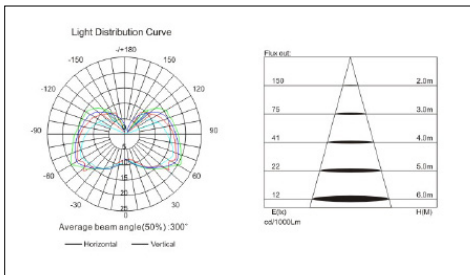

Technical Data / Datos técnicos

Model	Input Voltage	Power	-CRI	Lumens/W	Beam Angle	Installation	Size(mm) W*H*L	Size(Inch) W*H*L
LL125-32	AC220-240V/AC120-277V 50/60Hz	32W	>80 or >90	70lm/W	300°	Suspended	Ø600*32*32	Ø23.6*1.3*1.5
LL125-40		40W					Ø900*32*32	Ø35.4*1.3*1.5
LL125-70		70W					Ø1200*32*32	Ø47.2*1.3*1.5
LL125-80		80W					Ø1500*32*32	Ø59.1*1.3*1.5
LL125-32-M	AC220-240V/AC120-277V 50/60Hz	32W	>80 or >90	70lm/W	300°	Surface Mounted	Ø600*32*32	Ø23.6*1.3*1.5
LL125-40-M		40W					Ø900*32*32	Ø35.4*1.3*1.5
LL125-70-M		70W					Ø1200*32*32	Ø47.2*1.3*1.5
LL125-80-M		80W					Ø1500*32*32	Ø59.1*1.3*1.5
LL126-32	AC220-240V/AC120-277V 50/60Hz	32W	>80 or >90	70lm/W	300°	Suspended	Ø600*35*32	Ø23.6*1.4*1.3
LL126-40		40W					Ø900*35*32	Ø35.4*1.4*1.3
LL126-70		70W					Ø1200*35*32	Ø47.2*1.4*1.3
LL126-80		80W					Ø1500*35*32	Ø59.1*1.4*1.3
LL126-32-M	AC220-240V/AC120-277V 50/60Hz	32W	>80 or >90	70lm/W	300°	Surface Mounted	Ø600*35*32	Ø23.6*1.4*1.3
LL126-40-M		40W					Ø900*35*32	Ø35.4*1.4*1.3
LL126-70-M		70W					Ø1200*35*32	Ø47.2*1.4*1.3
LL126-80-M		80W					Ø1500*35*32	Ø59.1*1.4*1.3

LL112 Luna Light Suspended and Surface Mounted



General Features

- * Avant-garde design, very good performance
- * High quality materials Aluminum + PC
- * High efficiency and energy saving
- * CCT 3000K, 4000K, 5000K
- * Optional Different dimming modes: 0-10V, Dali, Triac, RGBW
- * Emergency option
- * PF >0.9
- * Led Samsung
- * Applications: Supermarket, Hospital, Shoppin mall, Offices, museum, public building, colleges, ..


Light Emission



Product Photo




Distribution Curve

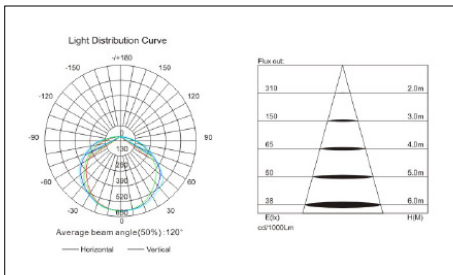

Technical Data / Datos técnicos

Model	Input Voltage	Power	-CRI	Lumens/W	Beam Angle	Installation	Size(mm) W*H*L	Size(Inch) W*H*L
LL112-15		15W					Ø300*45	Ø11.8*1.8
LL112-20		20W					Ø400*45	Ø15.7*1.8
LL112-25	AC220-240V/AC120-277V 50/60Hz	25W	>80 or >90	85lm/W	120°	Suspended	Ø480*80	Ø18.9*3.1
LL112-40		40W					Ø600*80	Ø23.6*3.1
LL112-90		90W					Ø900*80	Ø35.4*3.1
LL112-180		180W					Ø1200*80	Ø47.2*3.1
LL112-15-M		15W					Ø300*65	Ø11.8*2.6
LL112-20-M		20W					Ø400*65	Ø15.7*2.6
LL112-25-M	AC220-240V/AC120-277V 50/60Hz	25W	>80 or >90	85lm/W	120°	Surface Mounted	Ø480*95	Ø18.9*3.7
LL112-40-M		40W					Ø600*95	Ø23.6*3.7
LL112-90-M		90W					Ø900*95	Ø35.4*3.7
LL112-180-M		180W					Ø1200*95	Ø47.2*3.7

LL112 UP&DOWN Luna Light Suspended and Surface Mounted



General Features

- * Avant-garde design, very good performance
- * High quality materials Aluminum + PC
- * High efficiency and energy saving
- * CCT 3000K, 4000K, 5000K
- * Optional Different dimming modes: 0-10V, Dali, Triac, RGBW
- * Emergency option
- * PF >0.9
- * Led Samsung
- * Applications: Supermarket, Hospital, Shoppin mall, Offices, museum, public building, colleges, ..


Light Emission
Luna



Product Photo



Distribution Curve

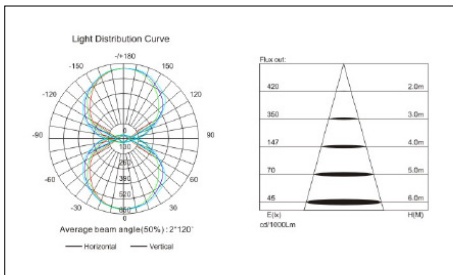

Technical Data / Datos técnicos

Model	Input Voltage	Power	-CRI	Lumens/W	Beam Angle	Installation	Size(mm) W*H*L	Size(Inch) W*H*L
LL112-50		50W					Ø480*80	Ø18.9*3.1
LL112-80		80W					Ø600*80	Ø23.6*3.1
LL112-120	AC220-240V/AC120-277V 50/60Hz	120W	>80 or >90	85lm/W	120°*2	Suspended	Ø900*80	Ø35.4*3.1
LL112-150		150W					Ø1200*80	Ø47.2*3.1
LL112-15-M		50W					Ø480*95	Ø18.9*3.7
LL112-20-M		80W					Ø600*95	Ø23.6*3.7
LL112-25-M	AC220-240V/AC120-277V 50/60Hz	120W	>80 or >90	85lm/W	120°*2	Surface Mounted	Ø900*95	Ø35.4*3.7
LL112-40-M		150W					Ø1200*95	Ø47.2*3.7

Application



nelux (HK) international,ltd

LL112 ROSCO Light Suspended and Surface Mounted




General Features

- * Avant-garde design, very good performance
- * High quality materials ABS + PC
- * High efficiency and energy saving
- * CCT 3000K, 4000K, 5000K
- * Optional Different dimming modes: 0-10V, Dali, Triac, RGBW
- * Emergency option
- * PF >0.9
- * Led Samsung
- * Applications: Supermarket, Hospital, Shoppin mall, Offices, museum, public building, colleges, ..

Product Photo



Distribution Curve

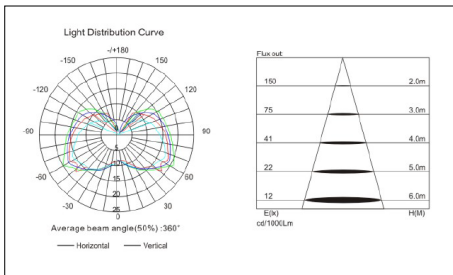

Technical Data / Datos técnicos


Model	Input Voltage	Power	-CRI	Lumens/W	Beam Angle	Installation	Size(mm) W*H*L	Size(Inch) W*H*L
LL175-25		25W					Ø470*80	Ø18.5*3.1
LL175-36	AC220-240V/AC120-277V 50/60Hz	36W	>80	70lm/W	360°	Suspended	Ø600*80	Ø23.6*3.1
LL175-45		45W					Ø800*80	Ø31.5*3.1
LL175-25-M		25W					Ø470*120	Ø18.5*4.7
LL175-36-M	AC220-240V/AC120-277V 50/60Hz	36W	>80	70lm/W	360°	Surface Mounted	Ø600*120	Ø23.6*4.7
LL175-45-M		45W					Ø800*120	Ø31.5*4.7

Application



nelux (HK) international,ltd


RD95 CIRCUL Light Recessed




General Features

- * Avant-garde design, very good performance
- * High quality materials Aluminum + PC
- * High efficiency and energy saving
- * CCT 3000K, 4000K, 5000K
- * Optional Different dimming modes: 0-10V, Dali, Triac, RGBW
- * Emergency option
- * PF >0.9
- * Led Samsung
- * Applications: Supermarket, Hospital, Shoppin mall, Offices, museum, public building, colleges, ..

Product Photo

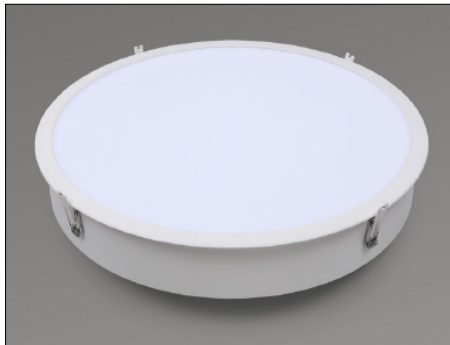

Distribution Curve

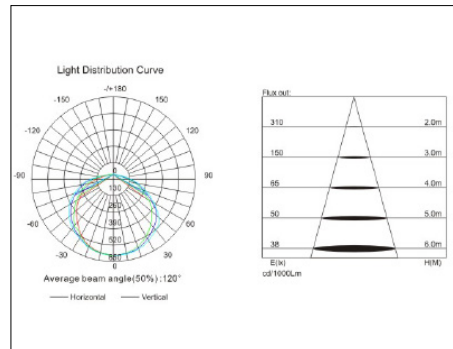

Technical Data / Datos técnicos

Model	Input Voltage	Power	-CRI	Lumens/W	Beam Angle	Installation	Size(mm) W*H*L	Size(Inch) W*H*L
RD51095		25W					Ø510*95	Ø20.1*3.7
RD63095	AC220-240V/AC120-277V 50/60Hz	40W	>80 or >90	85lm/W	120°	Recessed	Ø630*95	Ø24.8.1*3.7
RD93095		90W						
RD123095		150W						

Application



nelux (HK) international,ltd



Circular Light Profiles


Suspended Circular Light
Circular Surface Mounted Light

CIRCULAR LIGHT PROFILES II

CATALOG 2022

NELUX ARCHITECTURAL LIGHTING PRODUCTS

MODEL# EIXIR LL118 SUSPENDED



General Features

- * Avant-garde design, very good performance
- * High quality materials: Aluminum + PC
- * High efficiency and energy saving
- * CCT 3000K, 4000K, 5000K
- * Optional Different dimming modes: 0-10V, Dali, Triac, RGBW
- * Emergency option
- * PF >0.9
- * Led Samsung
- * Applications: Supermarket, Hospital, Shopping mall, Offices, museum, public building, colleges, ..
- * Choose the RAL you need for your project


Light Emission



Product Photo



Distribution Curve

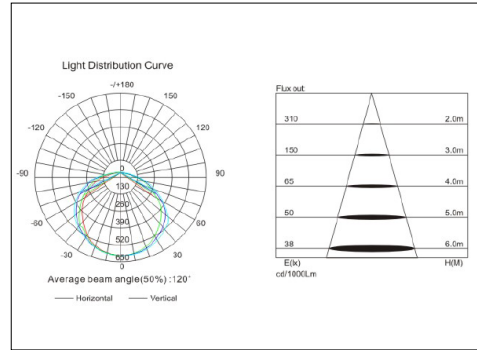

Technical Data / Datos técnicos


Model	Input Voltage	Power	-CRI	Lumens/W	Beam Angle	Installation	Size(mm) W*H*L	Size(Inch) W*H*L
LL118-40		40W					Ø600*140	Ø23.6*5.5
LL118-90	AC220-240V/AC120-277V 50/60Hz	90W	>80 or >90	85lm/W	120°	Suspended	Ø900*140	Ø35.4*5.5
LL118-180		180W					Ø1200*140	Ø47.2*5.5

Possible Applications in your office projects, hospitals, hotels, restaurants, cafeterias,...



nelux (HK) international,ltd


MODEL# EIXIR LL118 SURFACE MOUNTED



General Features

- * Avant-garde design, very good performance
- * High quality materials: Aluminum + PC
- * High efficiency and energy saving
- * CCT 3000K, 4000K, 5000K
- * Optional Different dimming modes: 0-10V, Dali, Triac, RGBW
- * Emergency option
- * PF >0.9
- * Led Samsung
- * Applications: Supermarket, Hospital, Shoppin mall, Offices, museum, public building, colleges, ..
- * Choose the RAL you need for your project


Light Emission



Product Photo



Distribution Curve

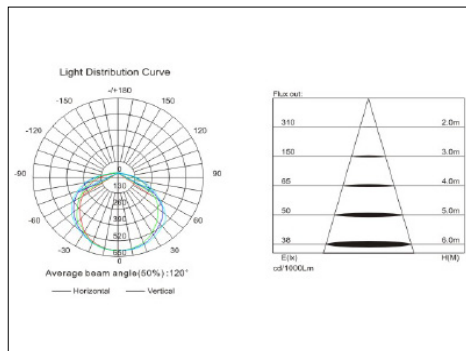

Technical Data / Datos técnicos


Model	Input Voltage	Power	-CRI	Lumens/W	Beam Angle	Installation	Size(mm) W*H*L	Size(Inch) W*H*L
LL118-40SM		40W					Ø600*175	Ø23.6*6.9
LL118-90SM	AC220-240V/AC120-277V 50/60Hz	90W	>80 or >90	85lm/W	120°	Suspended	Ø900*175	Ø35.4*6.9
LL118-180SM		180W					Ø1200*175	Ø47.2*6.9

Possible Applications in your office projects, hospitals, hotels, restaurants, cafeterias,...



nelux (HK) international,ltd

MODEL# EIXIR LL118 UP and DOWN - SUSPENDED AND SURFACE LAMP



General Features

- * Avant-garde design, very good performance
- * High quality materials: Aluminum + PC
- * High efficiency and energy saving
- * CCT 3000K, 4000K, 5000K
- * Optional Different dimming modes: 0-10V, Dali, Triac, RGBW
- * Emergency option
- * PF >0.9
- * Led Samsung
- * Applications: Supermarket, Hospital, Shoppin mall, Offices, museum, public building, colleges, ..
- * Choose the RAL you need for your project

Light Emission




Up&Down

Product Photo



Distribution Curve

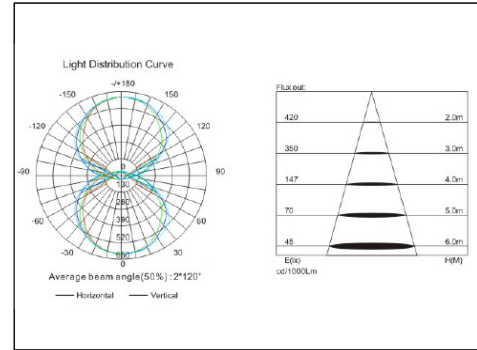


Technical Data / Datos técnicos

Model	Input Voltage	Power	-CRI	Lumens/W	Beam Angle	Installation	Size(mm) W*H*L	Size(Inch) W*H*L
LL118-UD60		60W					Ø600*140	Ø23.6*5.5
LL118-UD120	AC220-240V/AC120-277V 50/60Hz	120W	>80 or >90	85lm/W	120° * 2	Suspended	Ø900*140	Ø35.4*5.5
LL118-UD220		220W					Ø1200*140	Ø47.2*5.5

Product Photo




Distribution Curve

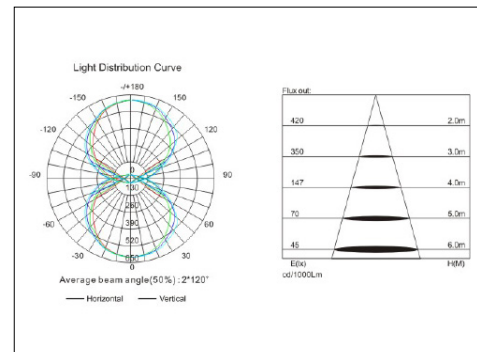

Technical Data / Datos técnicos

Model	Input Voltage	Power	-CRI	Lumens/W	Beam Angle	Installation	Size(mm) W*H*L	Size(Inch) W*H*L
LL118-UD60SM		60W					Ø600*175	Ø23.6*6.9
LL118-UD120SM	AC220-240V/AC120-277V 50/60Hz	120W	>80 or >90	85lm/W	120° * 2	Surface Mounted	Ø900*175	Ø35.4*6.9
LL118-UD220SM		220W					Ø1200*175	Ø47.2*6.9

MODEL# EIXIR LL201 - LL202 SUSPENDED LAMP - ROUND and SQUARE



General Features

- * Avant-garde design, very good performance
- * High quality materials: Aluminum + PMMA
- * High efficiency and energy saving
- * CCT 3000K, 4000K, 5000K
- * Optional Different dimming modes: 0-10V, Dali, Triac, RGBW
- * Emergency option
- * PF >0.9
- * Led Samsung
- * Applications: Supermarket, Hospital, Shopping mall, Offices, museum, public building, colleges, ..
- * Choose the RAL you need for your project

Light Emission




Product Photo



CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 70
 LED type: Samsung
 Beam angle: 160°
 Installation: Suspended
 Material: Alu+PMMA


Distribution Curve

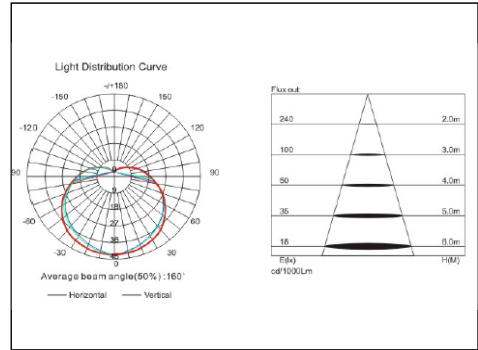

Technical Data / Datos técnicos


Model	Input Voltage	Power	-CRI	Lumens/W	Beam Angle	Installation	Size(mm) W*H*L	Size(Inch) W*H*L
LL201-12		12W					Ø300*88	Ø11.8*3.5
LL201-15		15W					Ø360*88	Ø14.2*3.5
LL201-25	AC220-240V/AC120-277V 50/60Hz	25W	>80 or >90	70lm/W	160°	Suspended	Ø450*88	Ø17.7*3.5
LL201-36		36W					Ø600*88	Ø23.6*3.5
LL201-50		50W					Ø800*88	Ø31.5*3.5

Product Photo

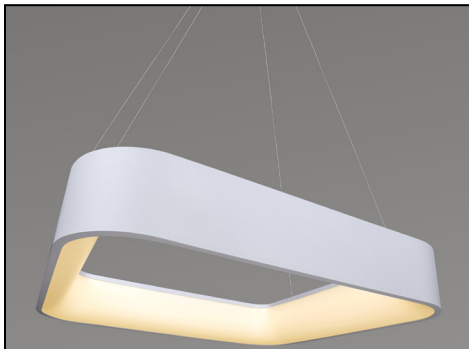

CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 70
 LED type: Samsung
 Beam angle: 160°
 Installation: Suspended
 Material: Alu+PMMA


Distribution Curve

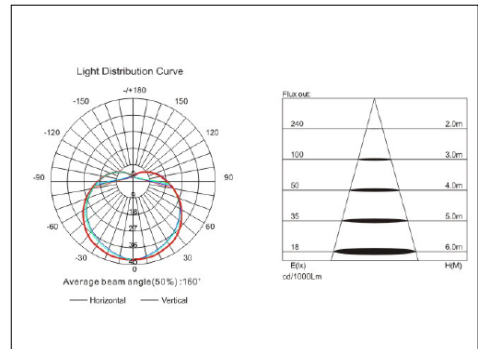

Technical Data / Datos técnicos

Model	Input Voltage	Power	-CRI	Lumens/W	Beam Angle	Installation	Size(mm) W*H*L	Size(Inch) W*H*L
LL202-15		15W					360*360*88	14.2*14.2*3.5
LL202-25		25W					450*450*88	17.7*17.7*3.5
LL202-36	AC220-240V/AC120-277V 50/60Hz	36W	>80 or >90	70lm/W	160°	Suspended	600*600*88	23.6*23.6*3.5
LL202-50		50W					800*800*88	31.5*31.5*3.5

MODEL# EIXIR LL201 - LL202 SURFACE MOUNTED - ROUND and SQUARE



General Features

- * Avant-garde design, very good performance
- * High quality materials: Aluminum + PMMA
- * High efficiency and energy saving
- * CCT 3000K, 4000K, 5000K
- * Optional Different dimming modes: 0-10V, Dali, Triac, RGBW
- * Emergency option
- * PF >0.9
- * Led Samsung
- * Applications: Supermarket, Hospital, Shopping mall, Offices, museum, public building, colleges, ..
- * Choose the RAL you need for your project


Light Emission



Product Photo




Distribution Curve

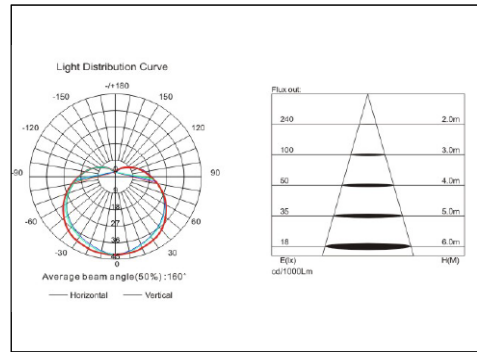


Technical Data / Datos técnicos

Model	Input Voltage	Power	-CRI	Lumens/W	Beam Angle	Installation	Size(mm) W*H*L	Size(Inch) W*H*L
LL201-12SM		12W					Ø300*116	Ø11.8*4.6
LL201-15SM		15W					Ø360*116	Ø14.2*4.6
LL201-25SM	AC220-240V/AC120-277V 50/60Hz	25W	>80 or >90	70lm/W	160°	Surface Mounted	Ø450*116	Ø17.7*4.6
LL201-36SM		36W					Ø600*116	Ø23.6*4.6
LL201-50SM		50W					Ø800*116	Ø31.5*4.6

Product Photo

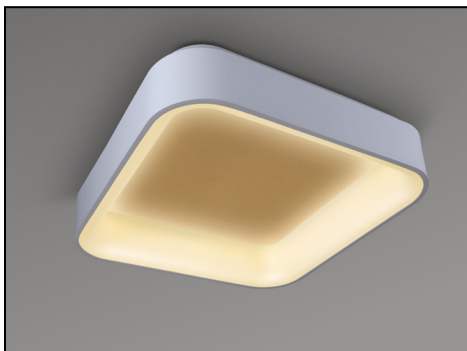


Distribution Curve

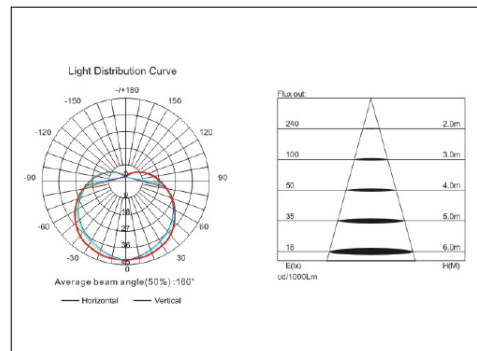

Technical Data / Datos técnicos

Model	Input Voltage	Power	-CRI	Lumens/W	Beam Angle	Installation	Size(mm) W*H*L	Size(Inch) W*H*L
LL202-15SM		15W					360*360*116	14.2*14.2*4.6
LL202-25SM	AC220-240V/AC120-277V 50/60Hz	25W	>80 or >90	70lm/W	160°	Surface Mounted	450*450*116	17.7*17.7*4.6
LL202-36SM		36W					600*600*116	23.6*23.6*4.6
LL202-50SM		50W					800*800*116	31.5*31.5*4.6

MODEL# EIXIR LL114 SUSPENDED and SURFACE MOUNTED



General Features

- * Avant-garde design, very good performance
- * High quality materials: Aluminum + PMMA
- * High efficiency and energy saving
- * CCT 3000K, 4000K, 5000K
- * Optional Different dimming modes: 0-10V, Dali, Triac, RGBW
- * Emergency option
- * PF >0.9
- * Led Samsung
- * Applications: Supermarket, Hospital, Shopping mall, Offices, museum, public building, colleges, ..
- * Choose the RAL you need for your project


Light Emission



Product Photo



Distribution Curve

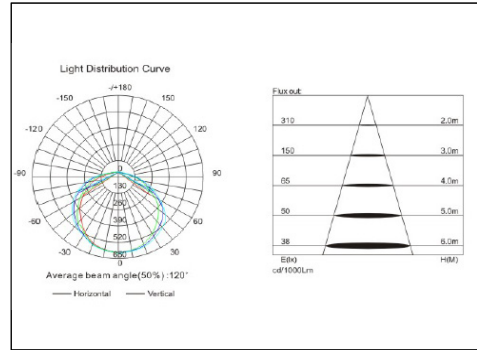


Technical Data / Datos técnicos

Model	Input Voltage	Power	-CRI	Lumens/W	Beam Angle	Installation	Size(mm) W*H*L	Size(Inch) W*H*L
LL114-15		15W					Ø300*24	Ø11.8*0.9
LL114-20		20W					Ø400*24	Ø15.7*0.9
LL114-30	AC220-240V/AC120-277V 50/60Hz	30W	>80 or >90	80lm/W	120°	Surface Mounted	Ø500*24	Ø19.7*0.9
LL114-40		40W					Ø600*24	Ø23.6*0.9
LL114-90		90W					Ø900*24	Ø35.4*0.9

Product Photo



Distribution Curve

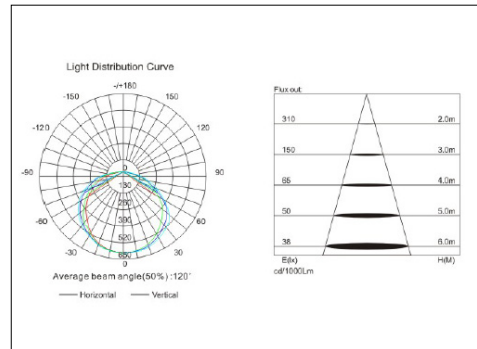

Technical Data / Datos técnicos

Model	Input Voltage	Power	-CRI	Lumens/W	Beam Angle	Installation	Size(mm) W*H*L	Size(Inch) W*H*L
LL114-15SM		15W					Ø300*55	Ø11.8*2.2
LL114-20SM		20W					Ø400*55	Ø15.7*2.2
LL114-30SM	AC220-240V/AC120-277V 50/60Hz	30W	>80 or >90	70lm/W	160°	Surface Mounted	Ø500*55	Ø19.7*2.2
LL114-40SM		40W					Ø600*55	Ø23.6*2.2

THANK YOU

CONTACT US

whatsapp +852 5349 0724

email sales@nelux.com.hk

wechat neluxury

Head Office

18 Harbour Road, Central Plaza , 32/F, offices 3208,
Wanchai, Hong Kong, China

Assembling Workshop

22 Kin Fat St. 11th Floor, Sun Hing Industrial Building,
Tuen Mun, Hong Kong, China