

nelux
PRODUCING YOUR DREAMS

2024-2025

Nelux Architectural Lighting Products
Whatsapp: +852 5349 0724
sales@nelux.com.hk
www.nelux.com.hk

Head office: China, HK, Wanchai,
Central Plaza, 18 Harbour road, 32/F, Office 3208
Workhouse: China, HK, Tuen Mun, Sun Hing Industrial Building, 22 Kin Fat Street, 11th Floor

Tel:+852 28600042
Fax:+852 28600066
WeChat: neluxury

NELUX ARCHITECTURAL LIGHTING - MAGNETIC SYSTEM K05 2024-2025

nelux
Producing your dreams

DC24V MAGNETIC SYSTEM K05

5mm

ARCHITECTURAL & COMMERCIAL LIGHTING

nelux
Producing your dreams

nelux
PRODUCING YOUR DREAMS

Do you need Bespoke Lighting?
¿Necesita productos a medida?

NELUX BESPOKE LIGHT NELUX
PRODUCTOS A MEDIDA

SMART

MODERN

FORM

+

LONG

LIFESPAN

+

LIGHTING

SOLUTIONS

ABOUT US

14 years ago a group of us bonded together with the bright idea to bring unique design and top quality led lighting system to market. All for architectural and commercial lighting products reflect the core of modularity, convenience and affordability.

Nelux a tech-style luminaire firm that focuses on innovation. These innovation based on our deep cooperation with lighting designers, we know what you need, we know how to bring a better lighting in your space.

Working with us comes with some awesome perks

INNOVATIVE TECHNOLOGY:

With years deep communication with designers, We continuously strive to bring the latest lighting components and technological innovations to LED lighting products

COMPREHENSIVE DATASHEET SUPPORT:

In Nelux, we always think about how to help our customers finish their work, see what we can do for you, Lighting design, IES Files, High resolution photos, You just sent us DWG file, we will work for you with a experience team

CUSTOMIZATION:

With a wide variety of marketing content from catalogue choose, if customers still need a special or unique design for lighting, our global sales team will work with you to user in a customization lighting solution for your customers.

A modern office interior featuring a curved ceiling with a grid of metal tracks and recessed linear lighting fixtures. The office is furnished with desks, computers, and ergonomic chairs. Large windows on the left side provide natural light and a view of the outdoors. The overall aesthetic is clean, professional, and contemporary.

CONTENTS

About NELUX

MAGNET TRACK SYSTEM K05

.....
NELUX ALREADY FINISHED
MORE THAN 700 PROJECTS
WELCOME TO CONTACT US
FOR LIGHTING DESIGNS

Nelux Architectural Lighting Products

INNOVATIVE TECHNOLOGY FOR ARCHITECTURAL LIGHTING

Mini
magnet track





Mini
magnet track

E x t r e m e l y

s l i m

d e s i g n



E x t r e m e l y

s l i m

d e s i g n





Mini magnet track



Multiple linking methods
can be used in combination

and creativity
can be created by you

KRT



KDT

KST

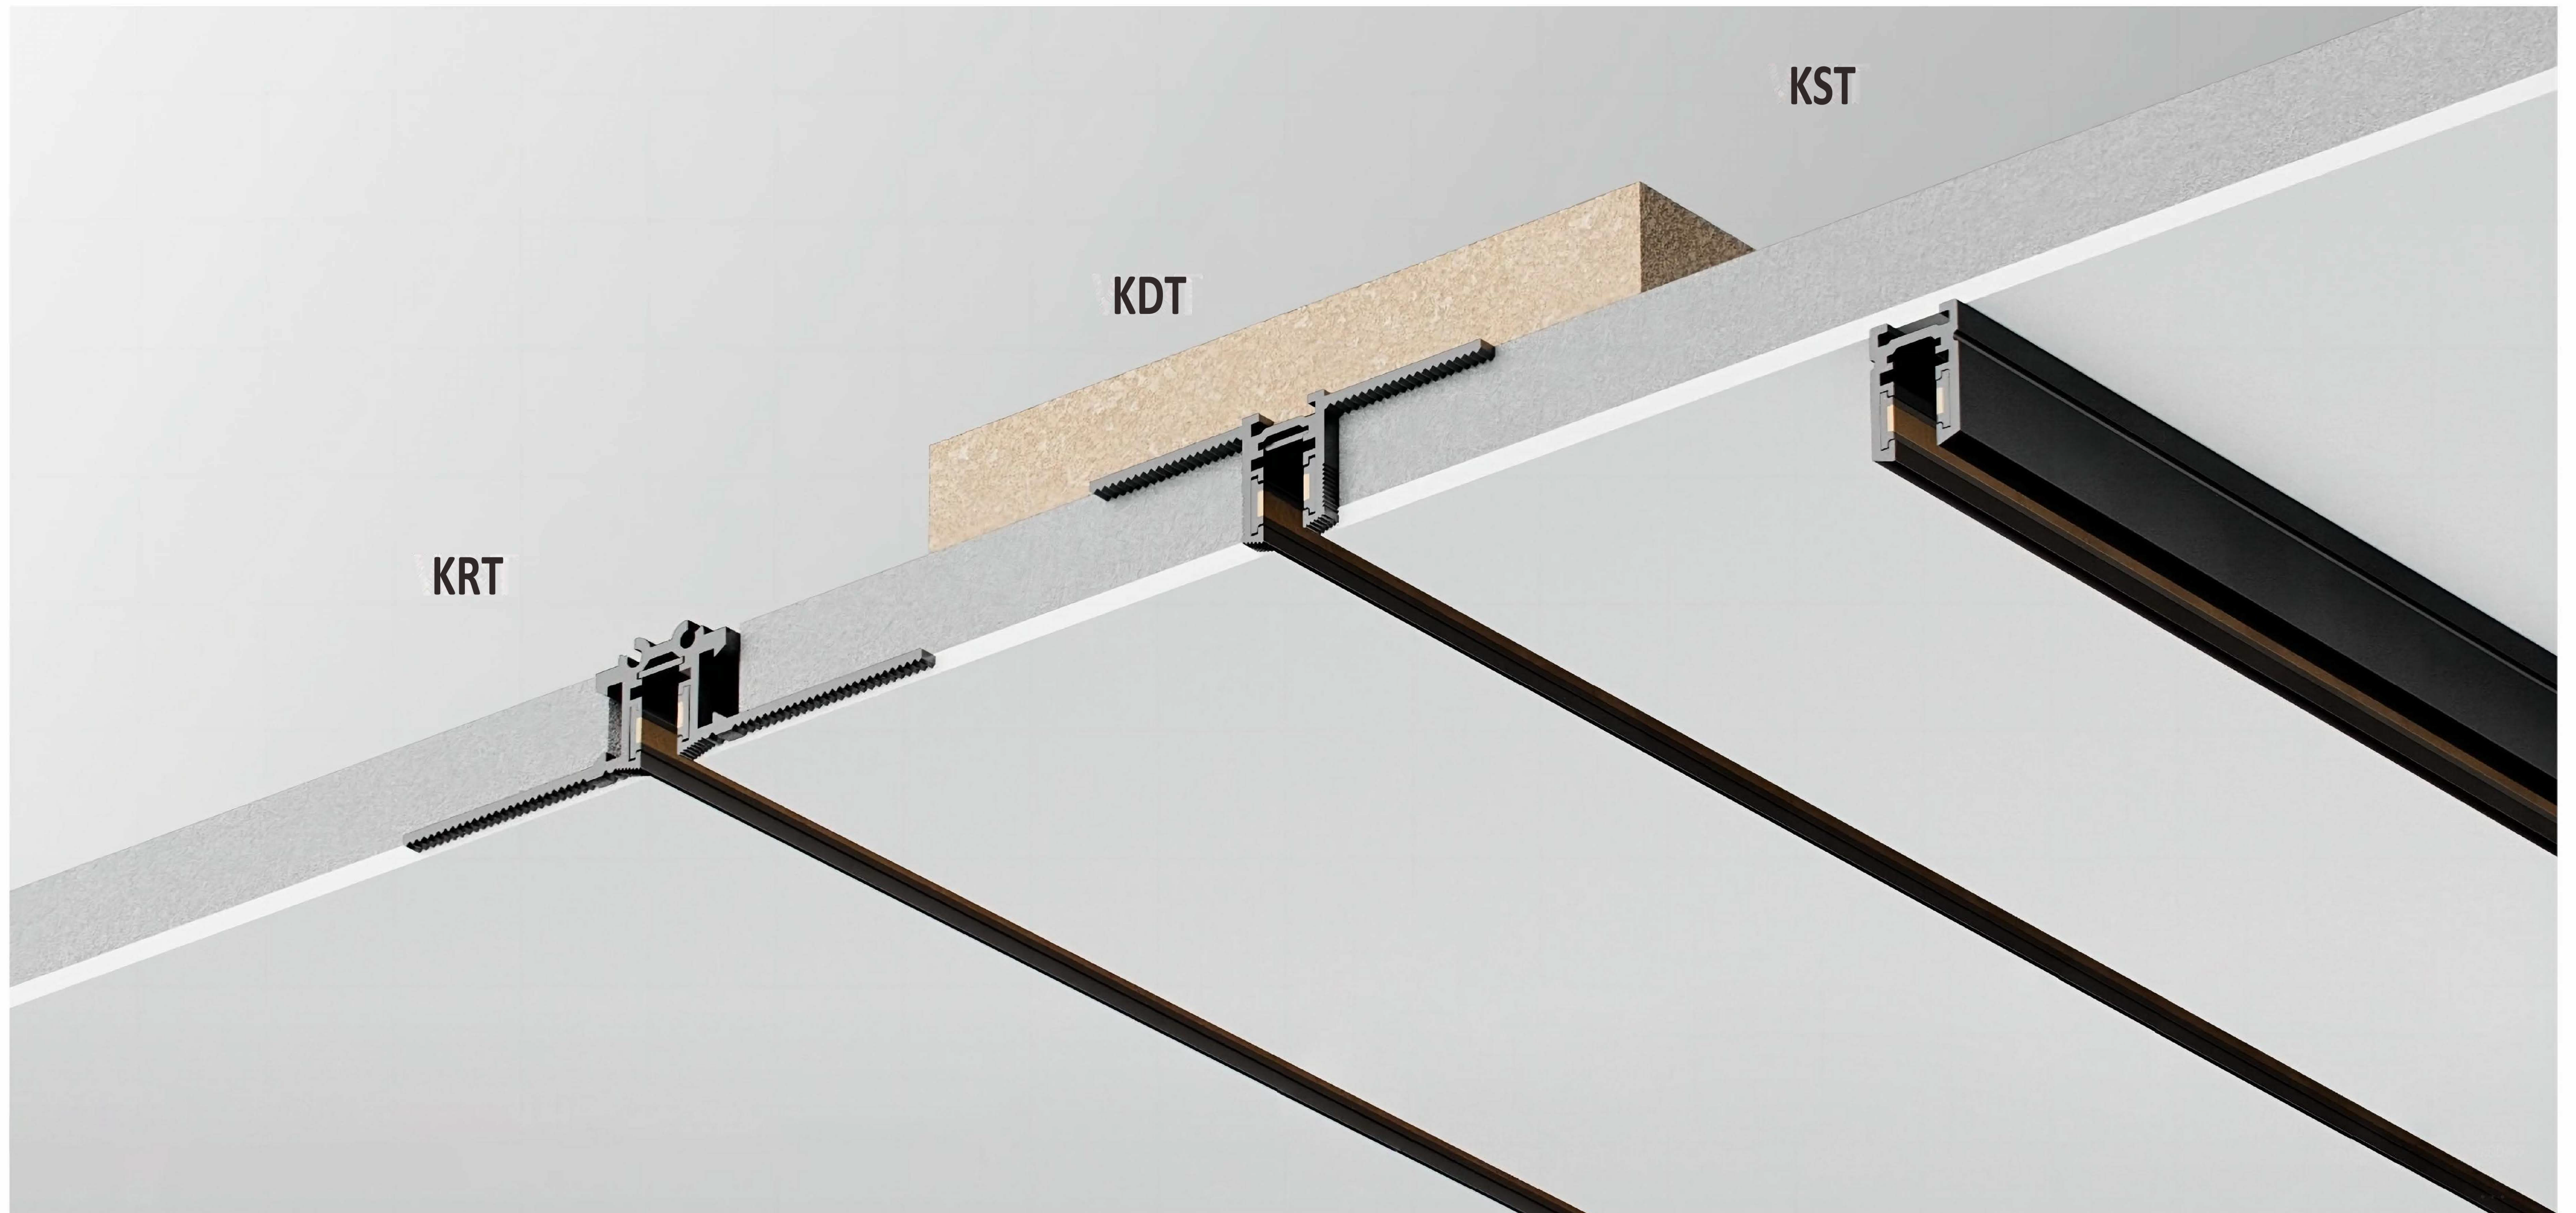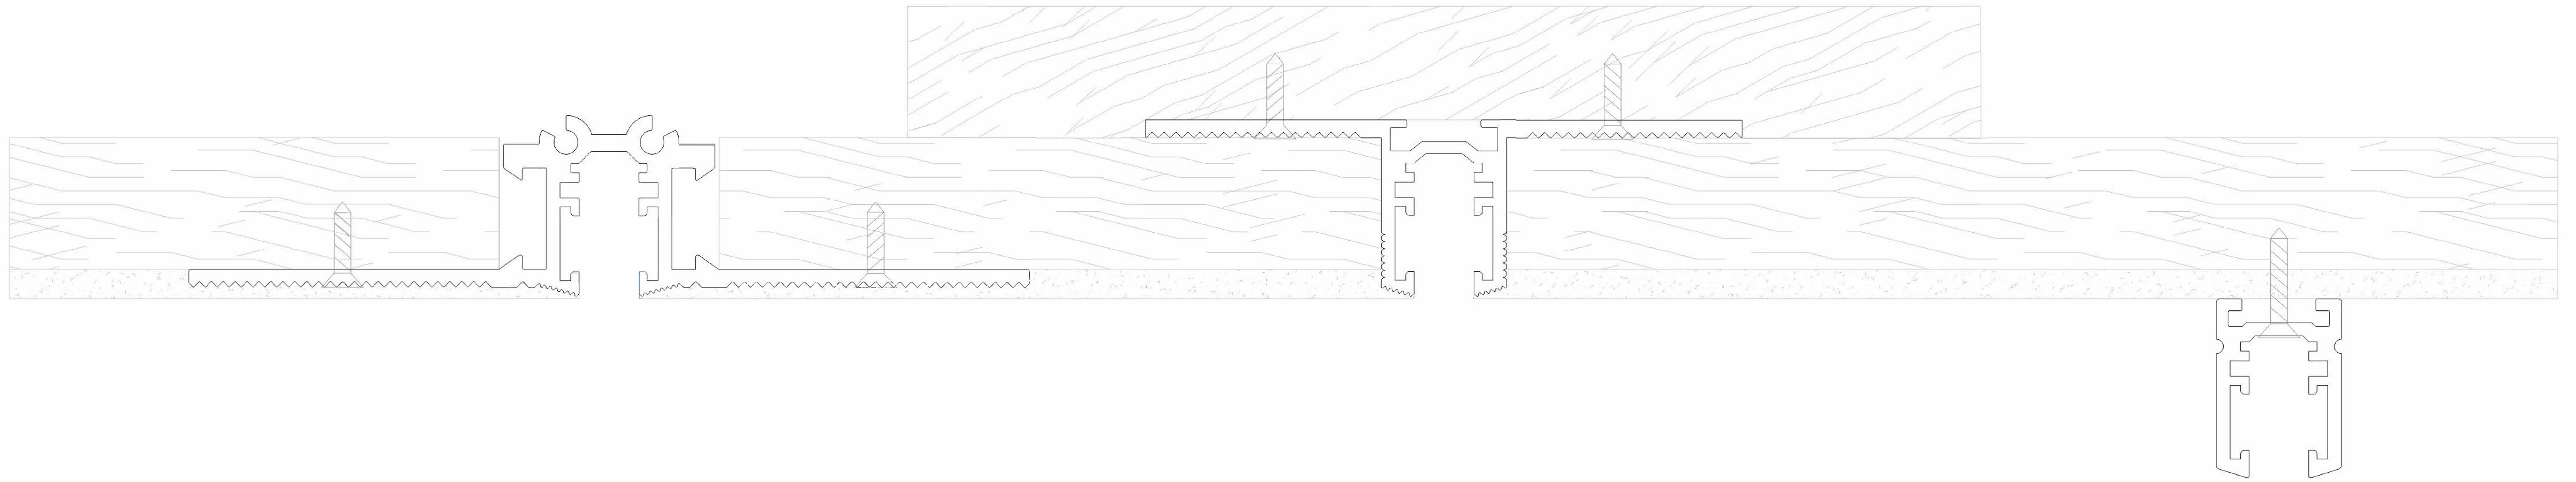


MINI MAGNET TRACK K05


KRT Track (Flush mounting)

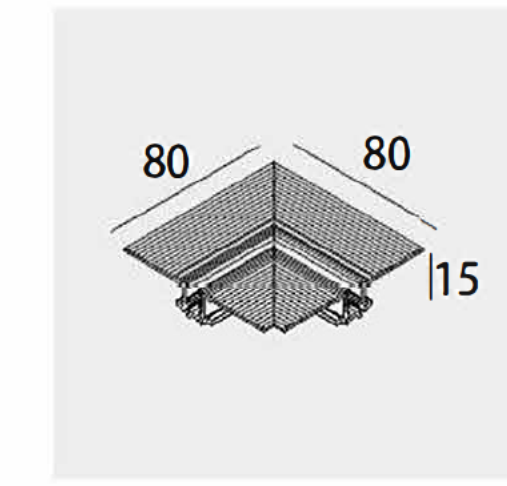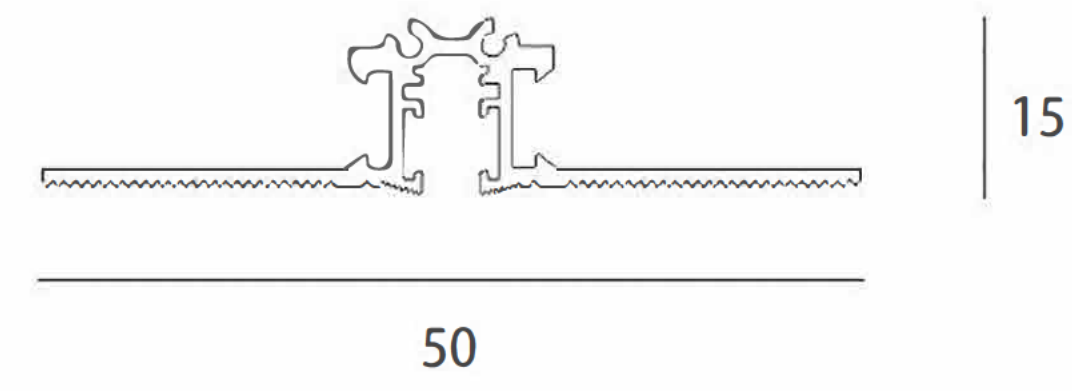


KRT-L01

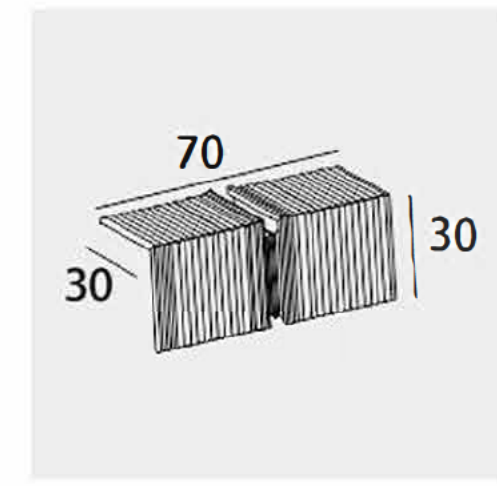


KRT-J01

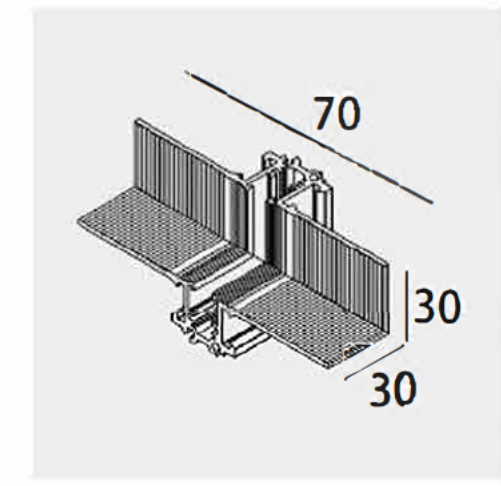


KRT-J02

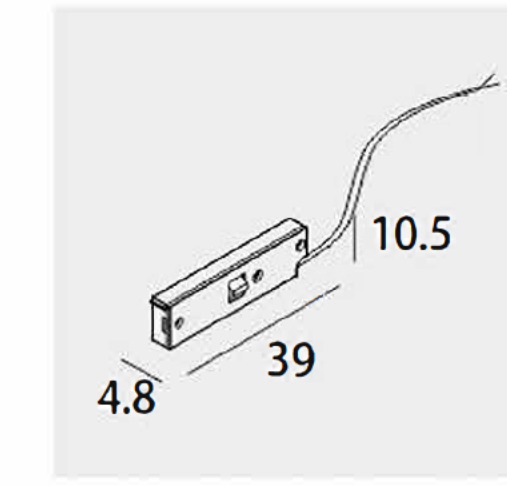


KT E01

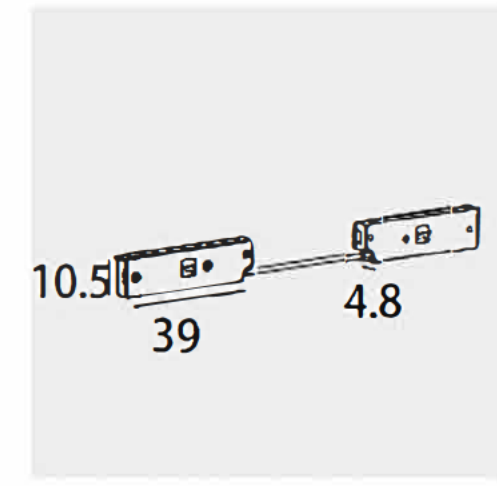


KT E02

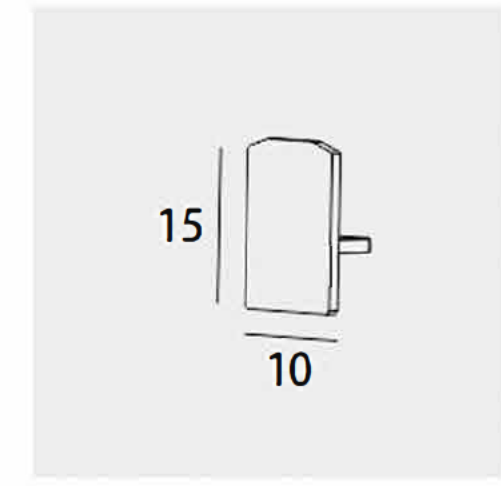


KT-END

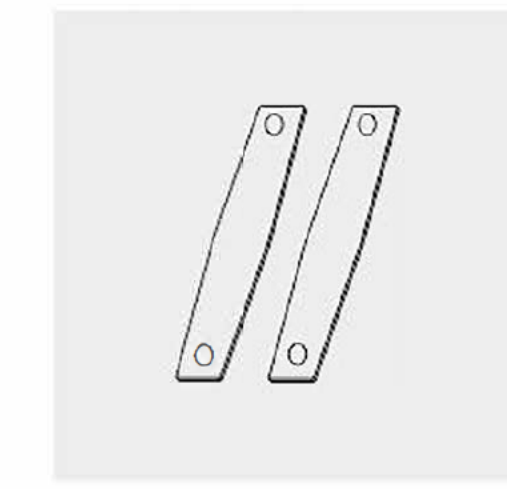

KRT C01

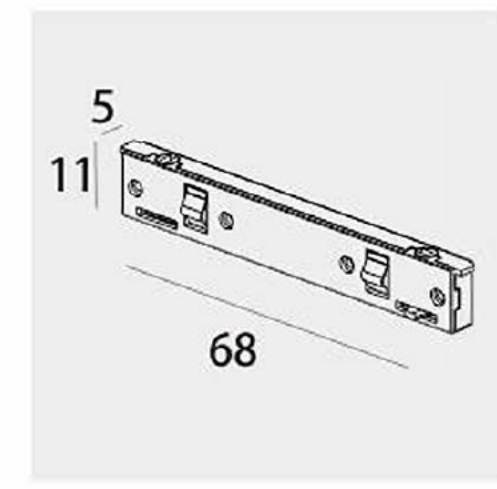



KT E04

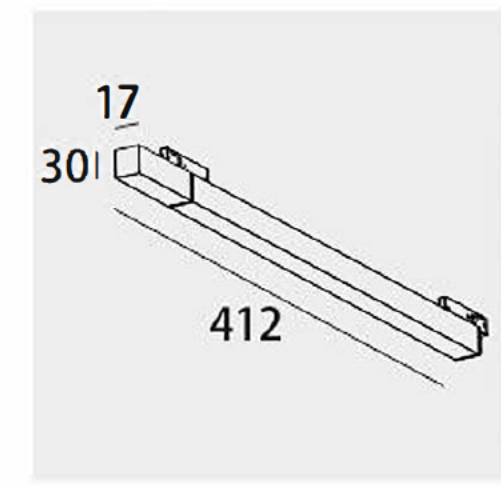


KT0524100W

Type	Electrical parameters	Maximum current	Length(mm)
KRT 0.5M	DC 24V	4A max	500
KRT 1M	DC 24V	4A max	1000
KRT-2M	DC 24V	4A max	2000
KRT 3M	DC 24V	4A max	3000

KDT Track (CLAMP PLATE)

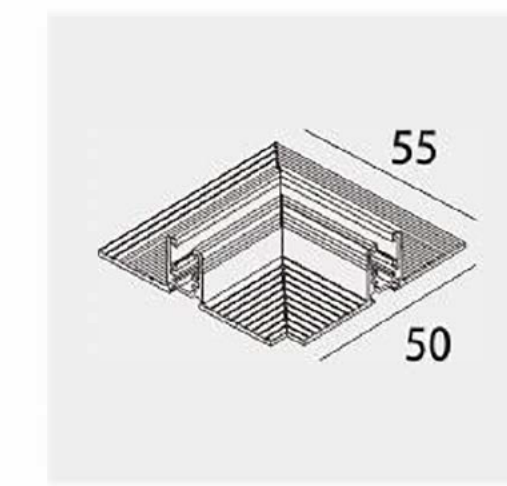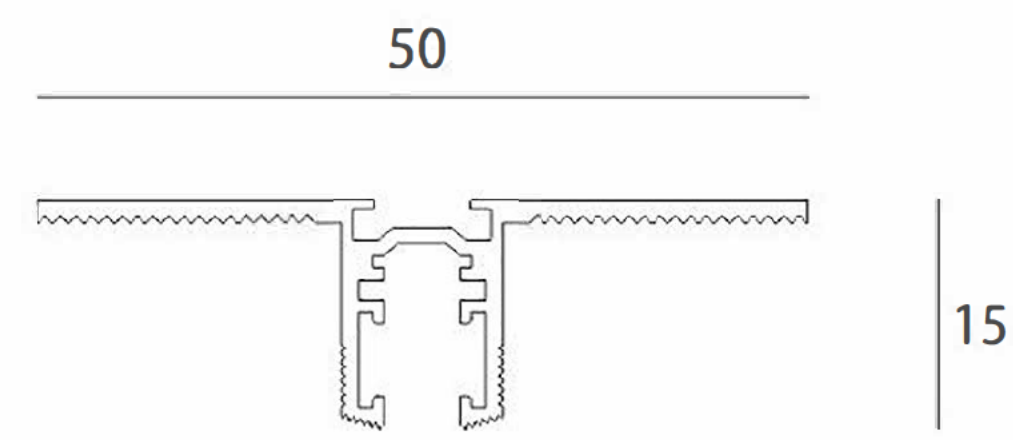

KDT L01


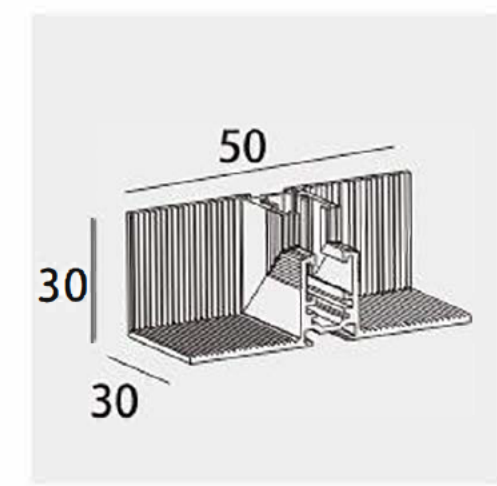


KDT J01


Type	Electrical parameters	Maximum current	Length(mm)
KDT 0.5M	DC 24V	4A max	500
KKDT 1M	DC 24V	4A max	1000
KDT-2M	DC 24V	4A max	2000
KDT 3M	DC 24V	4A max	3000

MINI MAGNET TRACK K05


KST Track (Surface mounting)

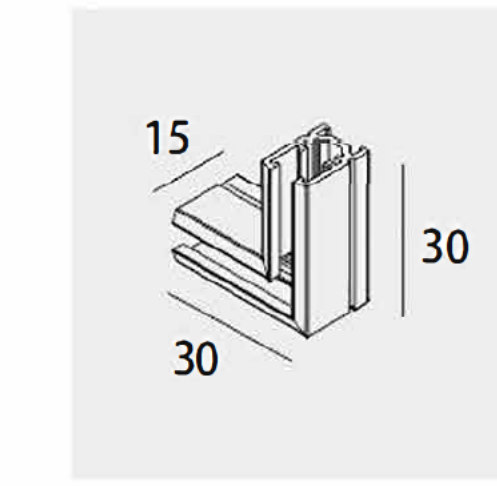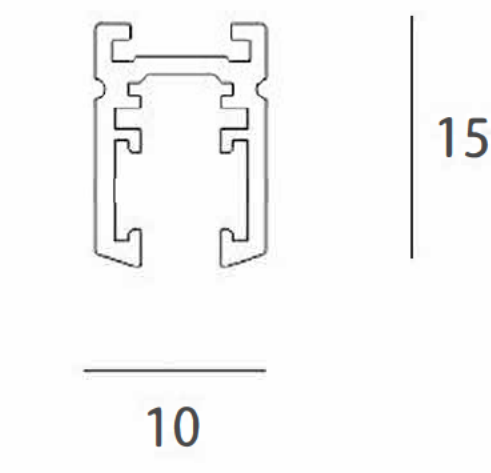

KST-L02

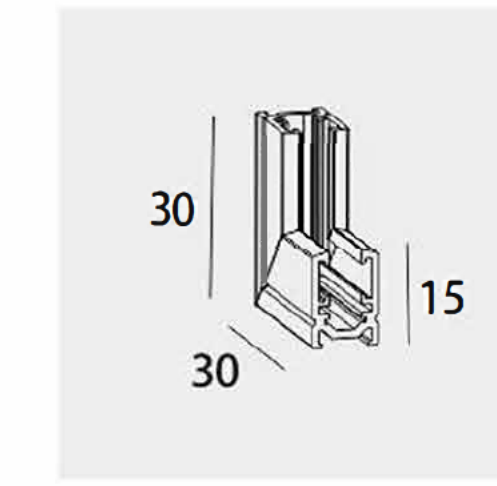


KST-J02

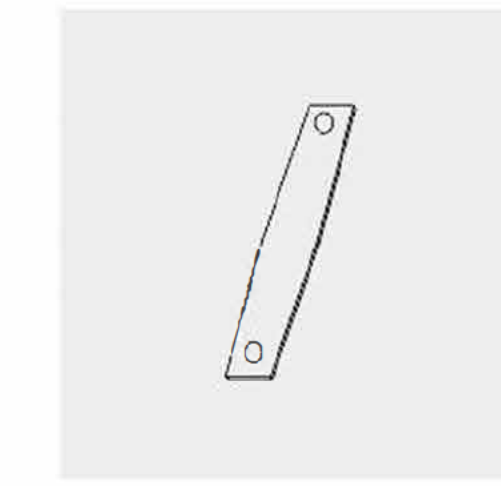


KST-C01

Type	Electrical parameters	Maximum current	Length(mm)
KST 0.5M	DC 24V	4A max	500
KST-1M	DC 24V	4A max	1000
KST-2M	DC 24V	4A max	2000
KST 3M	DC 24V	4A max	3000

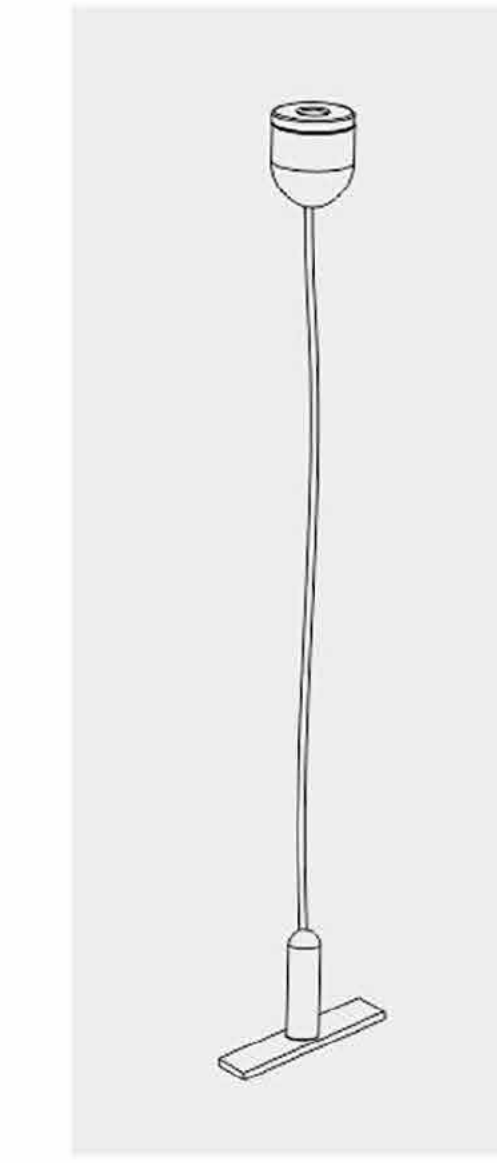


KST P01

KOT Track (Surface mounting)

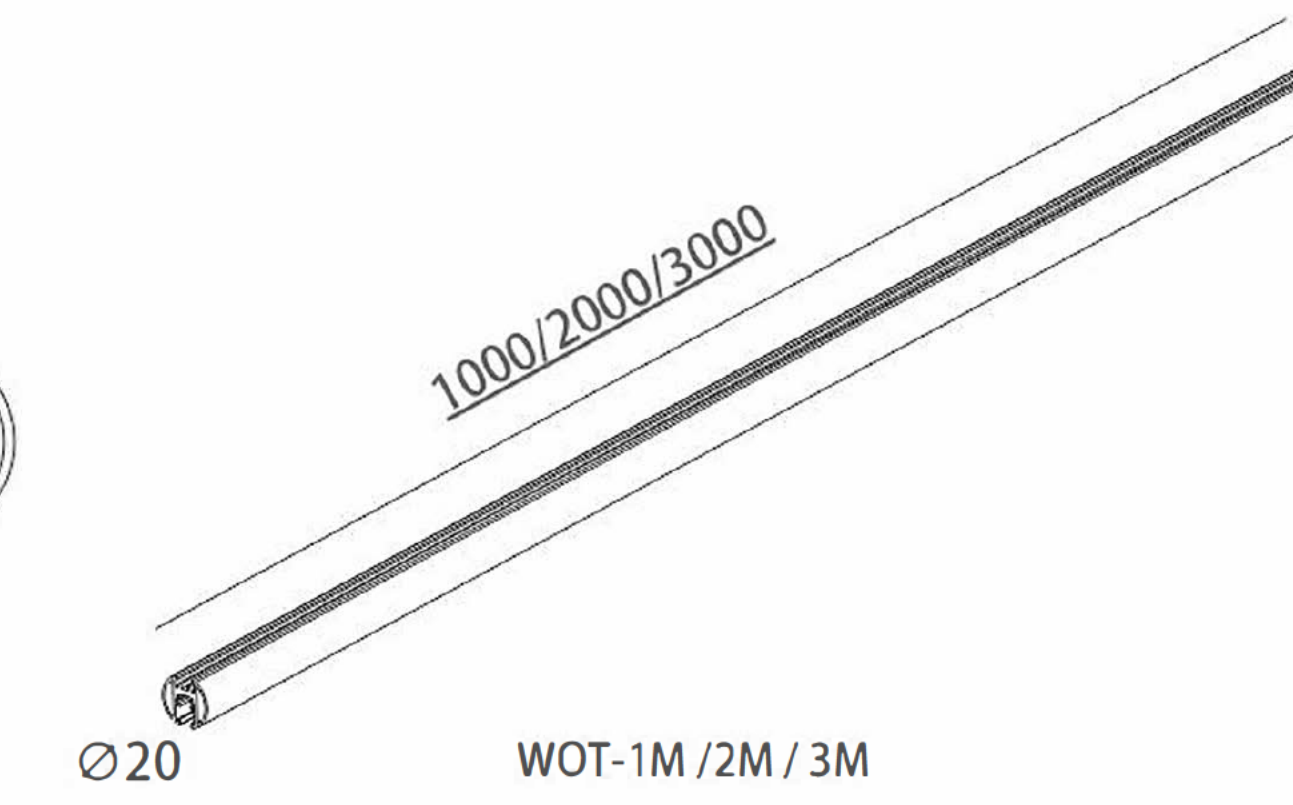


Type	Electrical parameters	Maximum current	Length(mm)
KOT 1M	DC 24V	4A max	1000
KOT-2M	DC 24V	4A max	2000
KOT-3M	DC 24V	4A max	3000

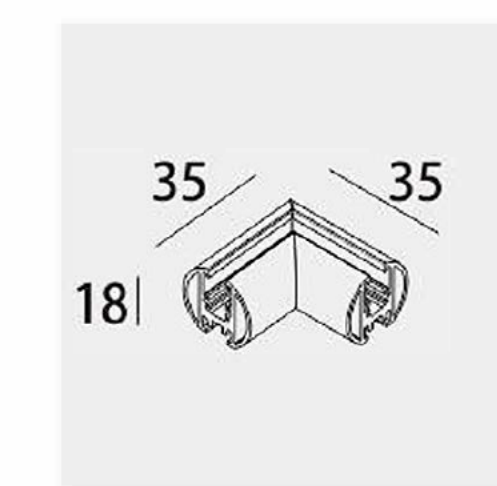


KOT L01




KOT END

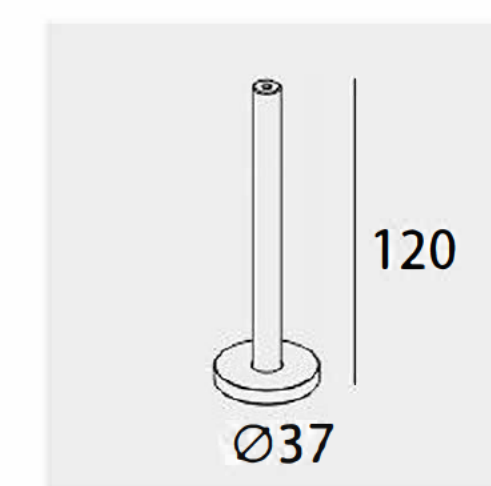


KOT B01

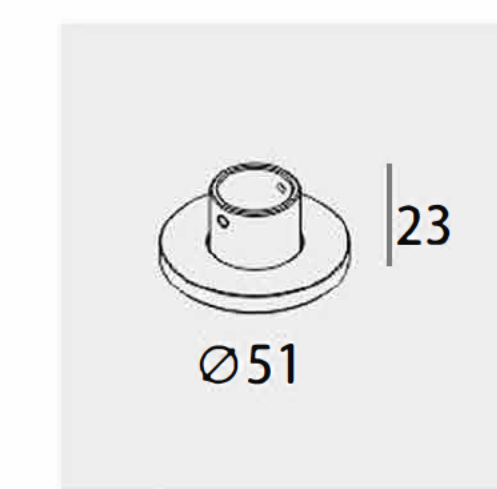


KOT B02

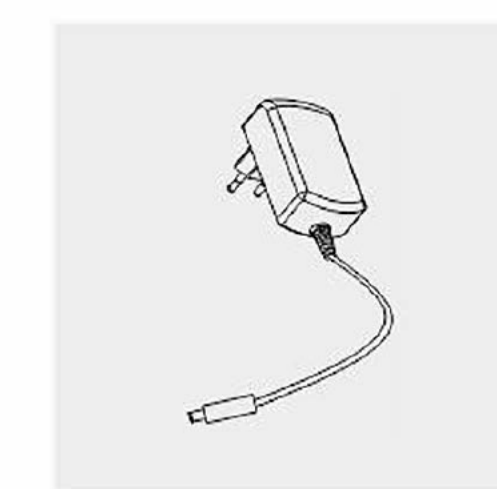



POWER ADAPTER

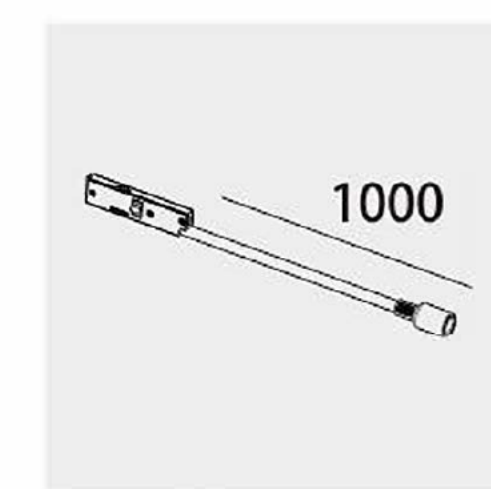

KOT E01

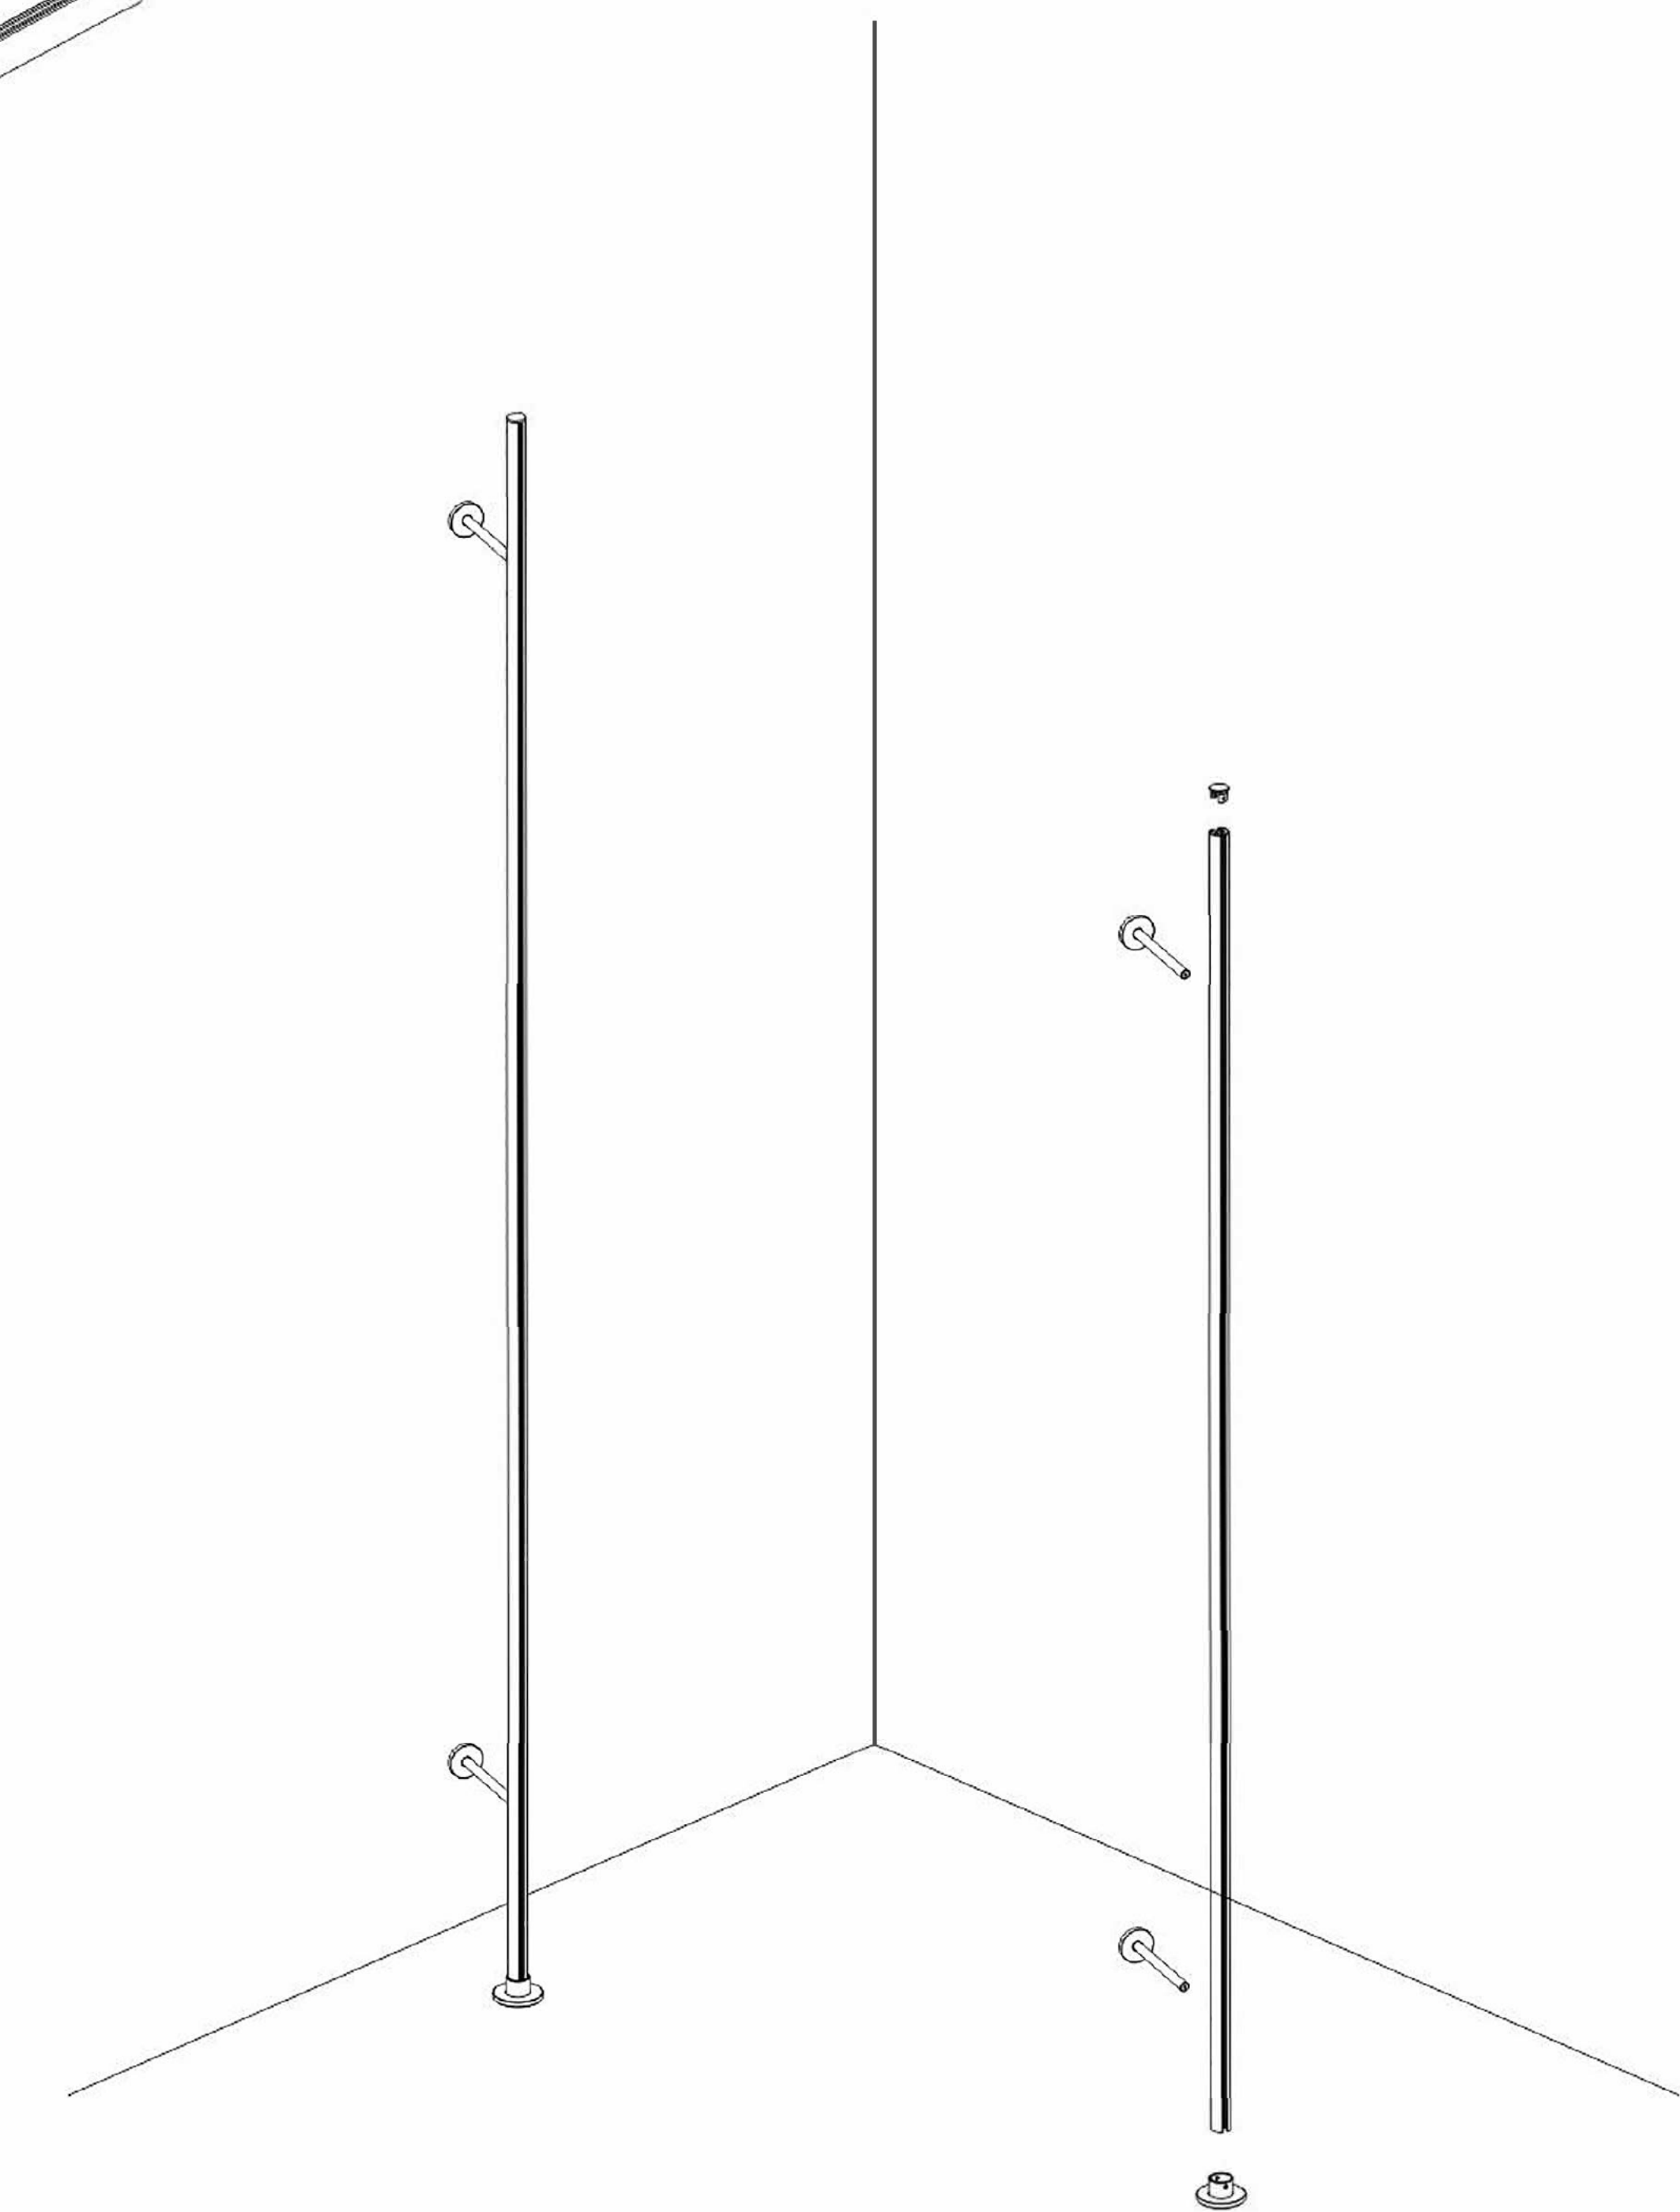


KDT Track (CLAMP PLATE)

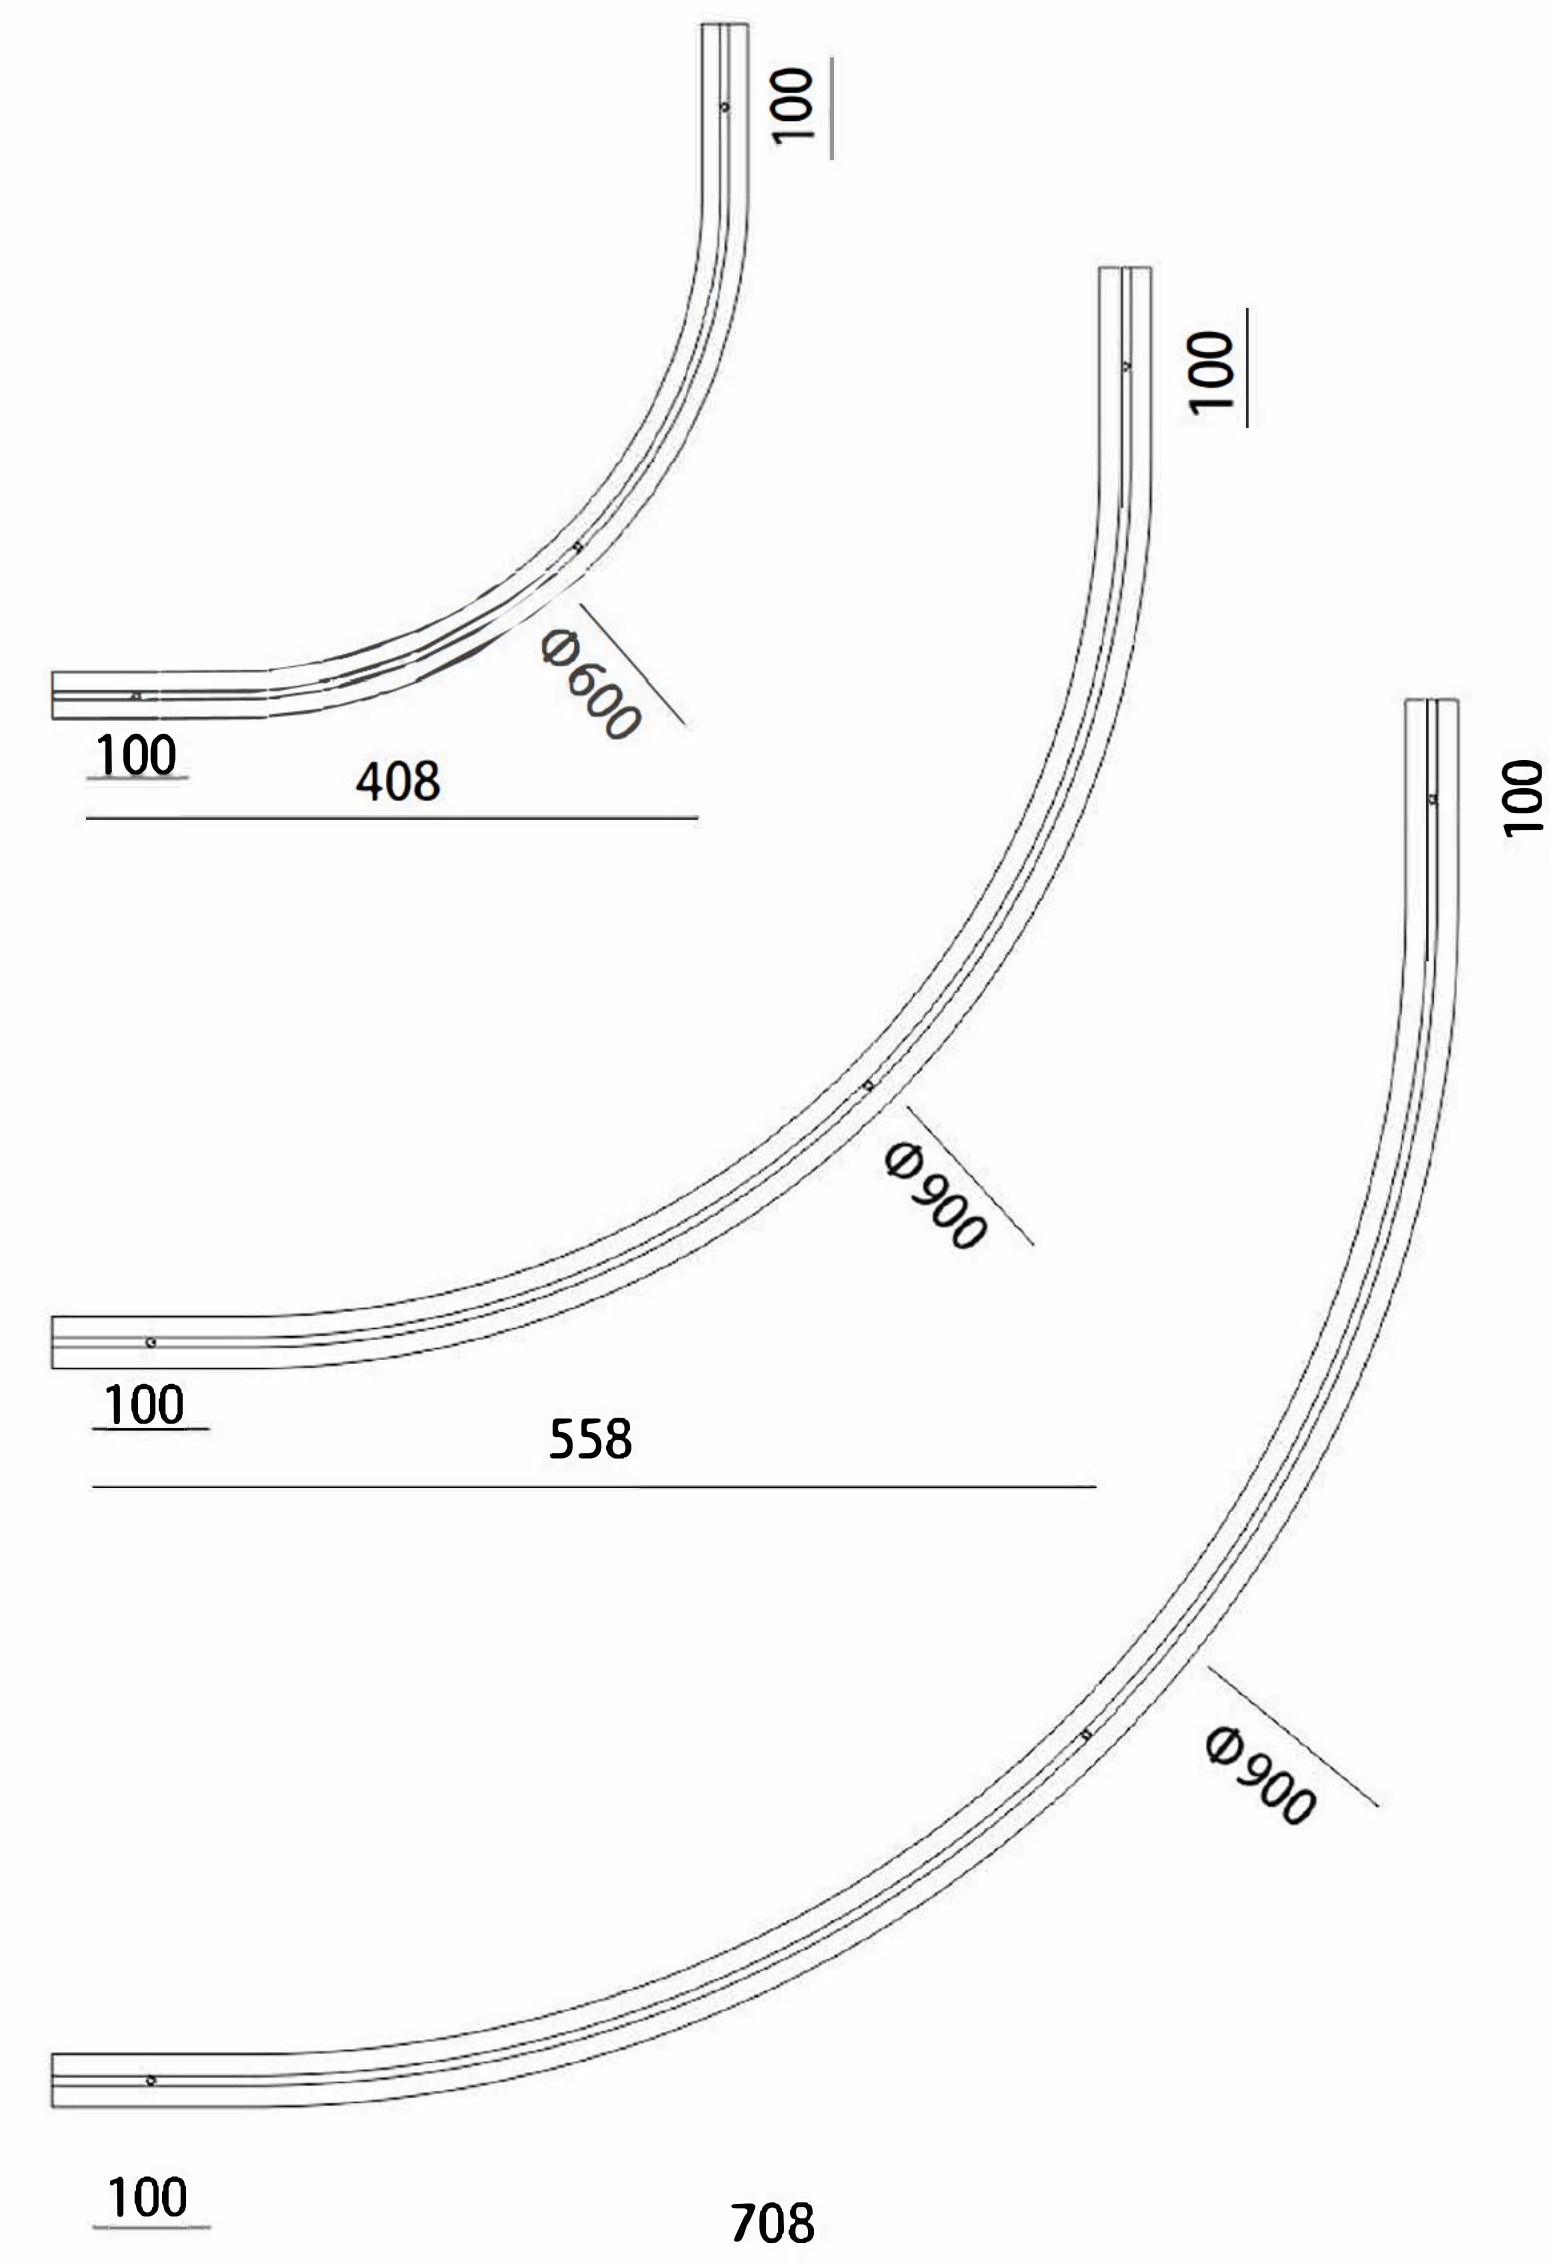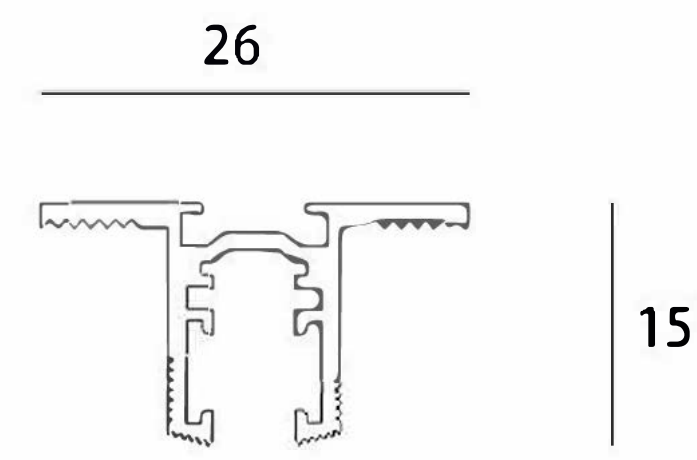

Type	Electrical parameters	Maximum current	Length(mm)
KDT R600Q	DC 24V	4A max	Φ 600
KDT R900Q	DC 24V	4A max	Φ 900
KDT-R1200Q	DC 24V	4A max	Φ 1200





KOT Track (Surface mounting)

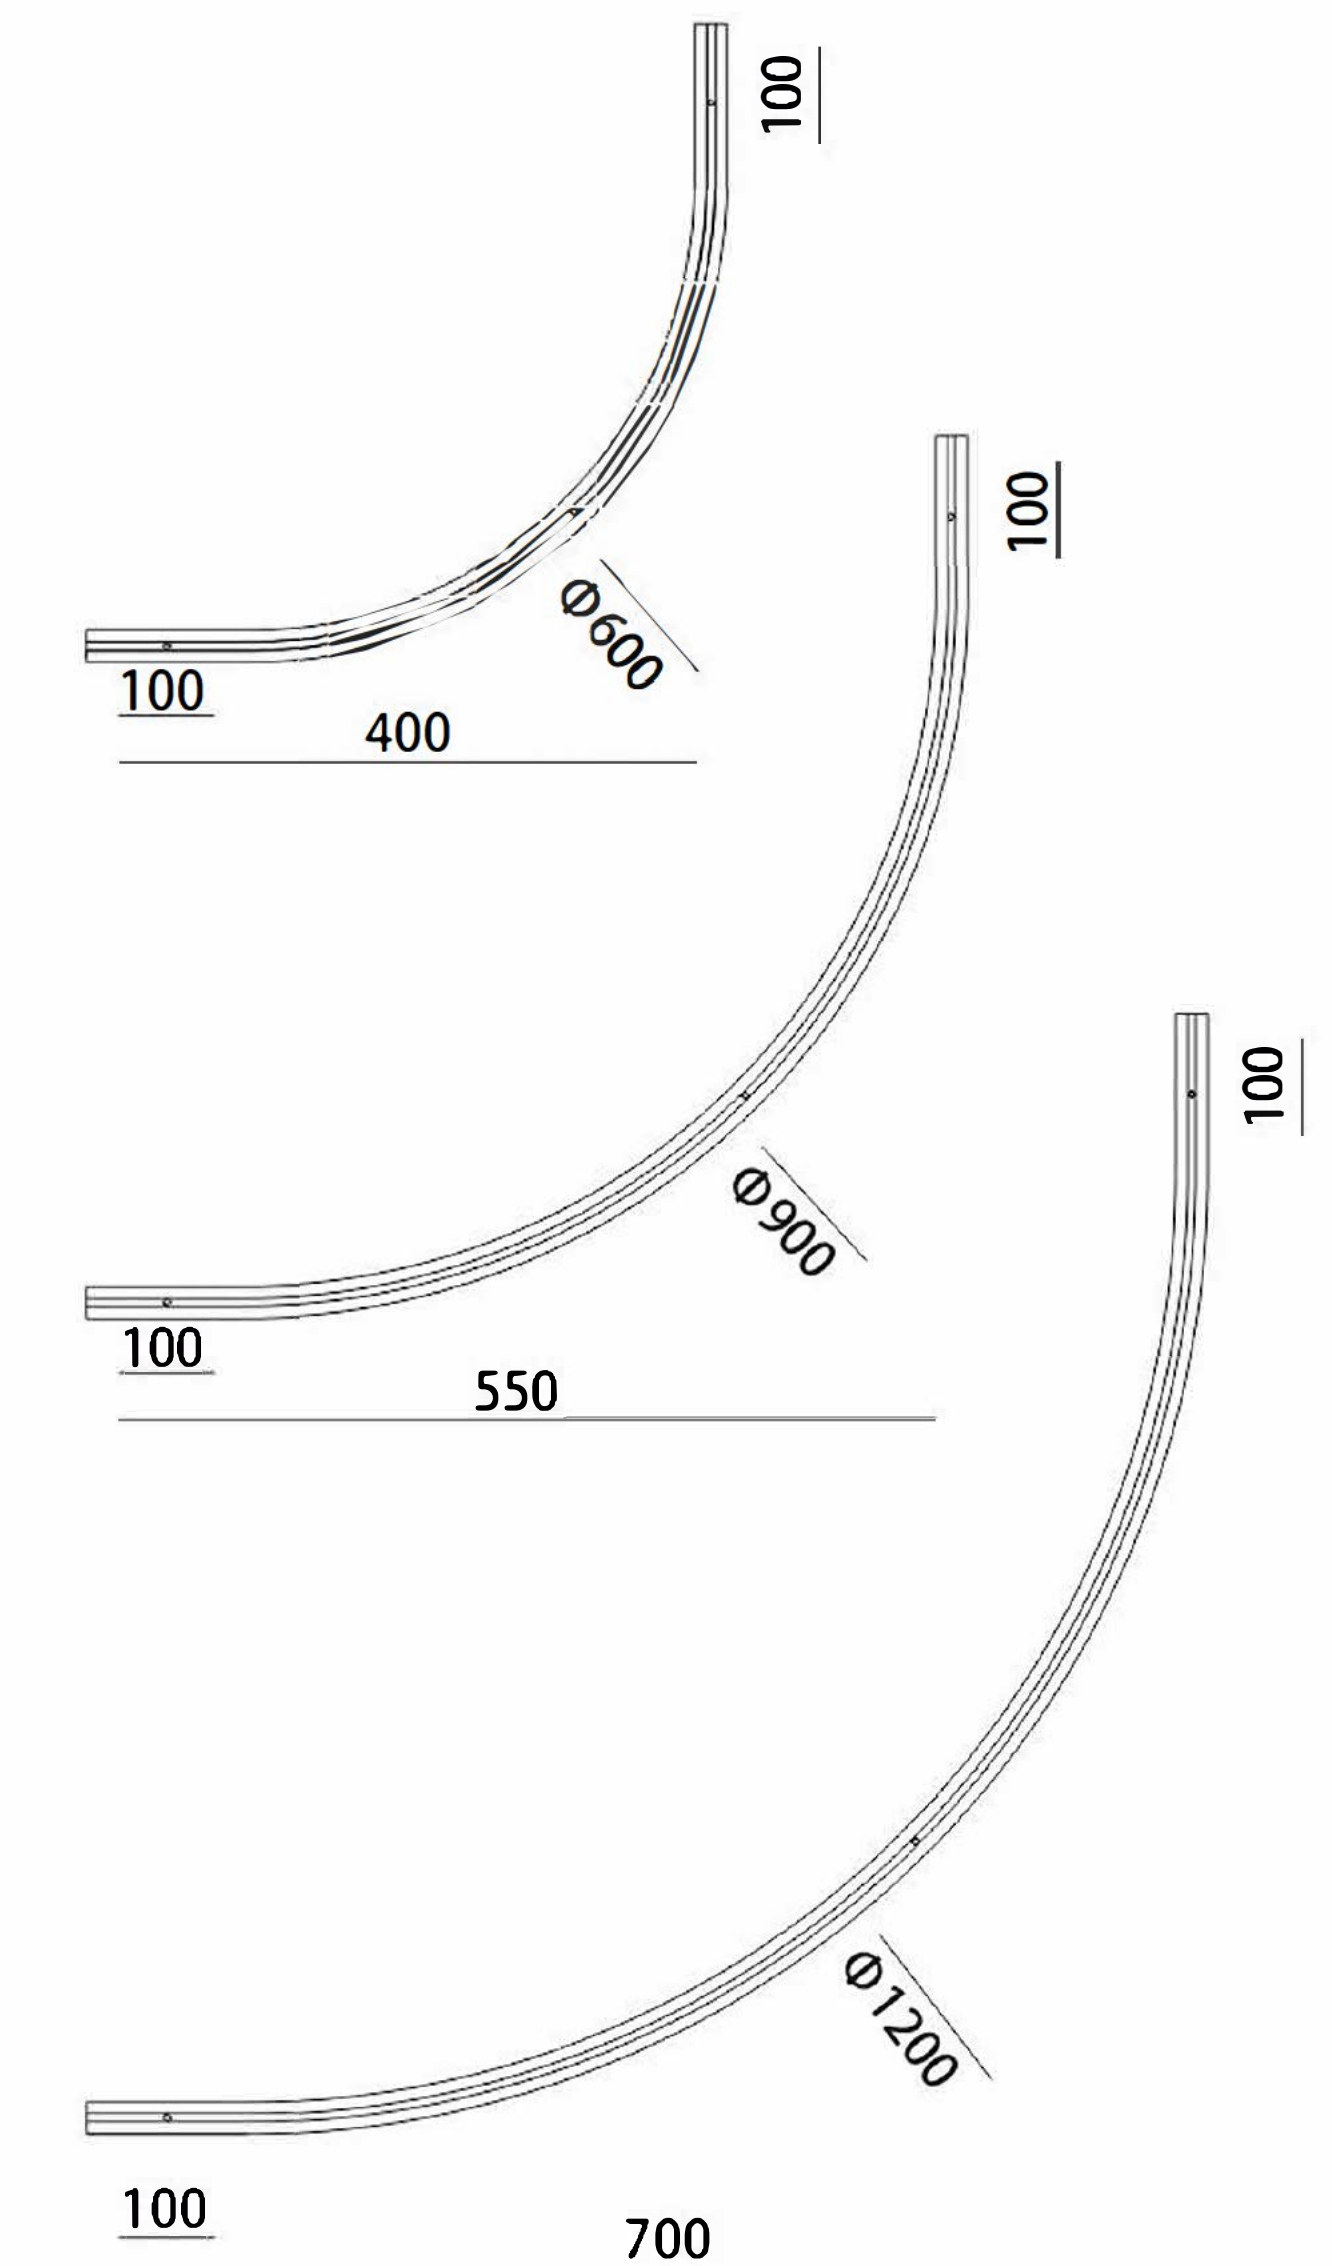

Type	Electrical parameters	Maximum current	Length(mm)
KOT R600Q	DC 24V	4A max	Φ 600
KOT R900Q	DC 24V	4A max	Φ 900
KOT-R1200Q	DC 24V	4A max	Φ 1200



KST Track (Surface mounting)

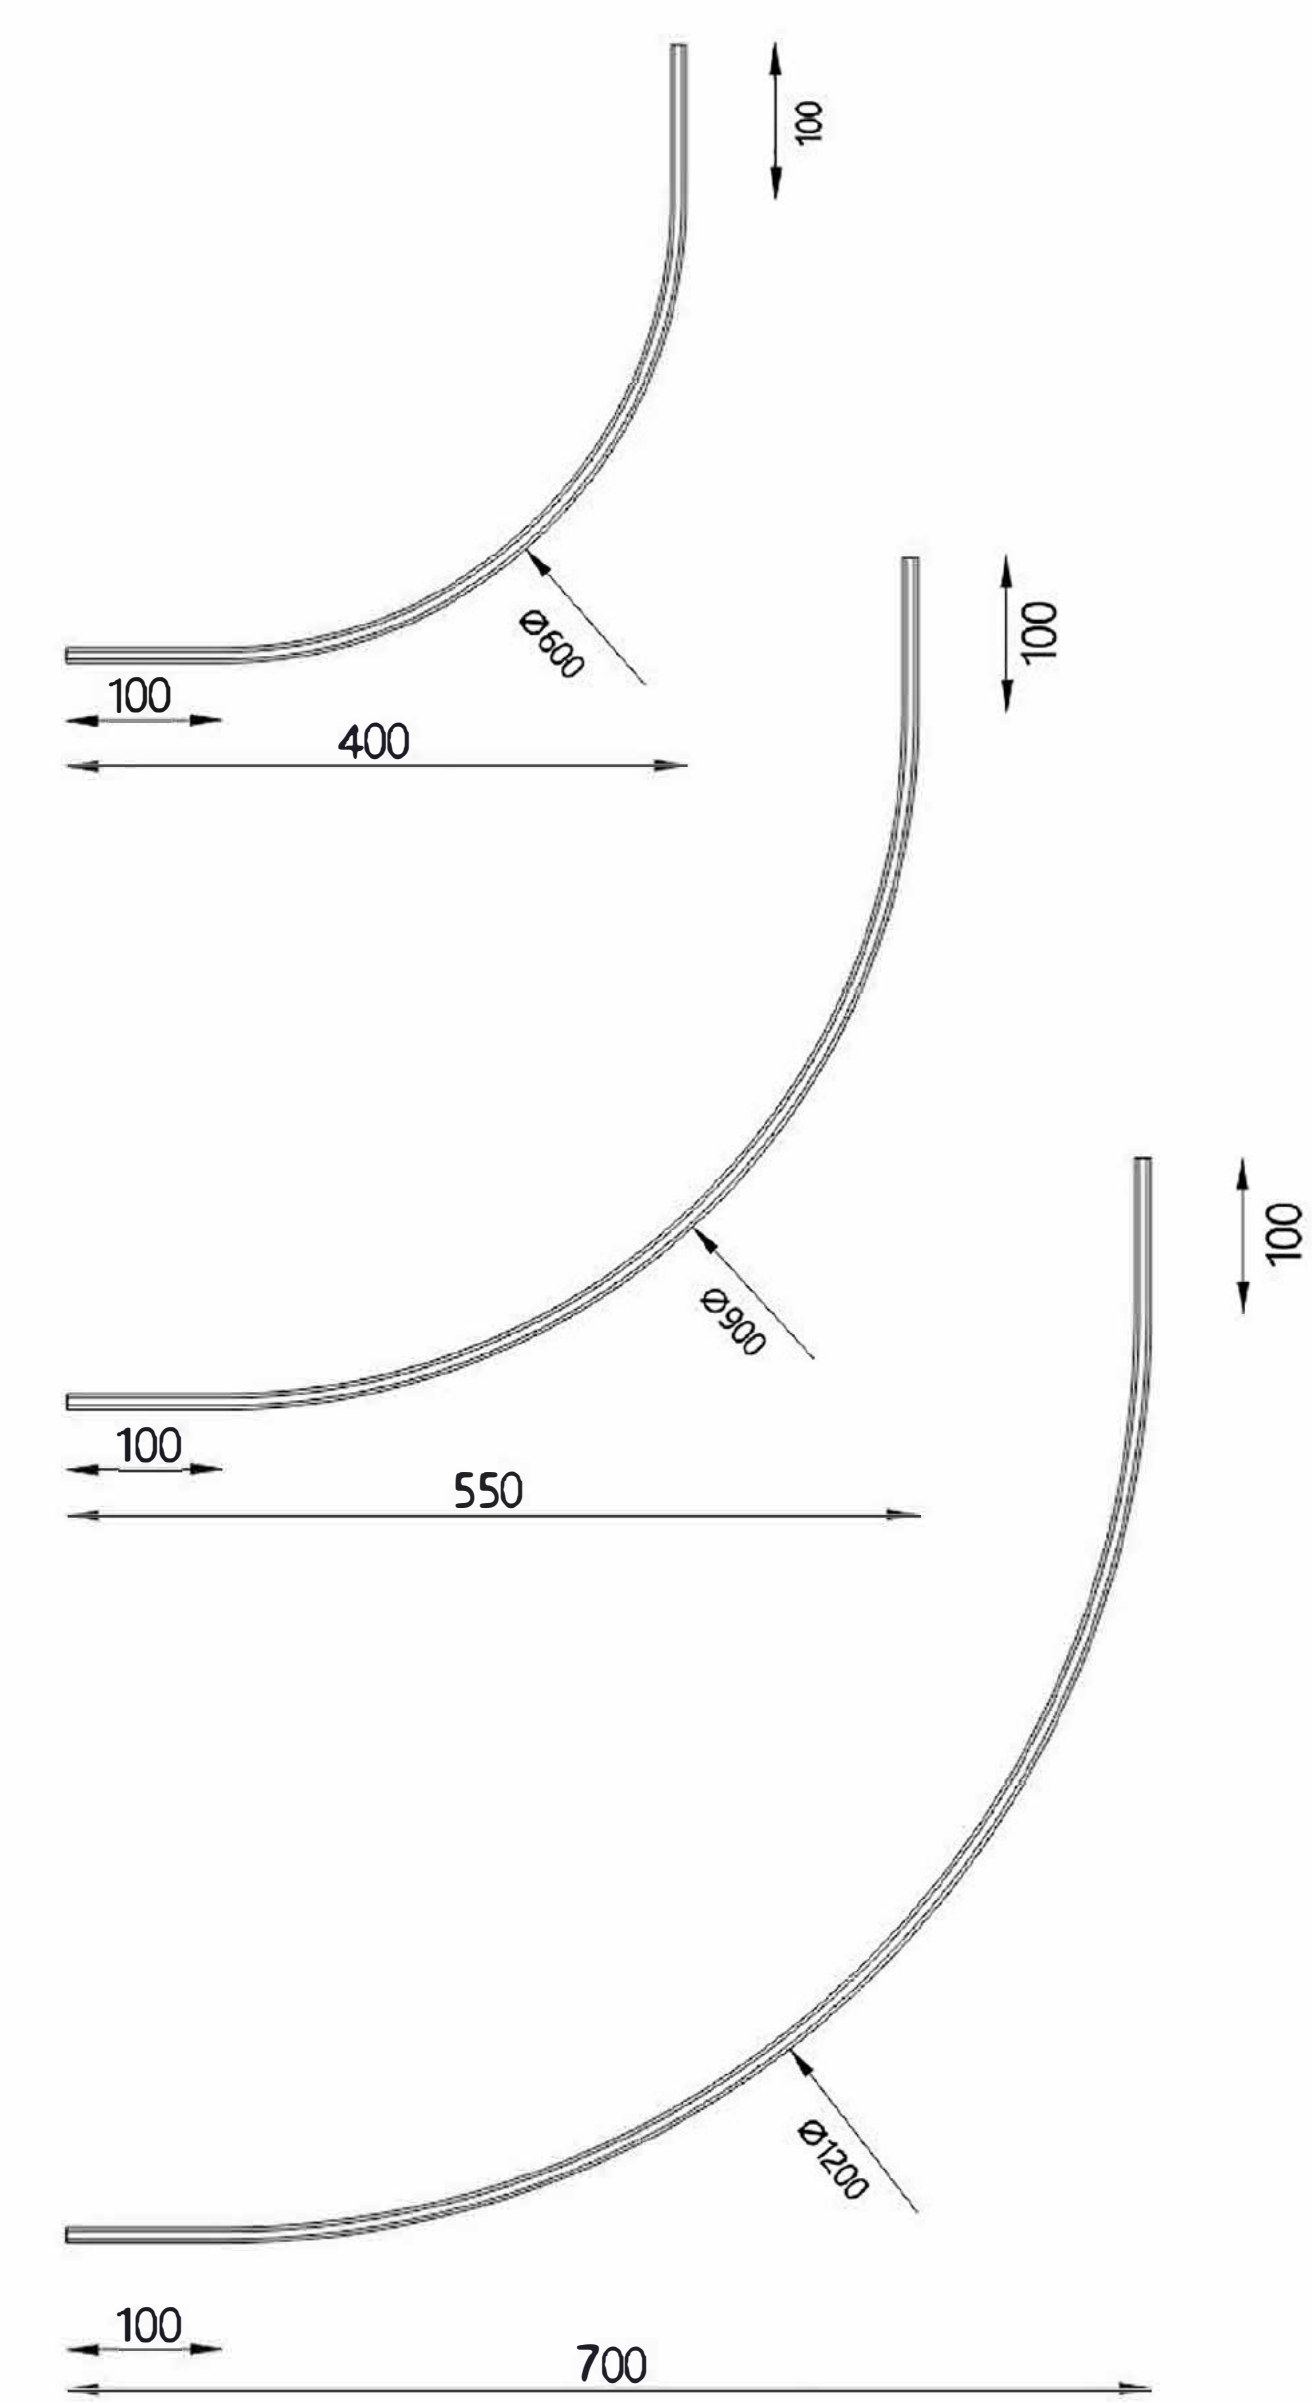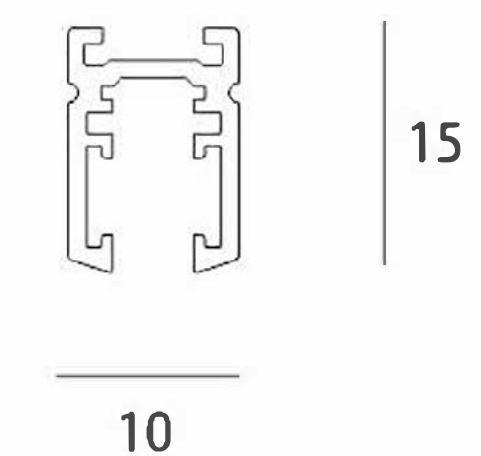

Type	Electrical parameters	Maximum current	Rounded corners
KST R600Q	DC 24V	4A max	Φ 600
KST R900Q	DC 24V	4A max	Φ 900
KST-R1200Q	DC 24V	4A max	Φ 1200





Mini
magnet track





KSA0525DR

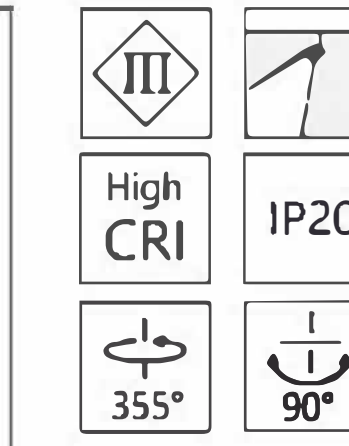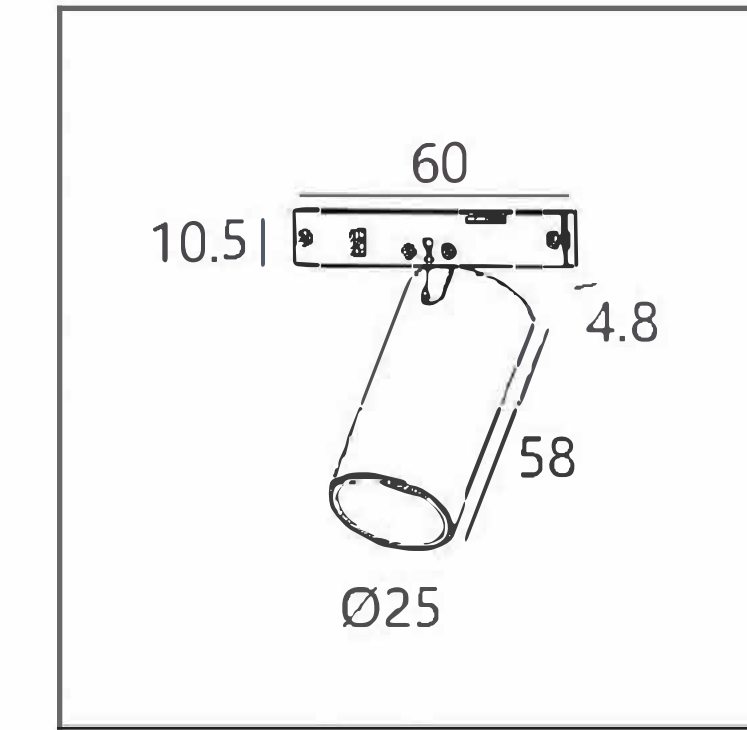

LightSource:
LED

Luminousflux:
180lm

CRI:
Ra>90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
3W

Outputvoltage:
3V

Outputcurrent:
600mA



OPTIC:
15°/24°/36°

Mainsvoltage:
DC24V

Description:
Magnetic rail spotlight

Cutout:
/

KSA0535DR

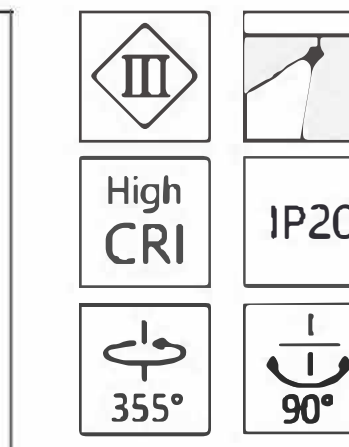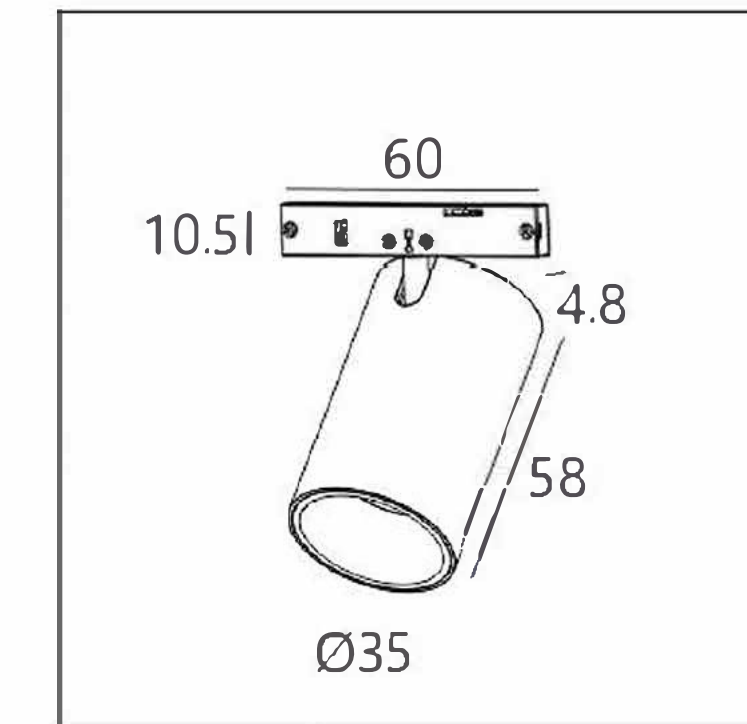

LightSource:
COB

Luminousflux:
500lm

CRI:
Ra>90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
5W

Outputvoltage:
9V

Outputcurrent:
500mA



OPTIC:
15°/24°/36°

Mainsvoltage:
DC24V

Description:
Magnetic rail spotlight

Cutout:
/

KSA0545DR

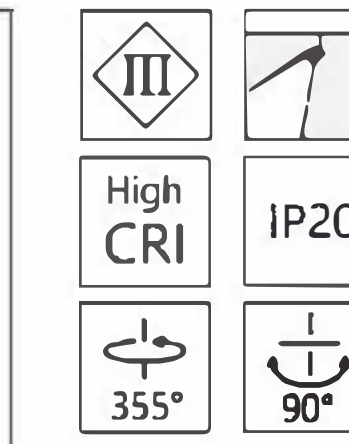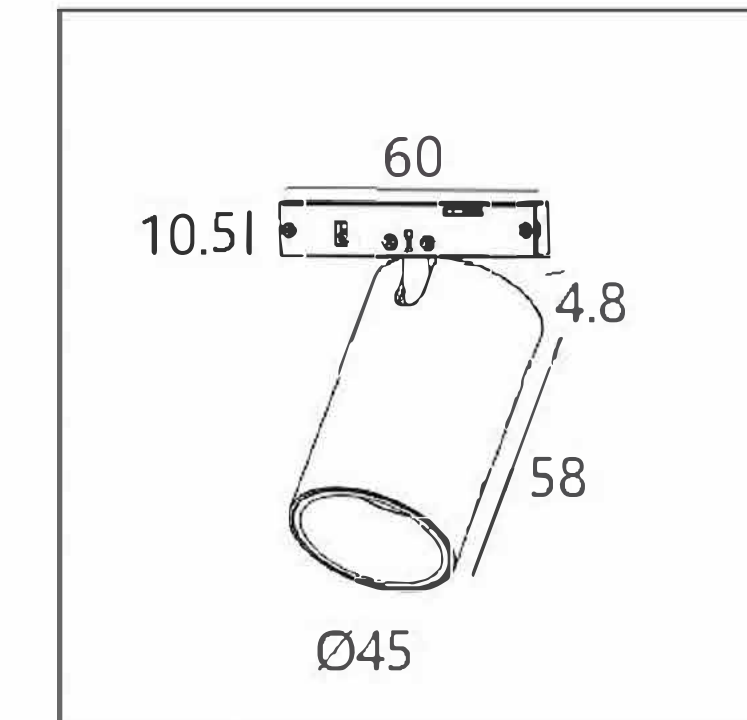

LightSource:
COB

Luminousflux:
700lm

CRI:
Ra>90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
9W

Outputvoltage:
18V

Outputcurrent:
400mA


OPTIC:
15°/24°/36°

Mainsvoltage:
DC24V

Description:
Magnetic rail spotlight

Cutout:
/

COLORS



BK

Mini
magnet track



E x t r e m e l y

s l i m



d e s i g n

Mini magnet track



MINI MAGNET TRACK K05

KA0560NR-A

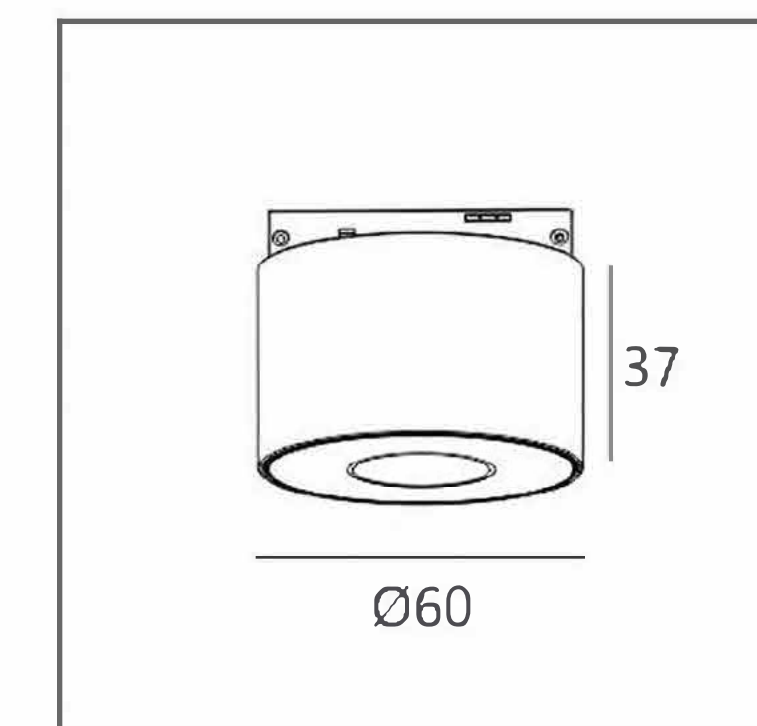


LightSource: COB
 Luminousflux: 450lm
 CRI: Ra>90
 CCT: 2700K/3000K/4000K/5000K

Material: Aluminum
 Power: 5W
 Outputvoltage: 9V
 Outputcurrent: 450mA

OPTIC: 15°/24°/36°
 Mainsvoltage: DC24V
 Description: Magneticsuction
 Colors: BK AU WH GY

KA0560NR-B

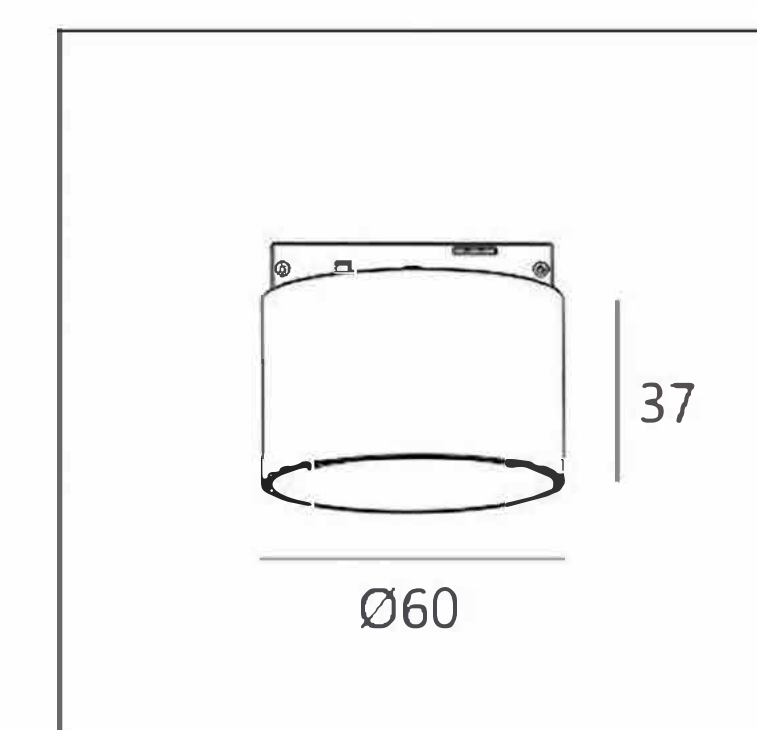


LightSource: COB
 Luminousflux: 450lm
 CRI: Ra>90
 CCT: 2700K/3000K/4000K/5000K

Material: Aluminum
 Power: 5W
 Outputvoltage: 9V
 Outputcurrent: 450mA

OPTIC: 15°/24°/36°
 Mainsvoltage: DC24V
 Description: Magneticsuction
 Colors: BK AU WH GY

KA0560NR-C


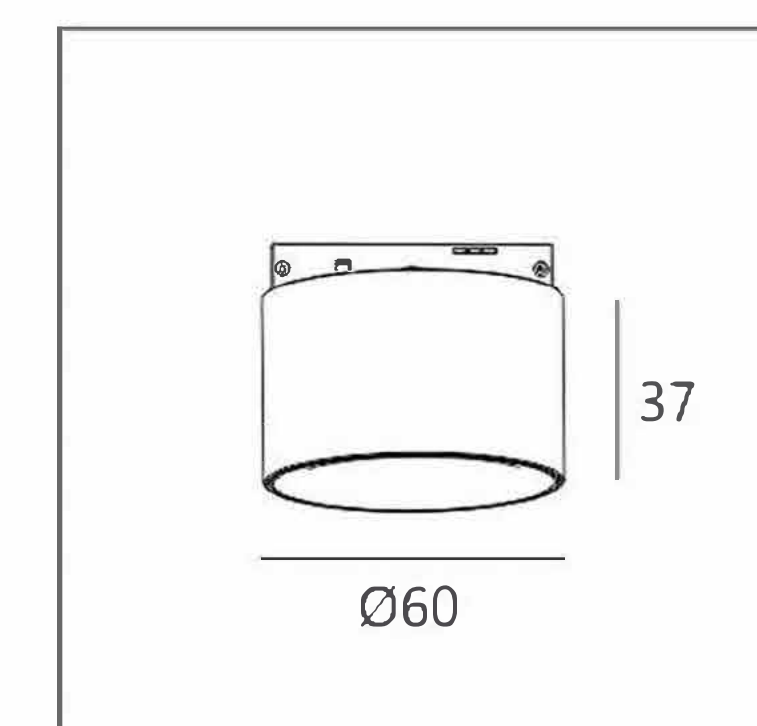


LightSource: COB
 Luminousflux: 450lm
 CRI: Ra>90
 CCT: 2700K/3000K/4000K/5000K

Material: Aluminum
 Power: 5W
 Outputvoltage: 9V
 Outputcurrent: 450mA

OPTIC: 15°/24°/36°
 Mainsvoltage: DC24V
 Description: Magneticsuction
 Colors: BK AU WH GY

KA0560NR-D

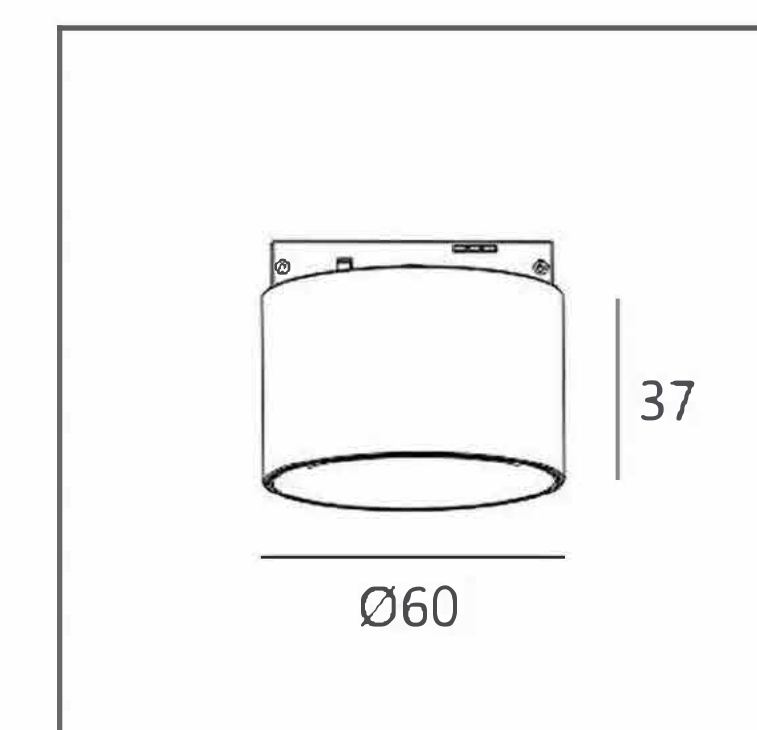

LightSource: COB
 Luminousflux: 450lm
 CRI: Ra>90
 CCT: 2700K/3000K/4000K/5000K

Material: Aluminum
 Power: 5W
 Outputvoltage: 9V
 Outputcurrent: 450mA



OPTIC: 15°/24°/36°
 Mainsvoltage: DC24V
 Description: Magneticsuction
 Colors: BK AU WH GY

Mini
magnet track





KB0513NR

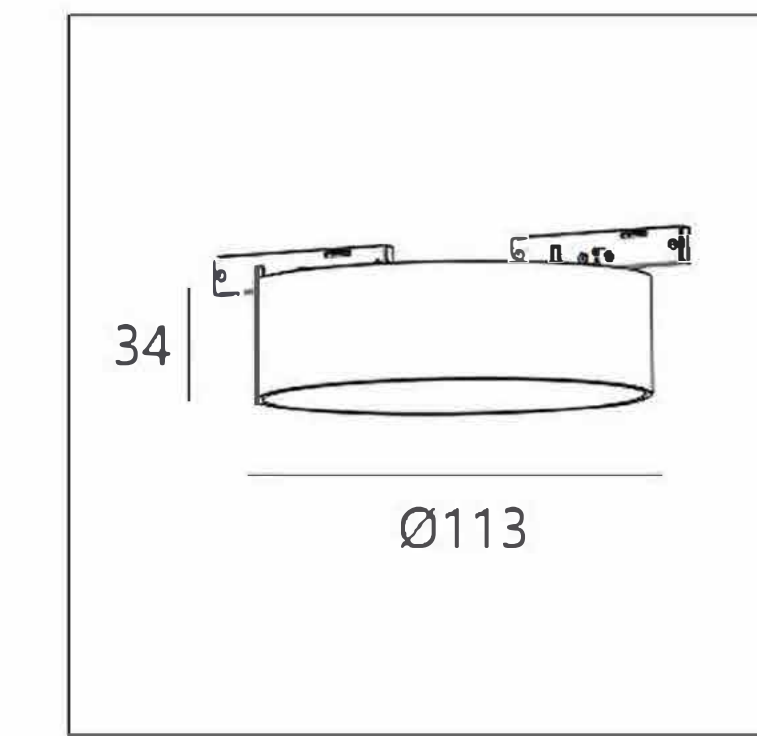

LightSource:
LED

Luminousflux:
700lm

CRI:
Ra>80

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
12W

Outputvoltage:
24V

Outputcurrent:
/


OPTIC:
100°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Cutout:
/

KB0514NR

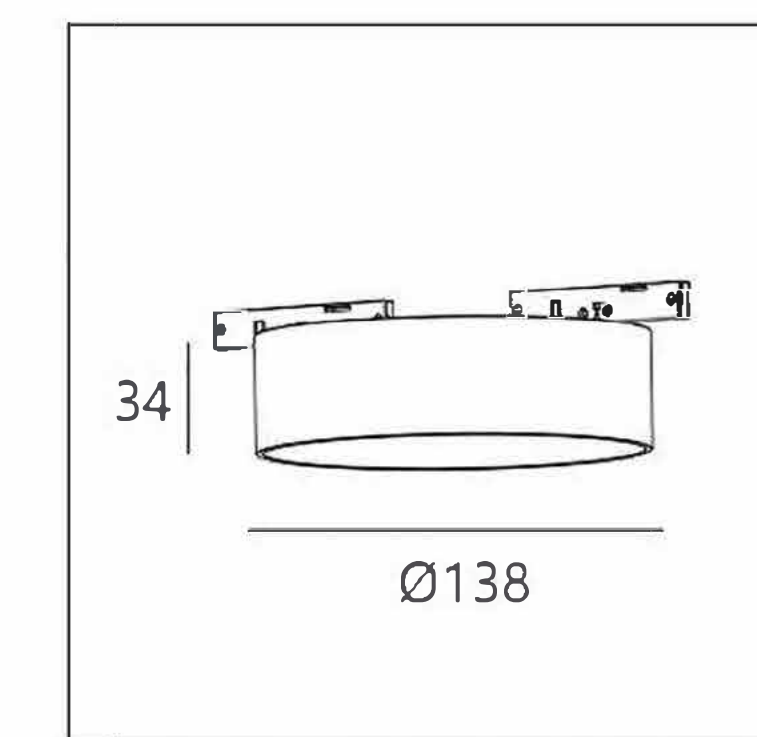

LightSource:
LED

Luminousflux:
1100lm

CRI:
Ra>80

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
18W

Outputvoltage:
24V

Outputcurrent:
/

OPTIC:
100°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Cutout:
/

COLORS



Mini
magnet track



E x t r e m e l y


s l i m

d e s i g n

Mini magnet track



KLB0530NS

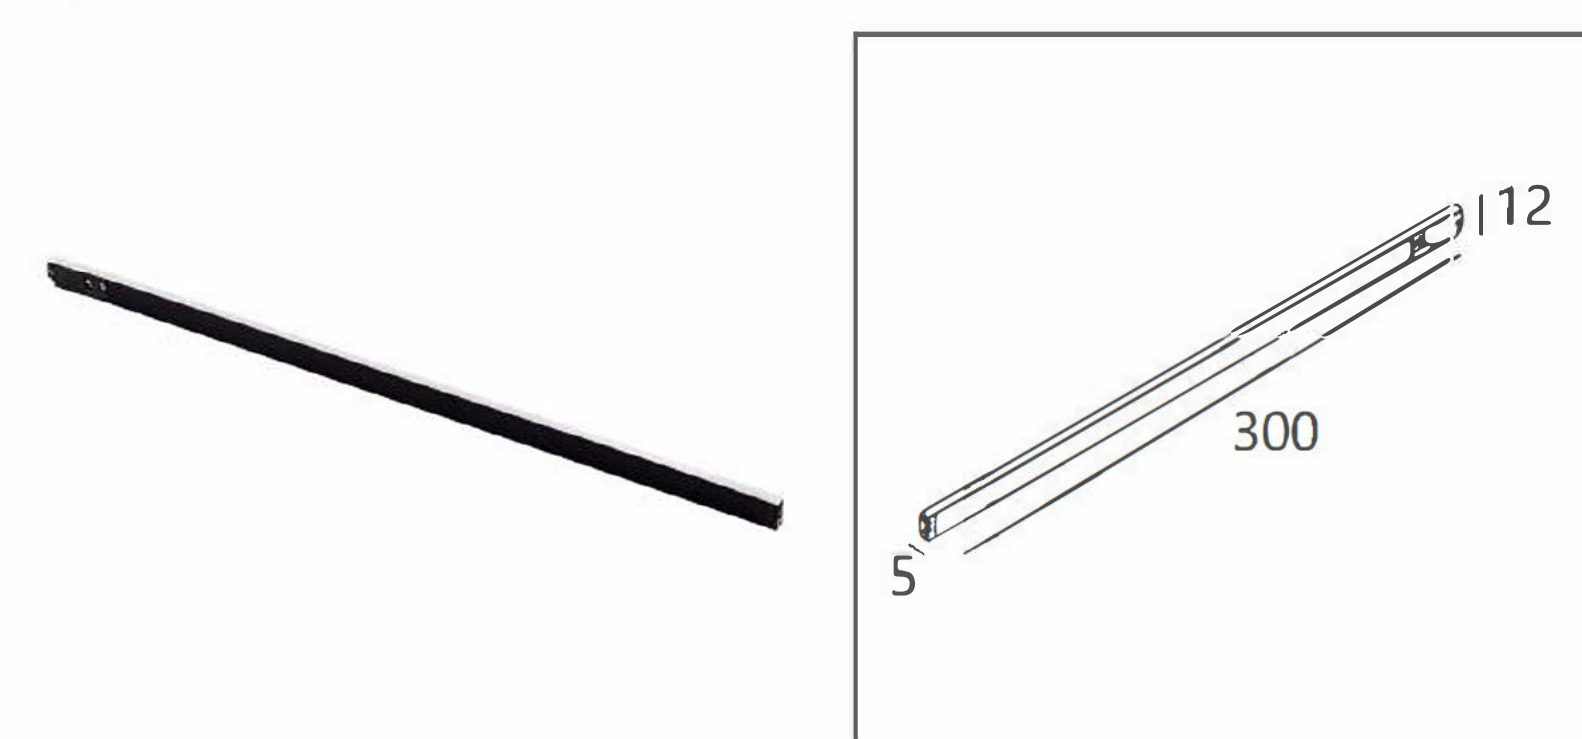

LightSource:
LED

Luminousflux:
450lm

CRI:
Ra>80

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum+PC

Power:
5W

Outputvoltage:
24V

Outputcurrent:
/



OPTIC:
100°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Cutout:
/

KLB0560NS

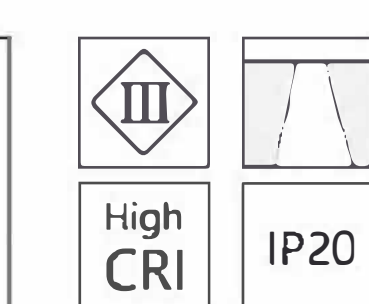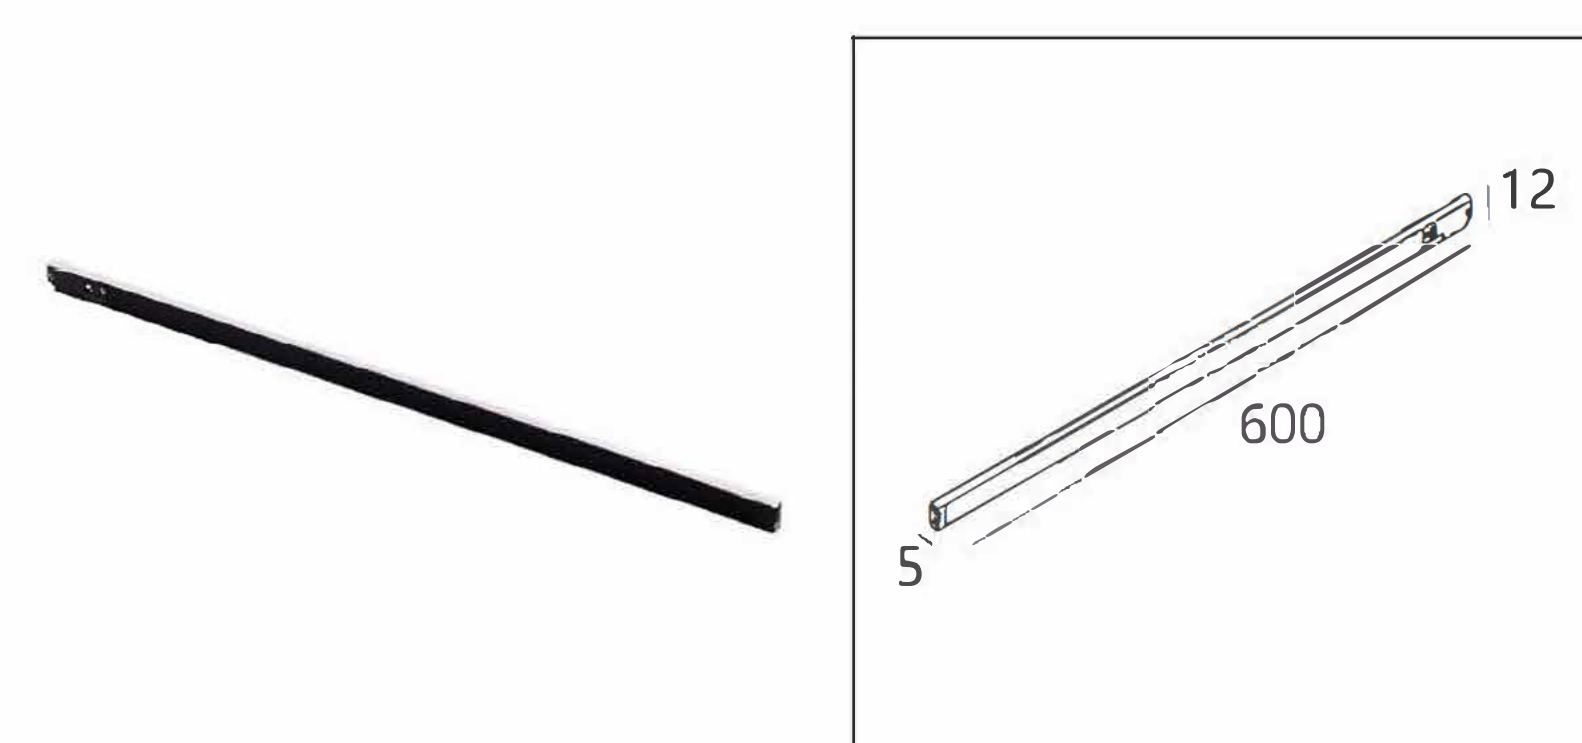

LightSource:
LED

Luminousflux:
900lm

CRI:
Ra>80

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum+PC

Power:
10W

Outputvoltage:
24V

Outputcurrent:
/


OPTIC:
100°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Cutout:
/

KLB0590NS

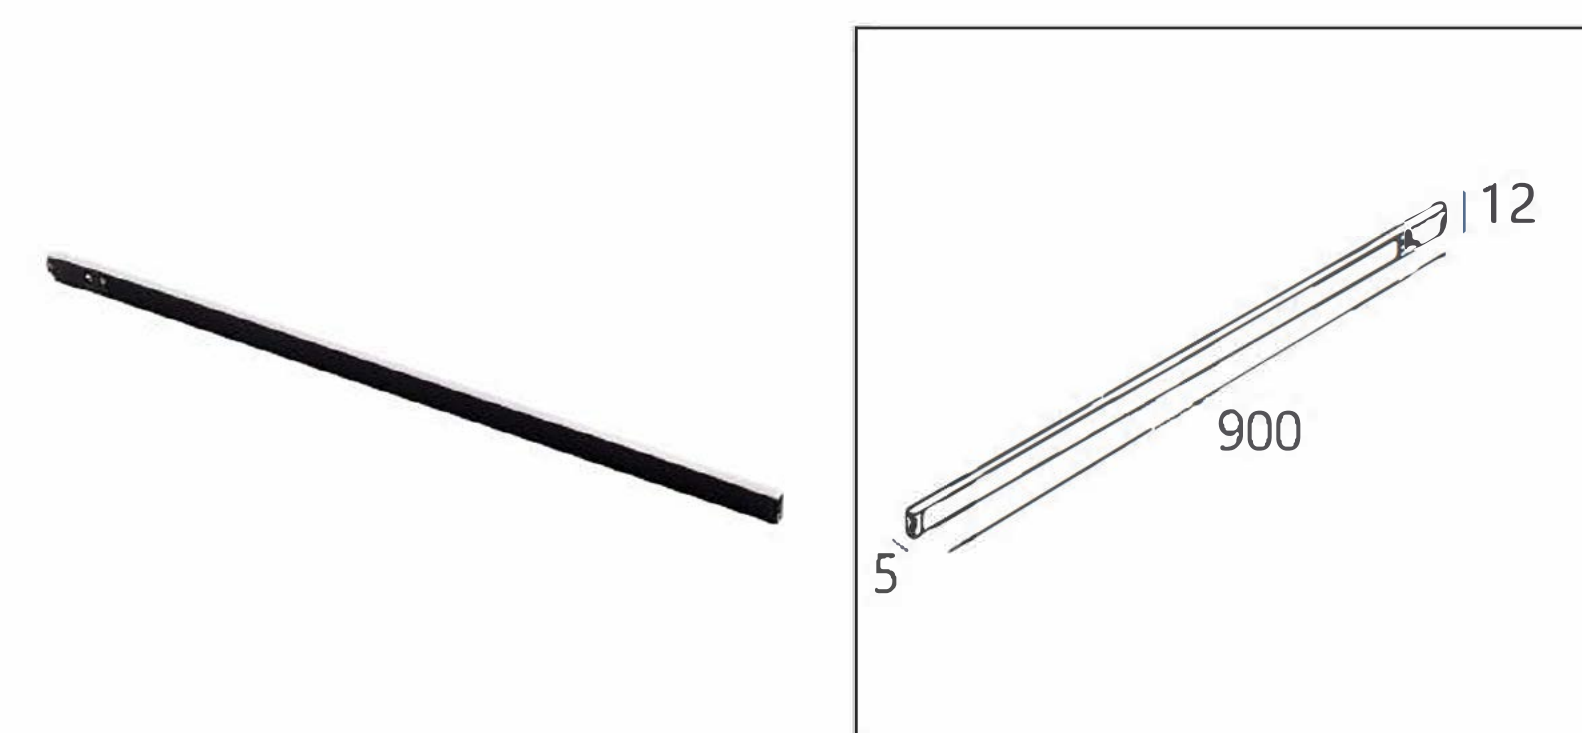

LightSource:
LED

Luminousflux:
1300lm

CRI:
Ra>80

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum+PC

Power:
15W

Outputvoltage:
24V

Outputcurrent:
/

OPTIC:
100°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Cutout:
/

COLORS



BK

Mini
magnet track





MINI MAGNET TRACK K05

MINI MAGNET TRACK K05

تصميم بسيط وعملي

تصميم بسيط وعملي

KPA0540NR

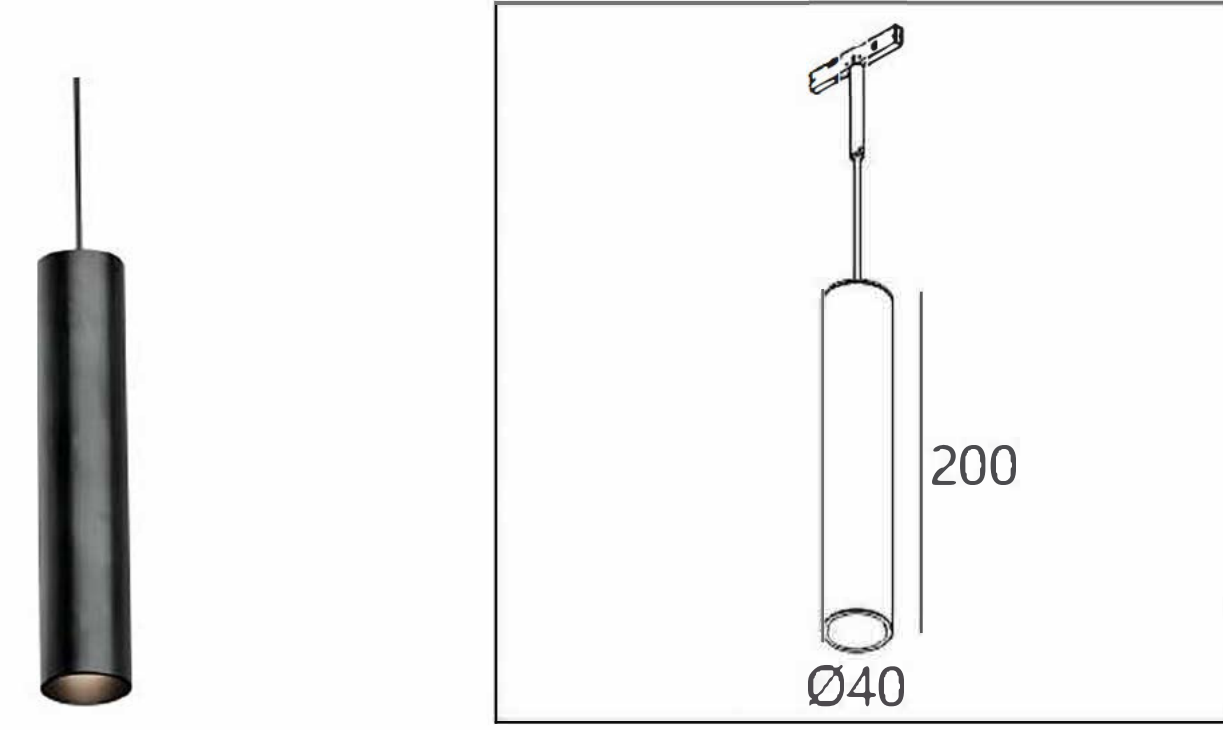

LightSource:
COB

Luminousflux:
500lm

CRI:
Ra > 90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
7W

Outputvoltage:
36V

Outputcurrent:
150mA



OPTIC:
15°/24°/36°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Cutout:
/

KPA0518NR-D

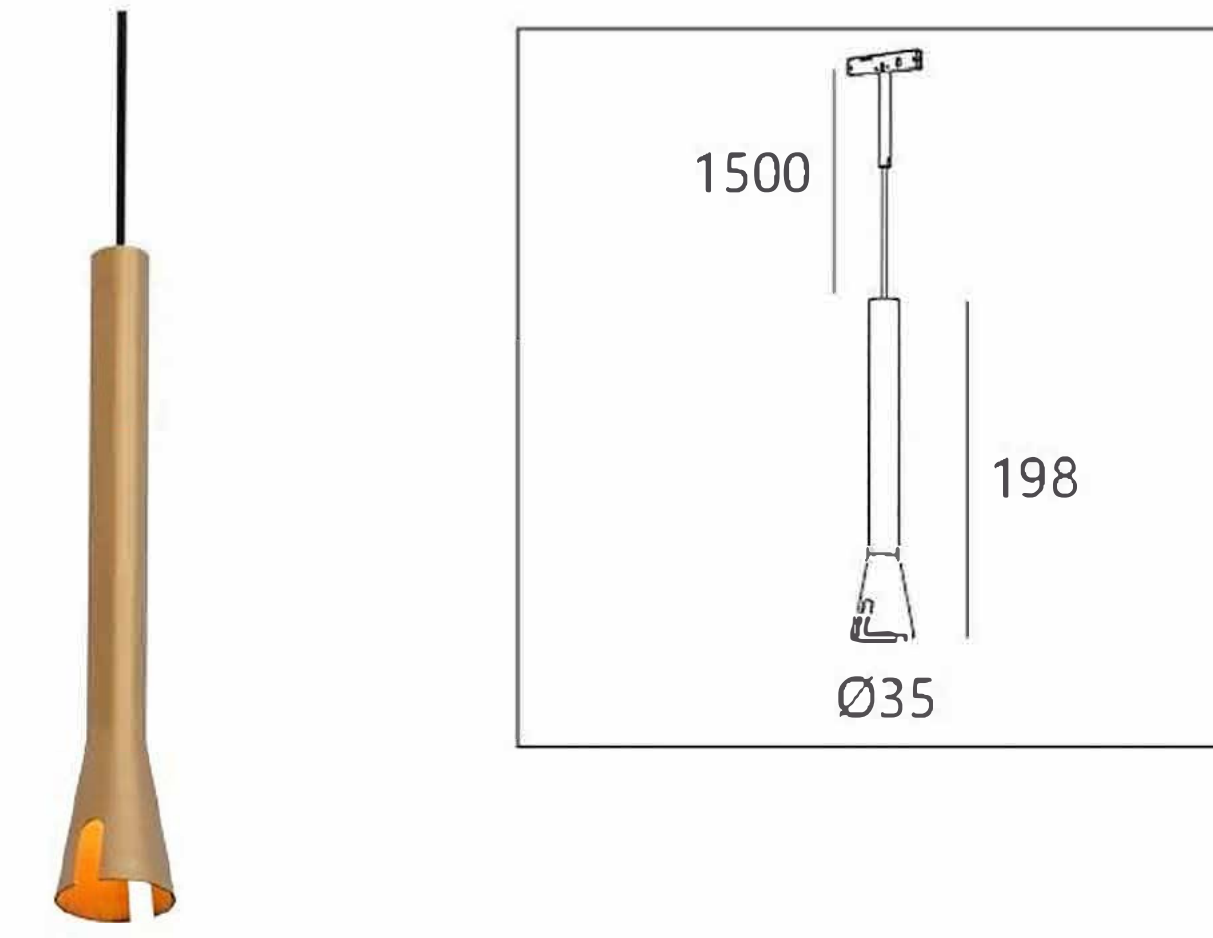

LightSource:
LED

Luminousflux:
180lm

CRI:
Ra > 90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
3W

Outputvoltage:
3V

Outputcurrent:
600mA



OPTIC:
15°/24°/36°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Cutout:
/

KPA0518NR-A

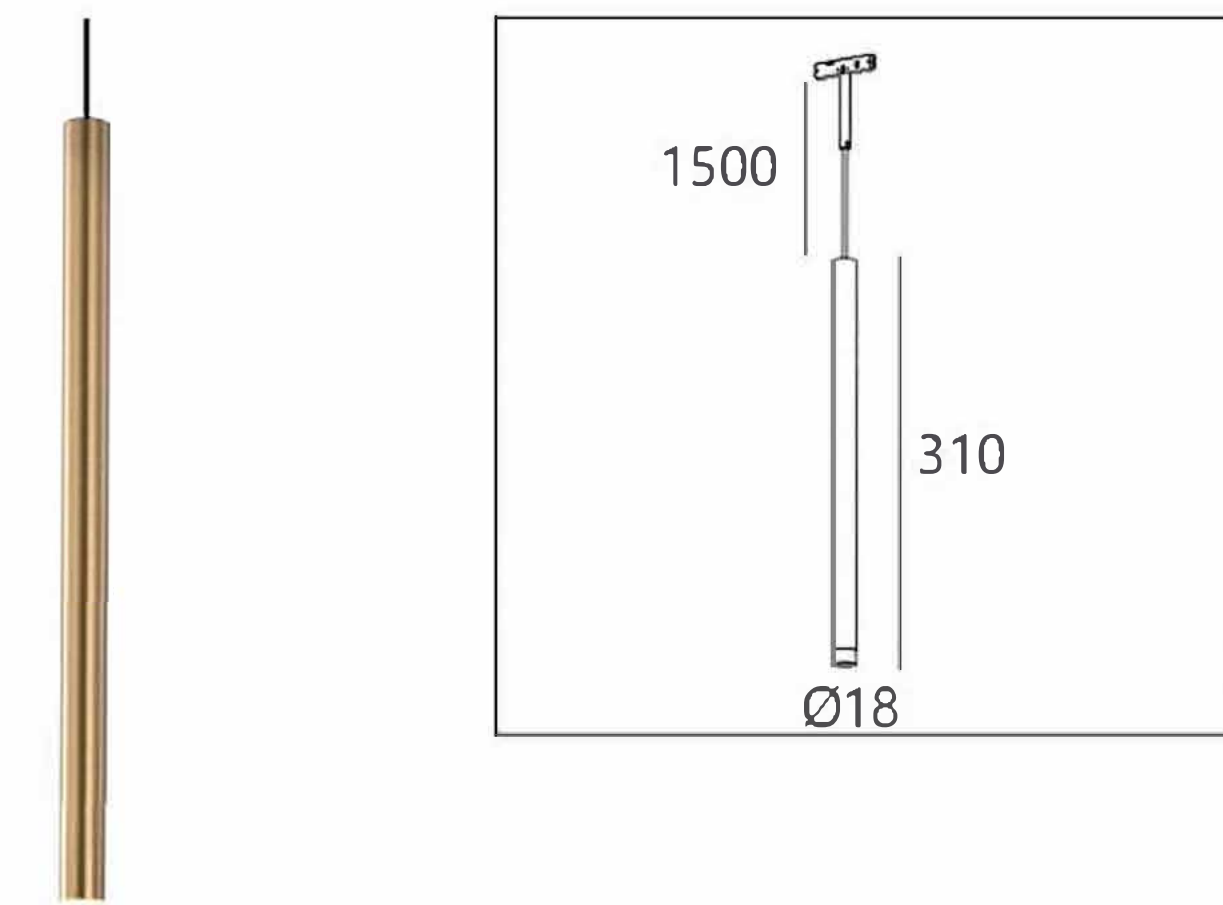

LightSource:
LED

Luminousflux:
180lm

CRI:
Ra > 90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
3W

Outputvoltage:
3V

Outputcurrent:
600mA



OPTIC:
15°/24°/36°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Cutout:
/

KPB6560NR

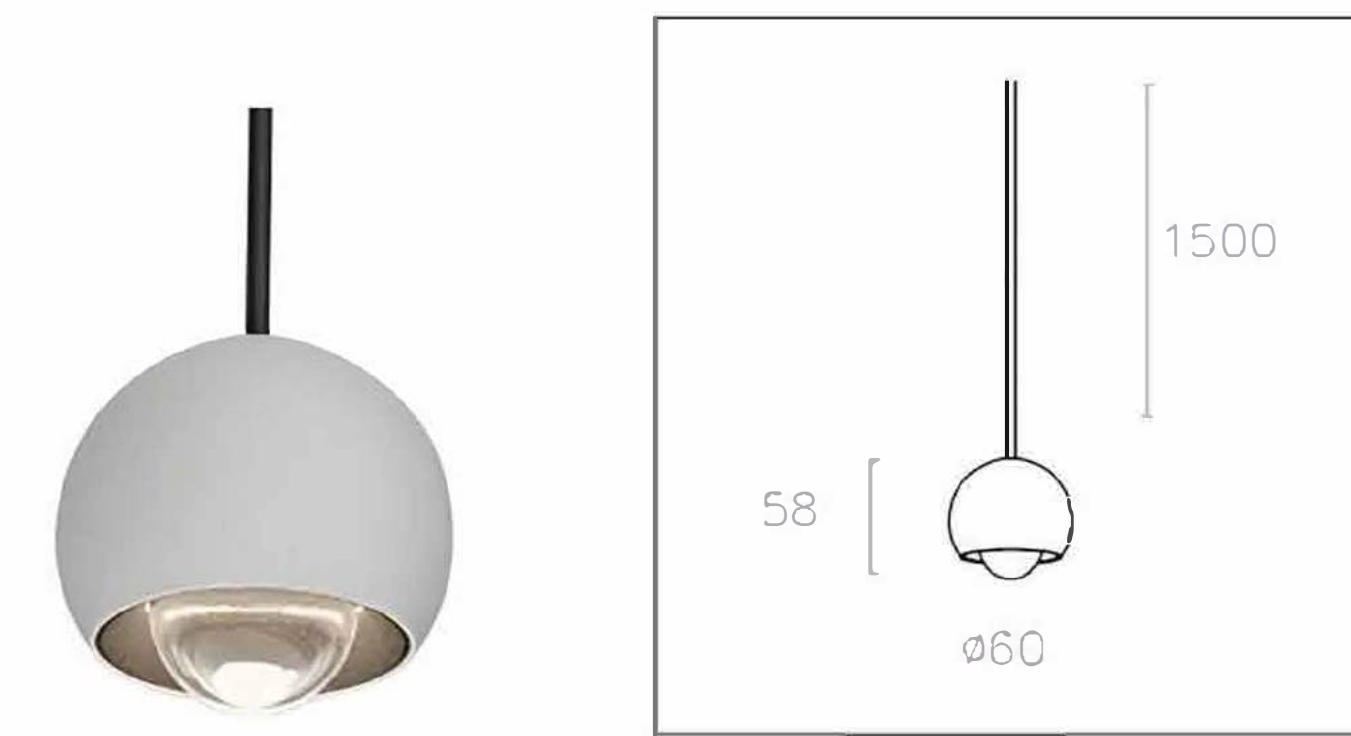

LightSource:
COB

Luminousflux:
450lm

CRI:
Ra > 90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
5W

Outputvoltage:
9V

Outputcurrent:
450mA



OPTIC:
40°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Cutout:
/

KPA0518NR-B

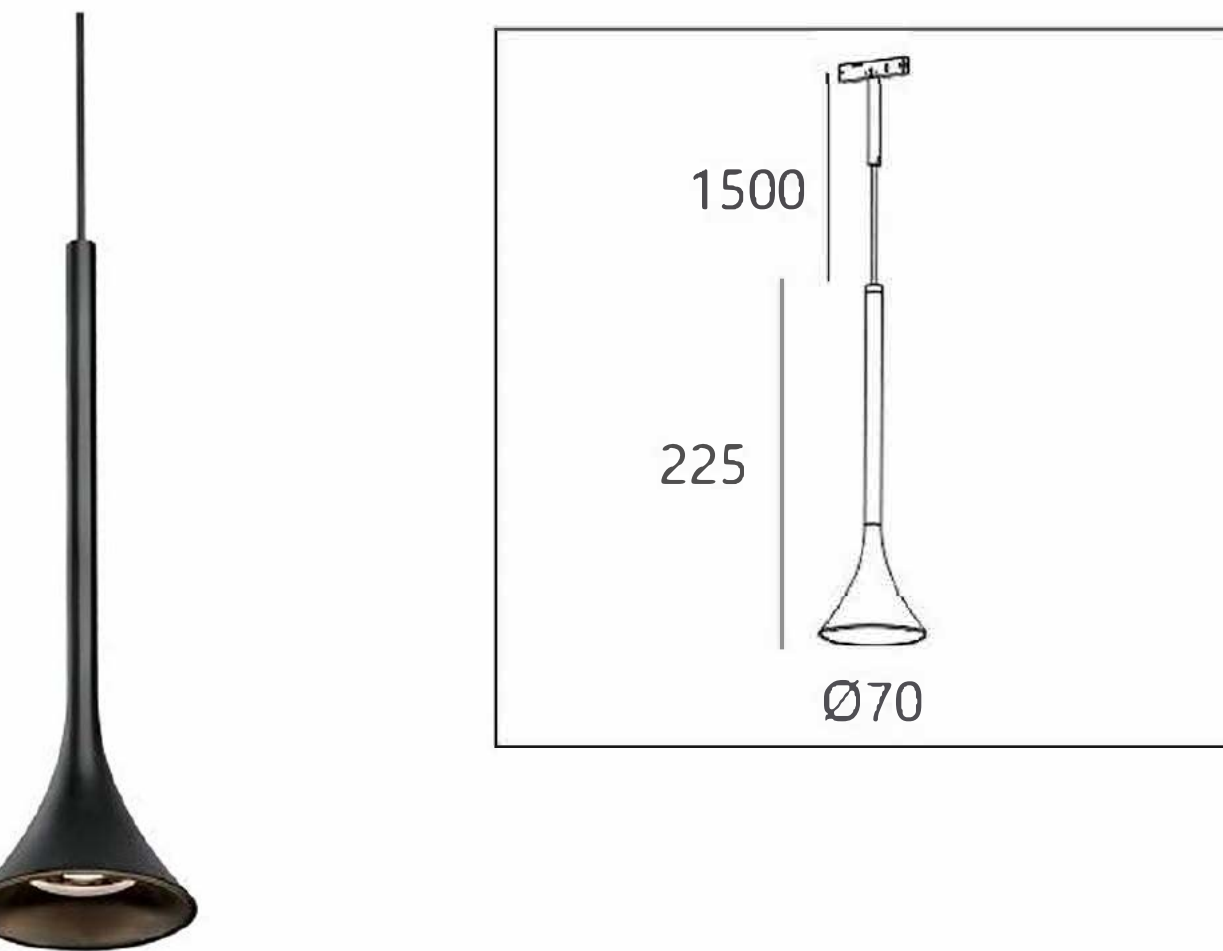

LightSource:
LED

Luminousflux:
180lm

CRI:
Ra > 90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
5W

Outputvoltage:
9V

Outputcurrent:
450mA



OPTIC:
15°/24°/36°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Cutout:
/

KPB6208NR

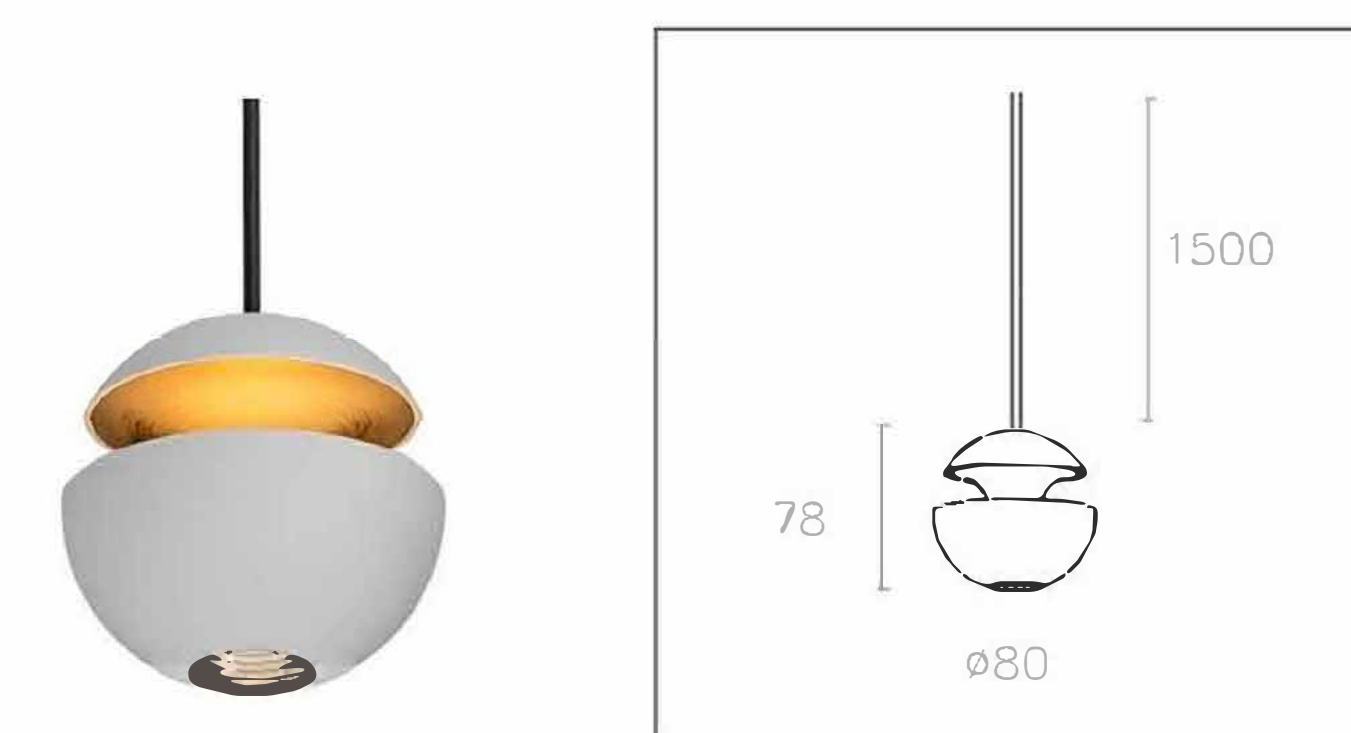

LightSource:
LED

Luminousflux:
180lm

CRI:
Ra > 90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
3W

Outputvoltage:
3V

Outputcurrent:
600mA



OPTIC:
15°/24°/36°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Cutout:
/

KPA0518NR-C

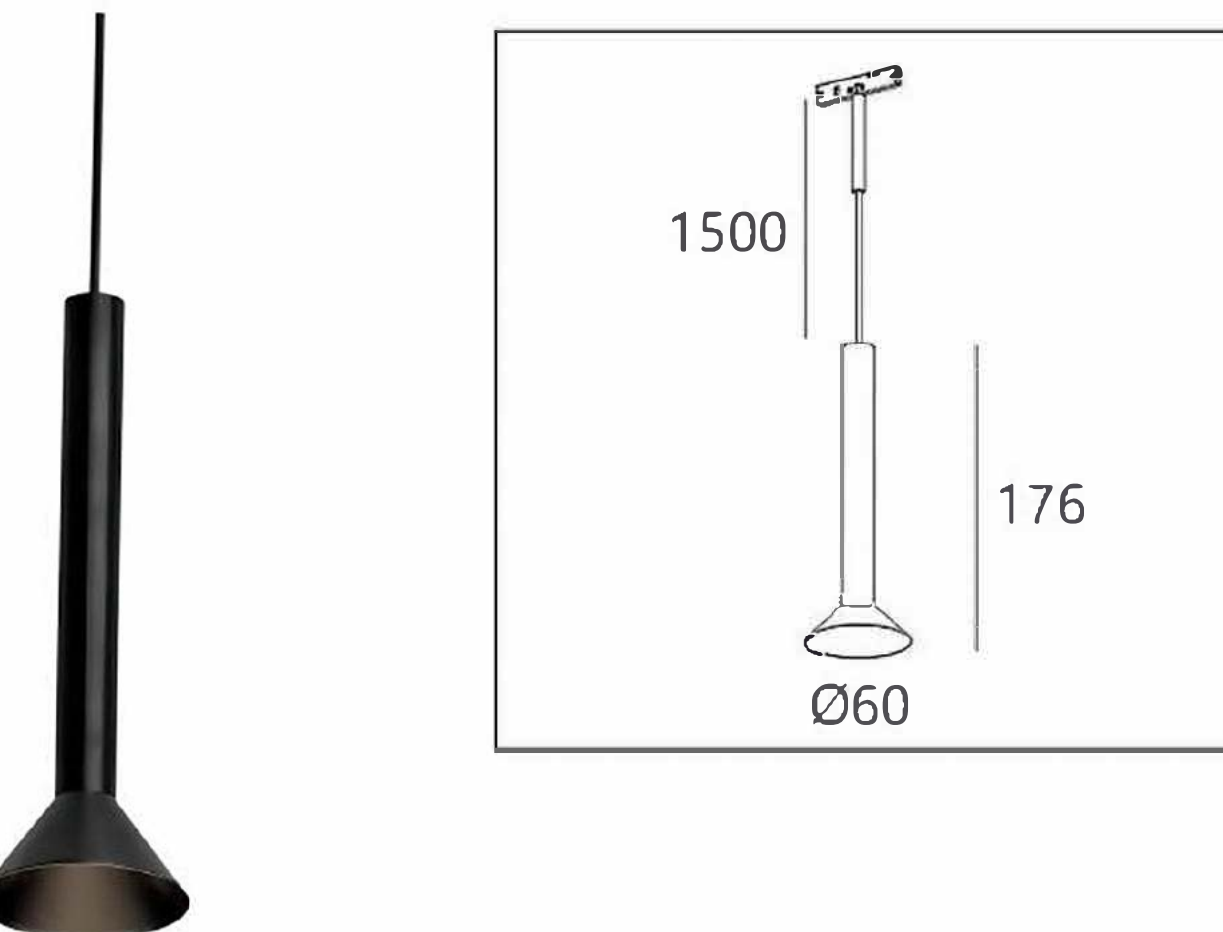

LightSource:
LED

Luminousflux:
180lm

CRI:
Ra > 90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
3W

Outputvoltage:
3V

Outputcurrent:
600mA



OPTIC:
15°/24°/36°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Cutout:
/

KPB7080NR

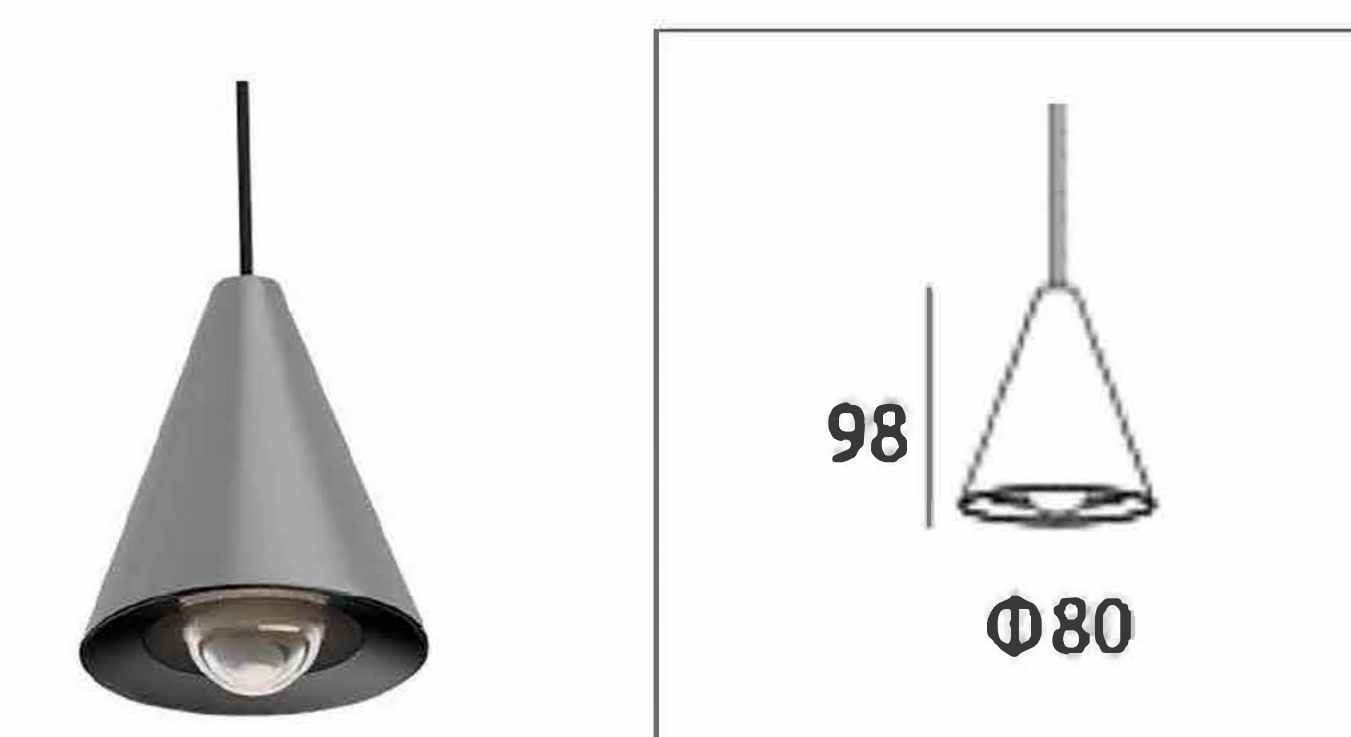

LightSource:
COB

Luminousflux:
450lm

CRI:
Ra > 90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
5W

Outputvoltage:
9V

Outputcurrent:
450mA

OPTIC:
40°

Mainsvoltage:
DC24V


Description:
Magneticsuction

Cutout:
/

COLORS



COLORS

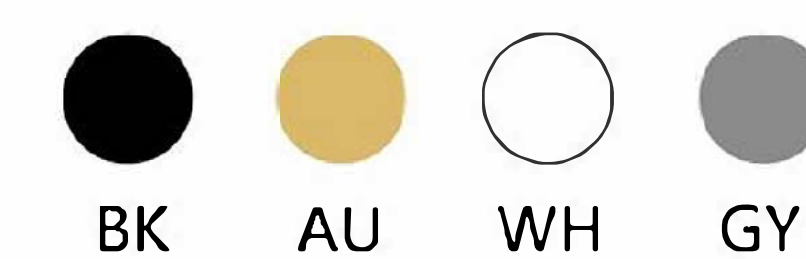



Mini
magnet track



MINI MAGNET TRACK K05



KLB1030NS

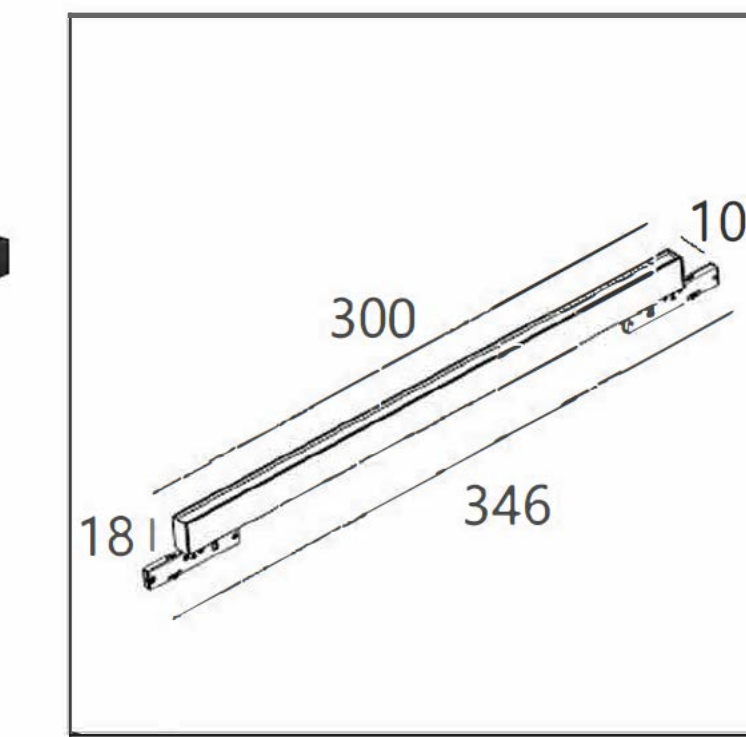

LightSource:
LED

Luminousflux:
700lm

CRI:
Ra>80

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
8W

Outputvoltage:
24V

Outputcurrent:
/



OPTIC:
100°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Cutout:
/

KLB1045NS

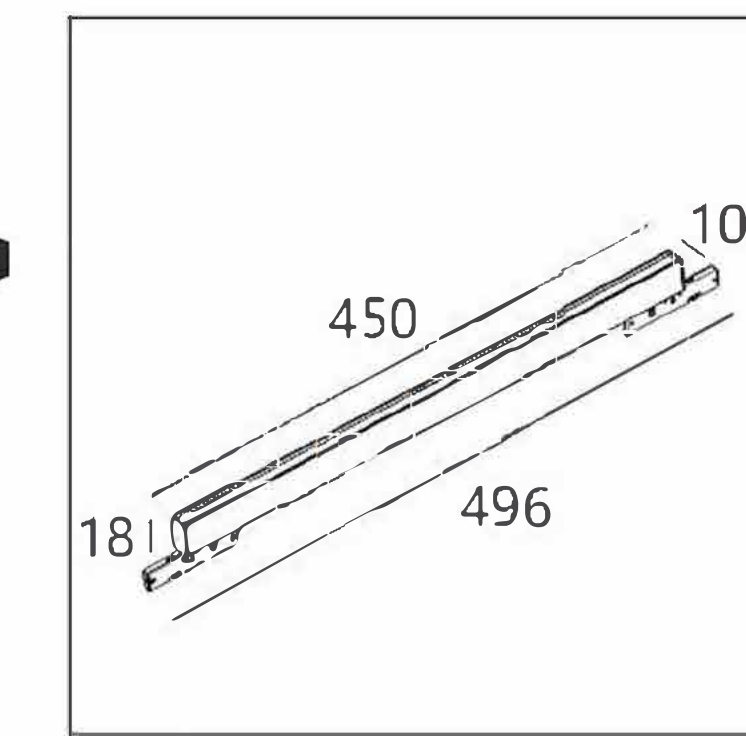

LightSource:
LED

Luminousflux:
1100lm

CRI:
Ra>80

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
12W

Outputvoltage:
24V

Outputcurrent:
/



OPTIC:
100°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Cutout:
/

KLB1060NS

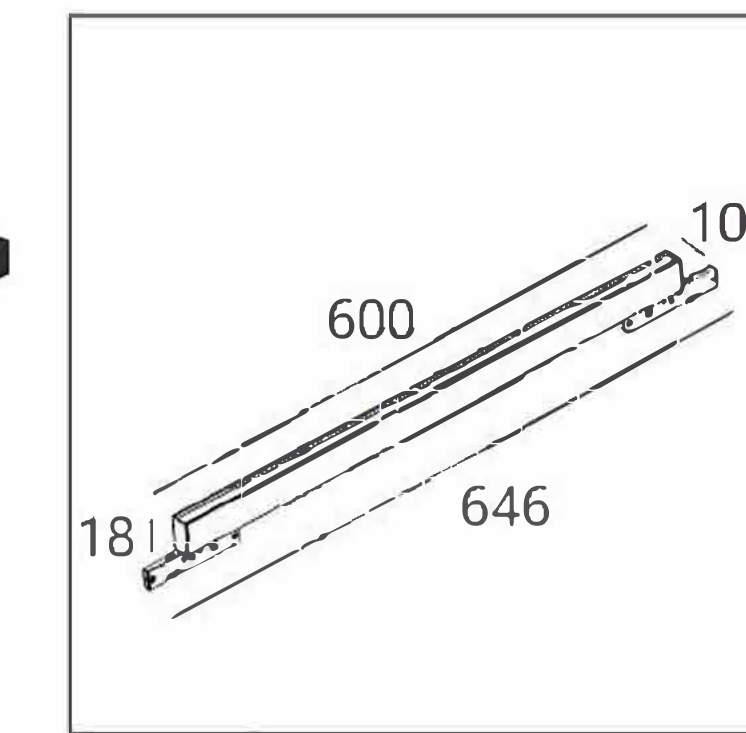

LightSource:
LED

Luminousflux:
1300lm

CRI:
Ra>80

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
16W

Outputvoltage:
24V

Outputcurrent:
/


OPTIC:
100°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Cutout:
/

KLB1090NS

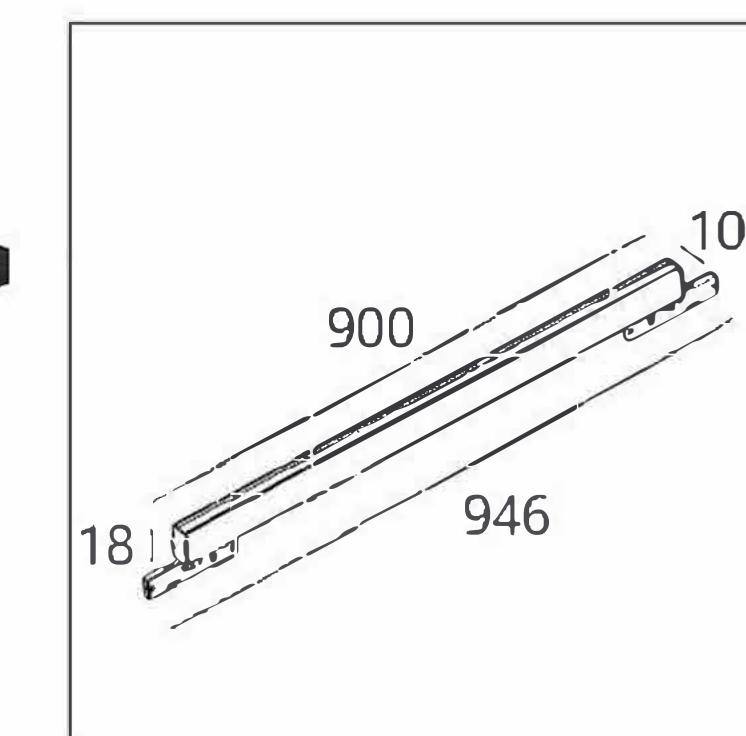

LightSource:
LED

Luminousflux:
2300lm

CRI:
Ra>80

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
21W

Outputvoltage:
24V

Outputcurrent:
/

OPTIC:
100°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Cutout:
/

COLORS



BK

Mini
magnet track




MINI MAGNET TRACK K05

MINI MAGNET TRACK K05

MINI MAGNET TRACK K05

KLA1006NS

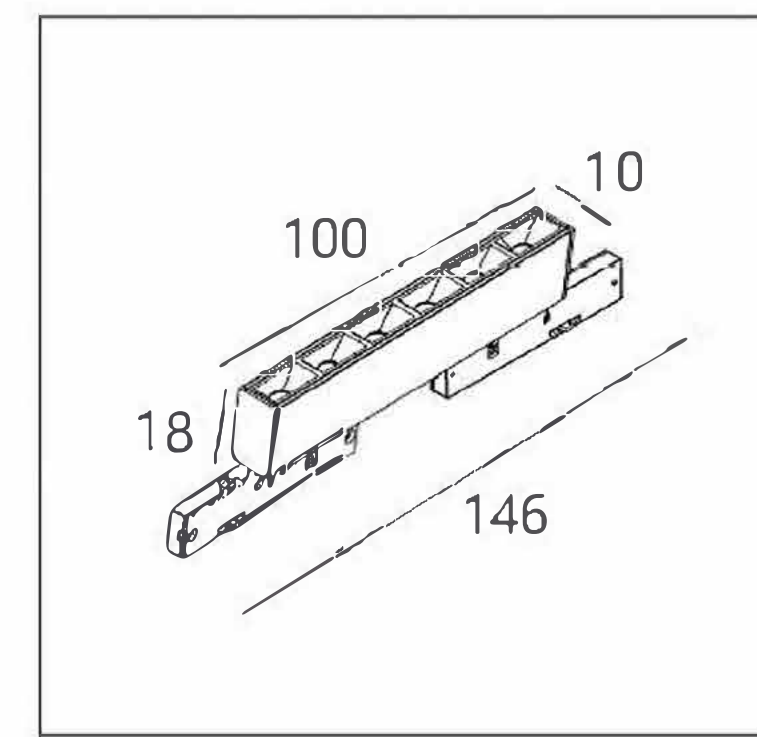

LightSource:
LED

Luminousflux:
500lm

CRI:
Ra > 90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
5W

Outputvoltage:
24V

Outputcurrent:
/



OPTIC:
30°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Cutout:
/

KLA1012NS

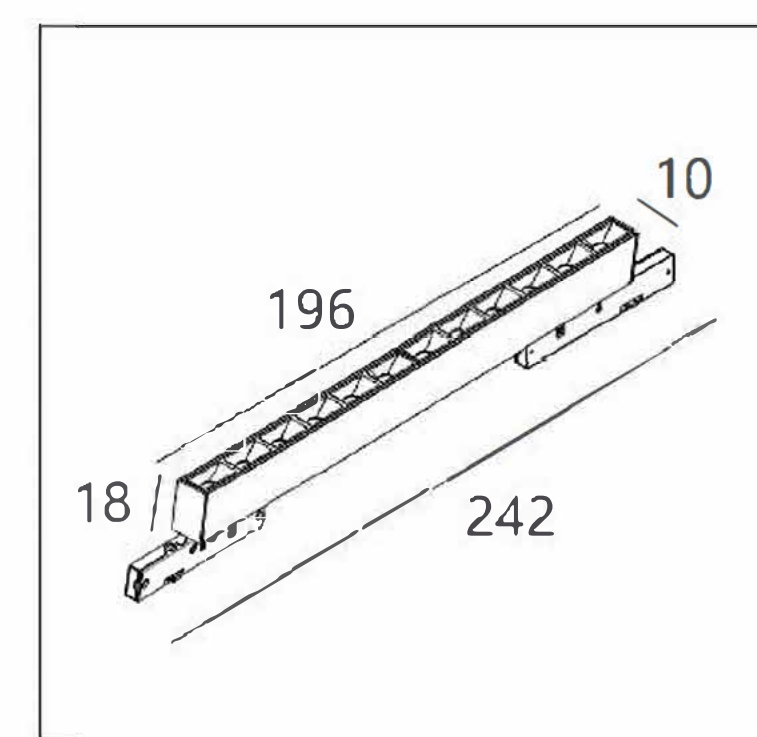

LightSource:
LED

Luminousflux:
1100lm

CRI:
Ra > 90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
10W

Outputvoltage:
24V

Outputcurrent:
/


OPTIC:
30°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Cutout:
/

KLA1018NS

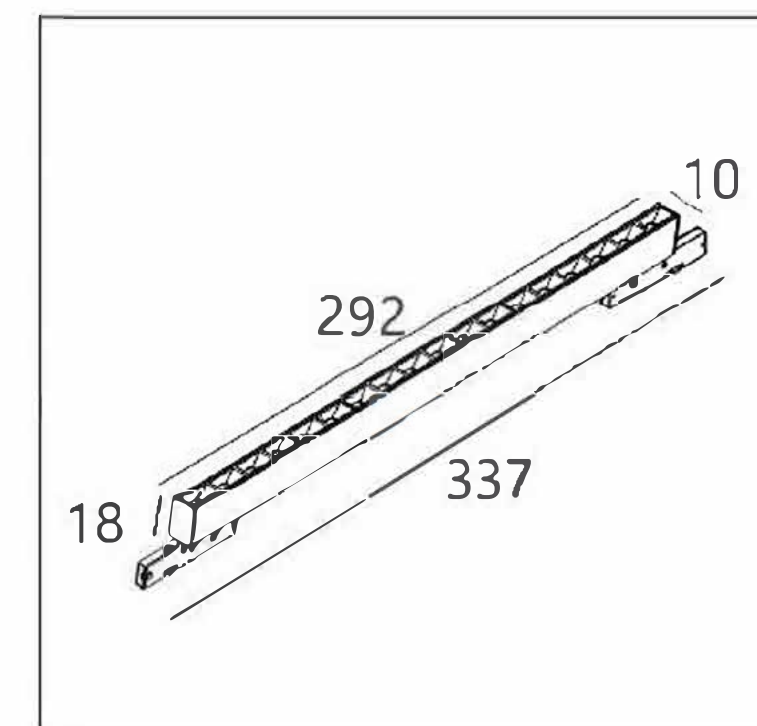

LightSource:
LED

Luminousflux:
1600lm

CRI:
Ra > 90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
15W

Outputvoltage:
24V

Outputcurrent:
/



OPTIC:
30°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Cutout:
/

KLA1024NS

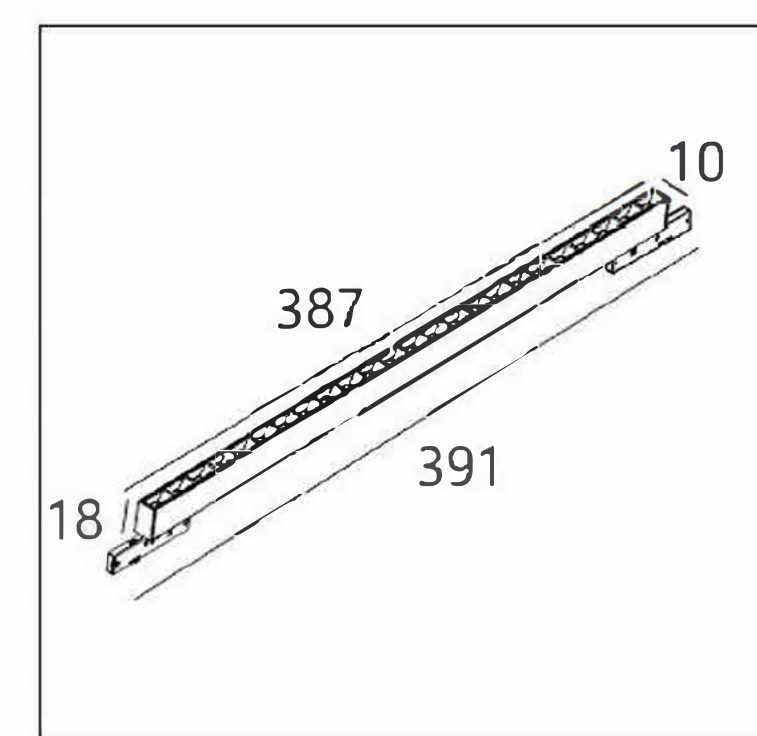

LightSource:
LED

Luminousflux:
2300lm

CRI:
Ra > 90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
20W

Outputvoltage:
24V

Outputcurrent:
/


OPTIC:
30°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Cutout:
/

KLA1506DS

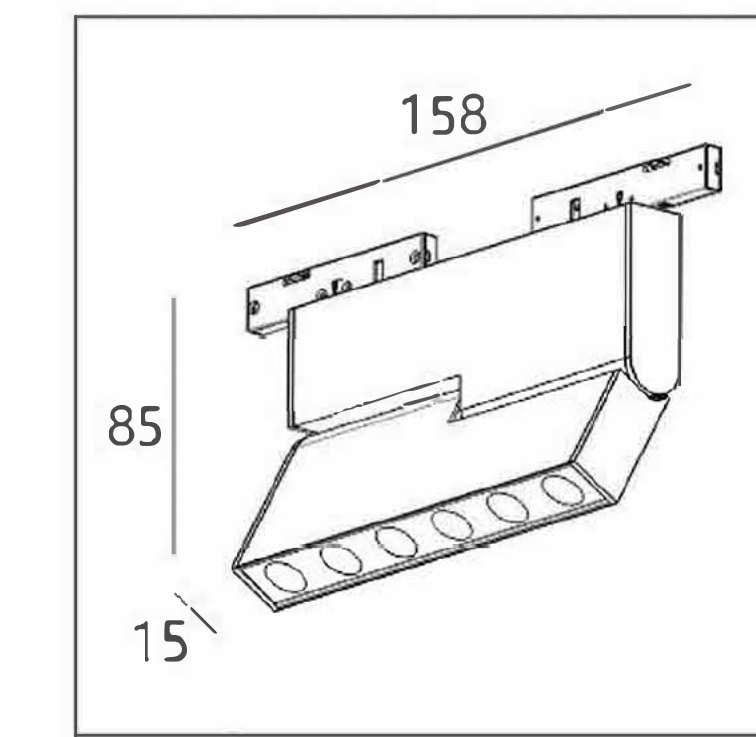

LightSource:
LED

Luminousflux:
221lm

CRI:
Ra > 90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
6W

Outputvoltage:
24V

Outputcurrent:
/


OPTIC:
30°

Mainsvoltage:
DC24V

Description:
Magnetic spot light

Cutout:
/

KLA1512DS

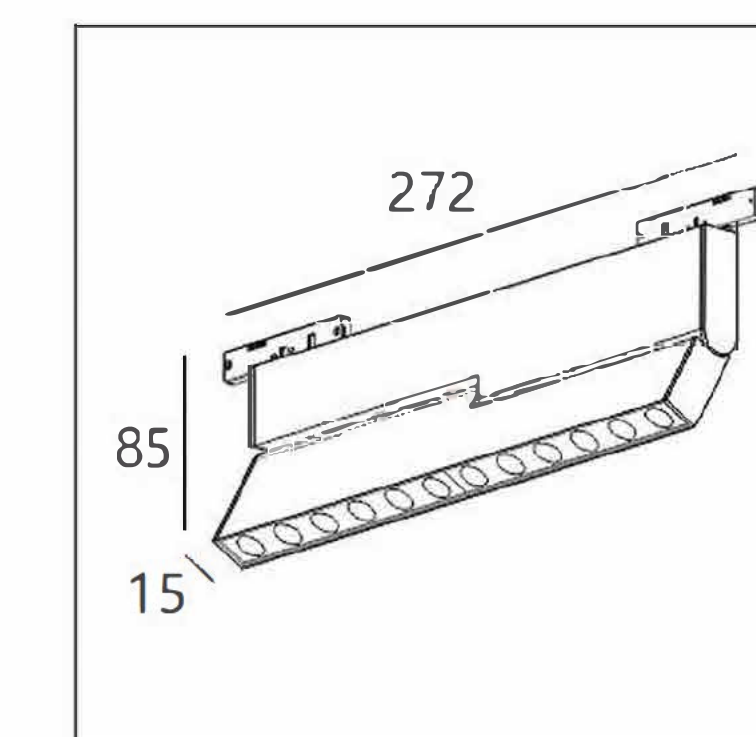

LightSource:
LED

Luminousflux:
430lm

CRI:
Ra > 90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminum

Power:
12W

Outputvoltage:
24V

Outputcurrent:
/

OPTIC:
30°

Mainsvoltage:
DC24V

Description:
Magnetic spot light

Cutout:
/



COLORS




BK

COLORS



BK

Mini
magnet track

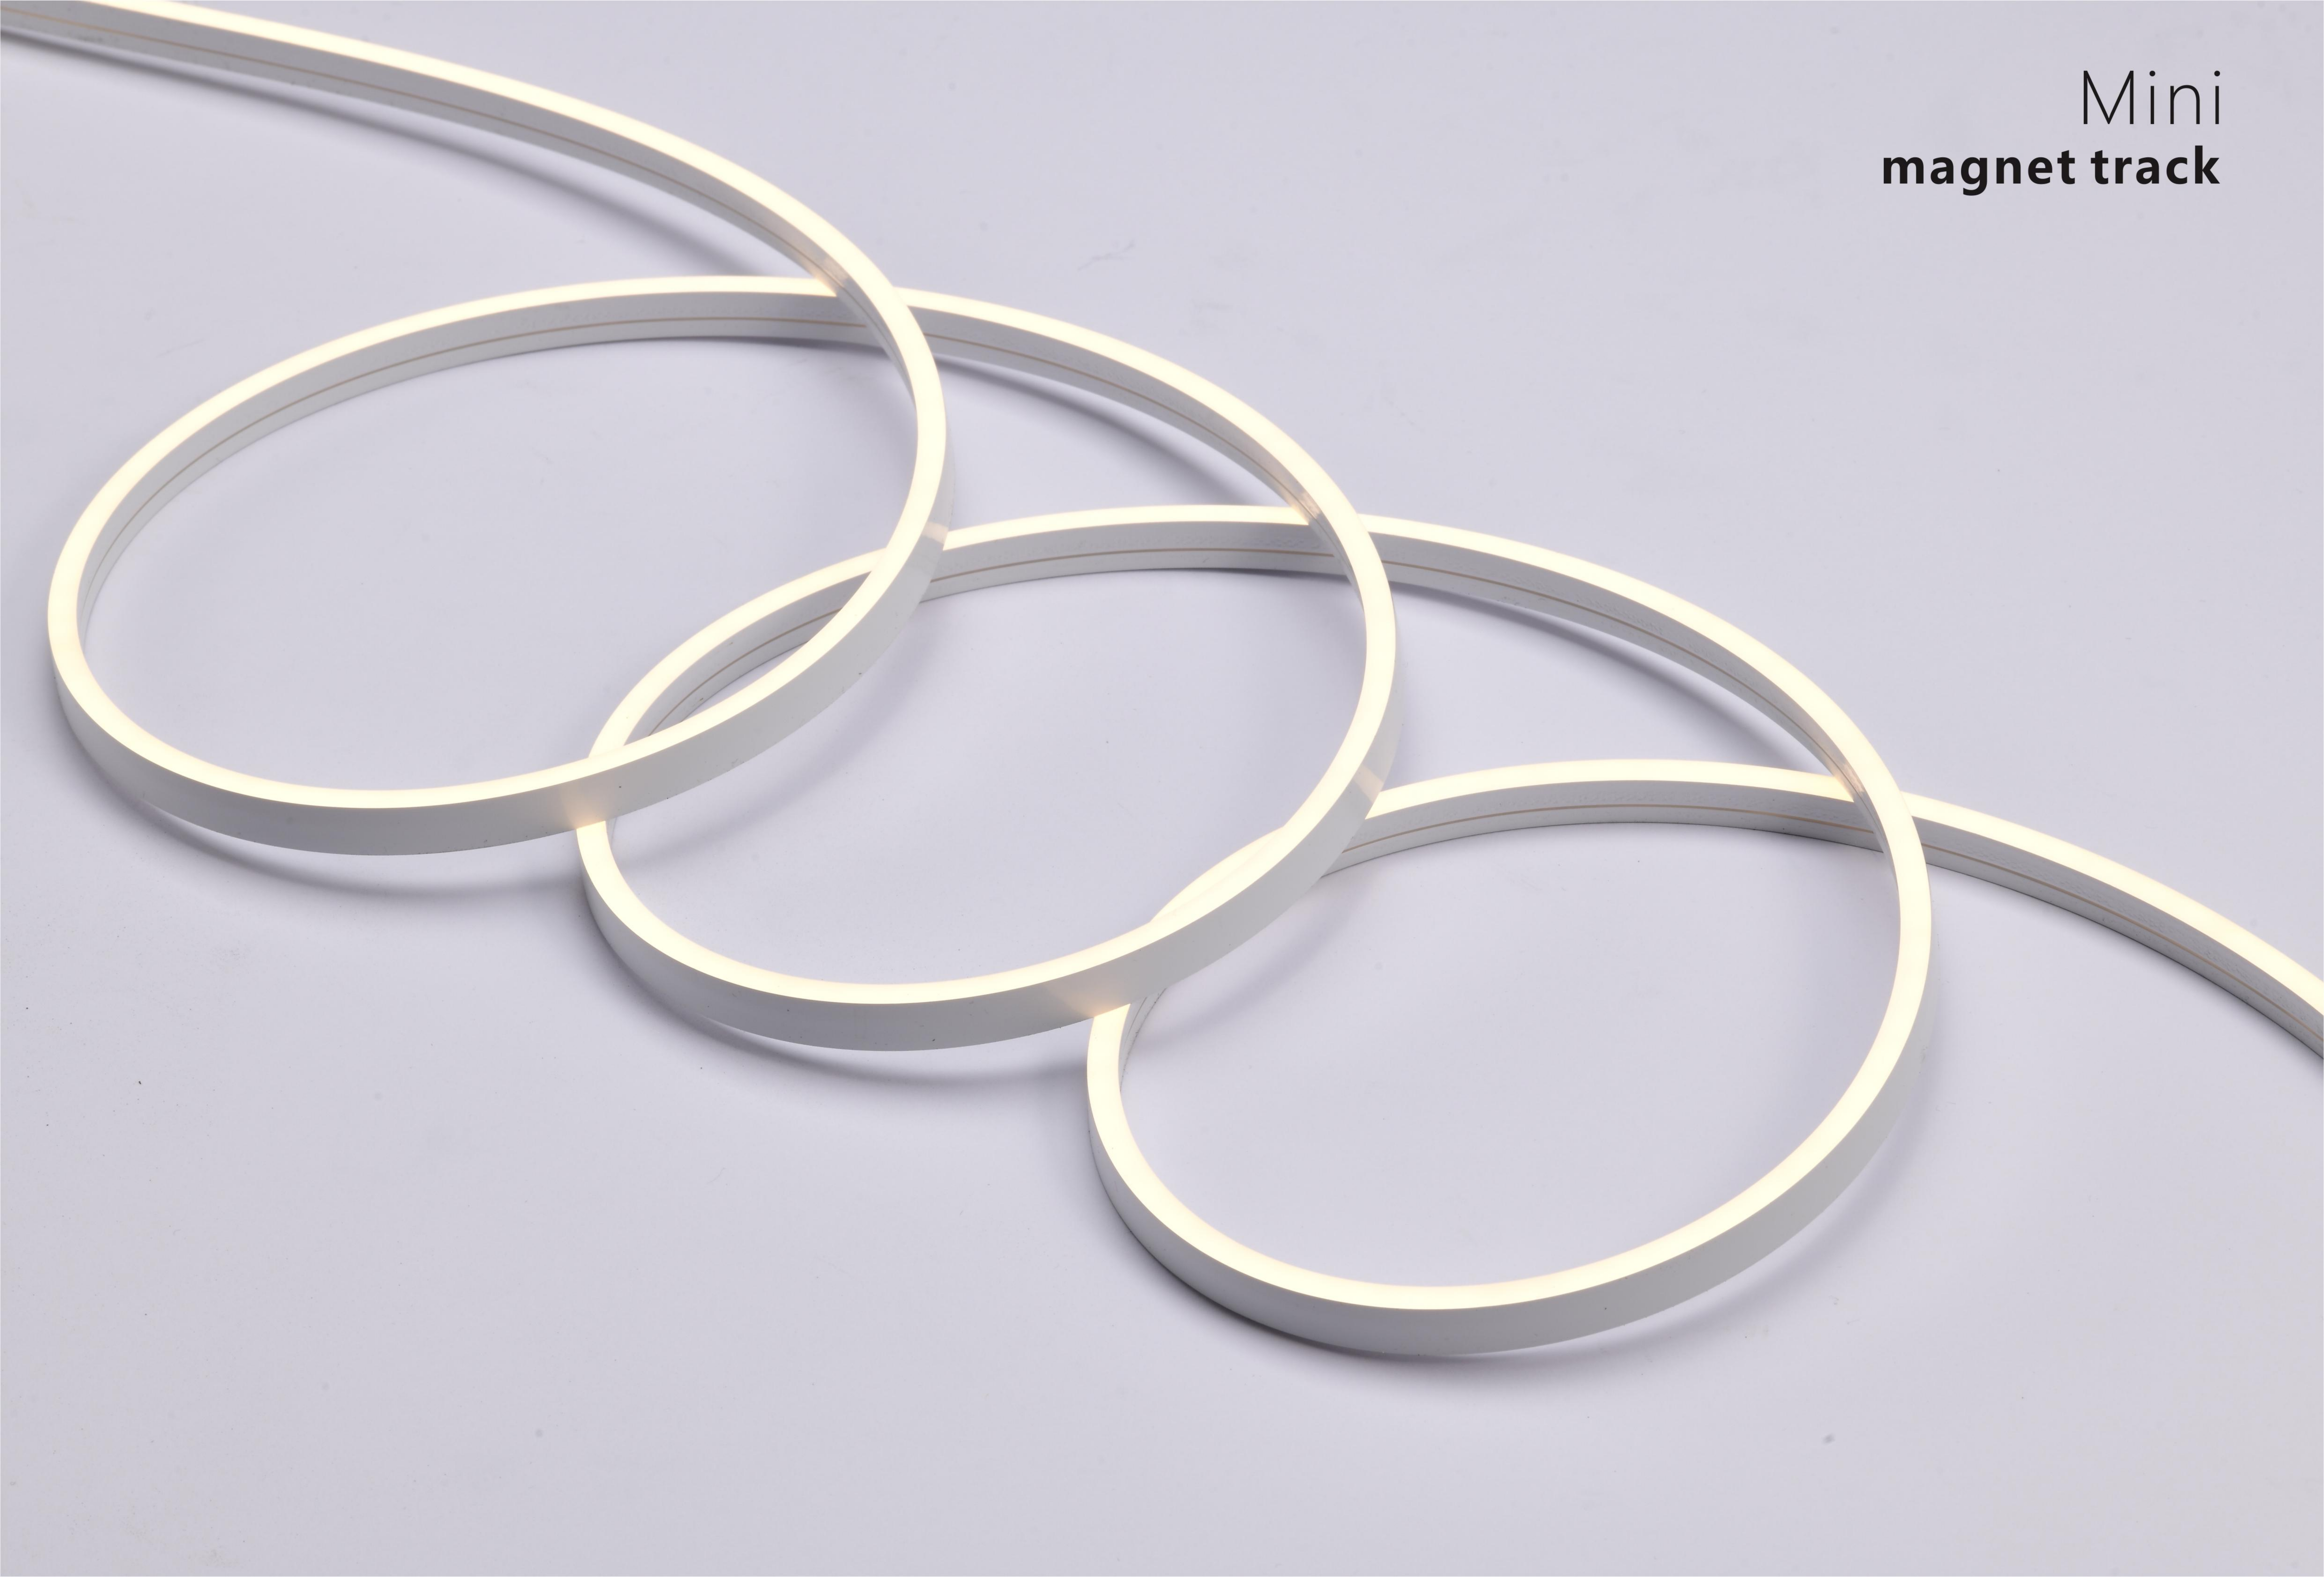



E x t r e m e l y

s l i m

d e s i g n

Mini
magnet track

KYB0501NS

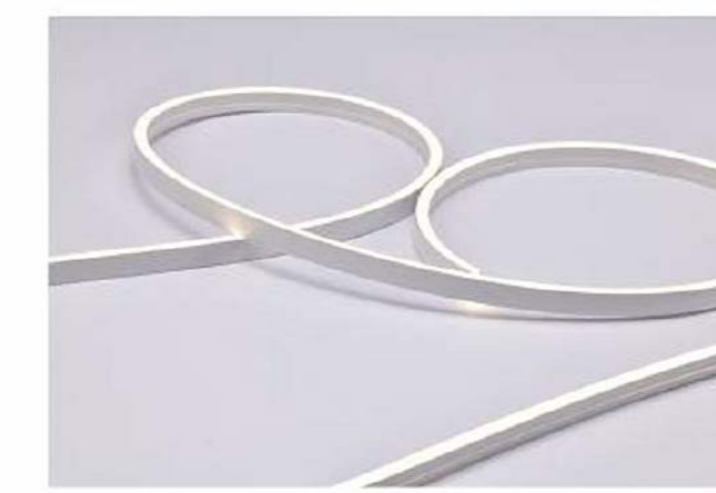

LightSource:
LED

Material:
Silicone

OPTIC:
100°

Luminousflux:
/

Power:
8W

Mainsvoltage:
DC24V

CRI:
Ra>80

Outputvoltage:
24V

Description:
Light Strip

CCT:
3000K

Outputcurrent:
/

Cutout:
/

1000

KYB0502NS



LightSource:
LED

Material:
Silicone

OPTIC:
100°

Luminousflux:
/

Power:
16W

Mainsvoltage:
DC24V

CRI:
Ra>80

Outputvoltage:
24V


Description:
Light Strip

CCT:
3000K

Outputcurrent:
/

Cutout:
/

2000

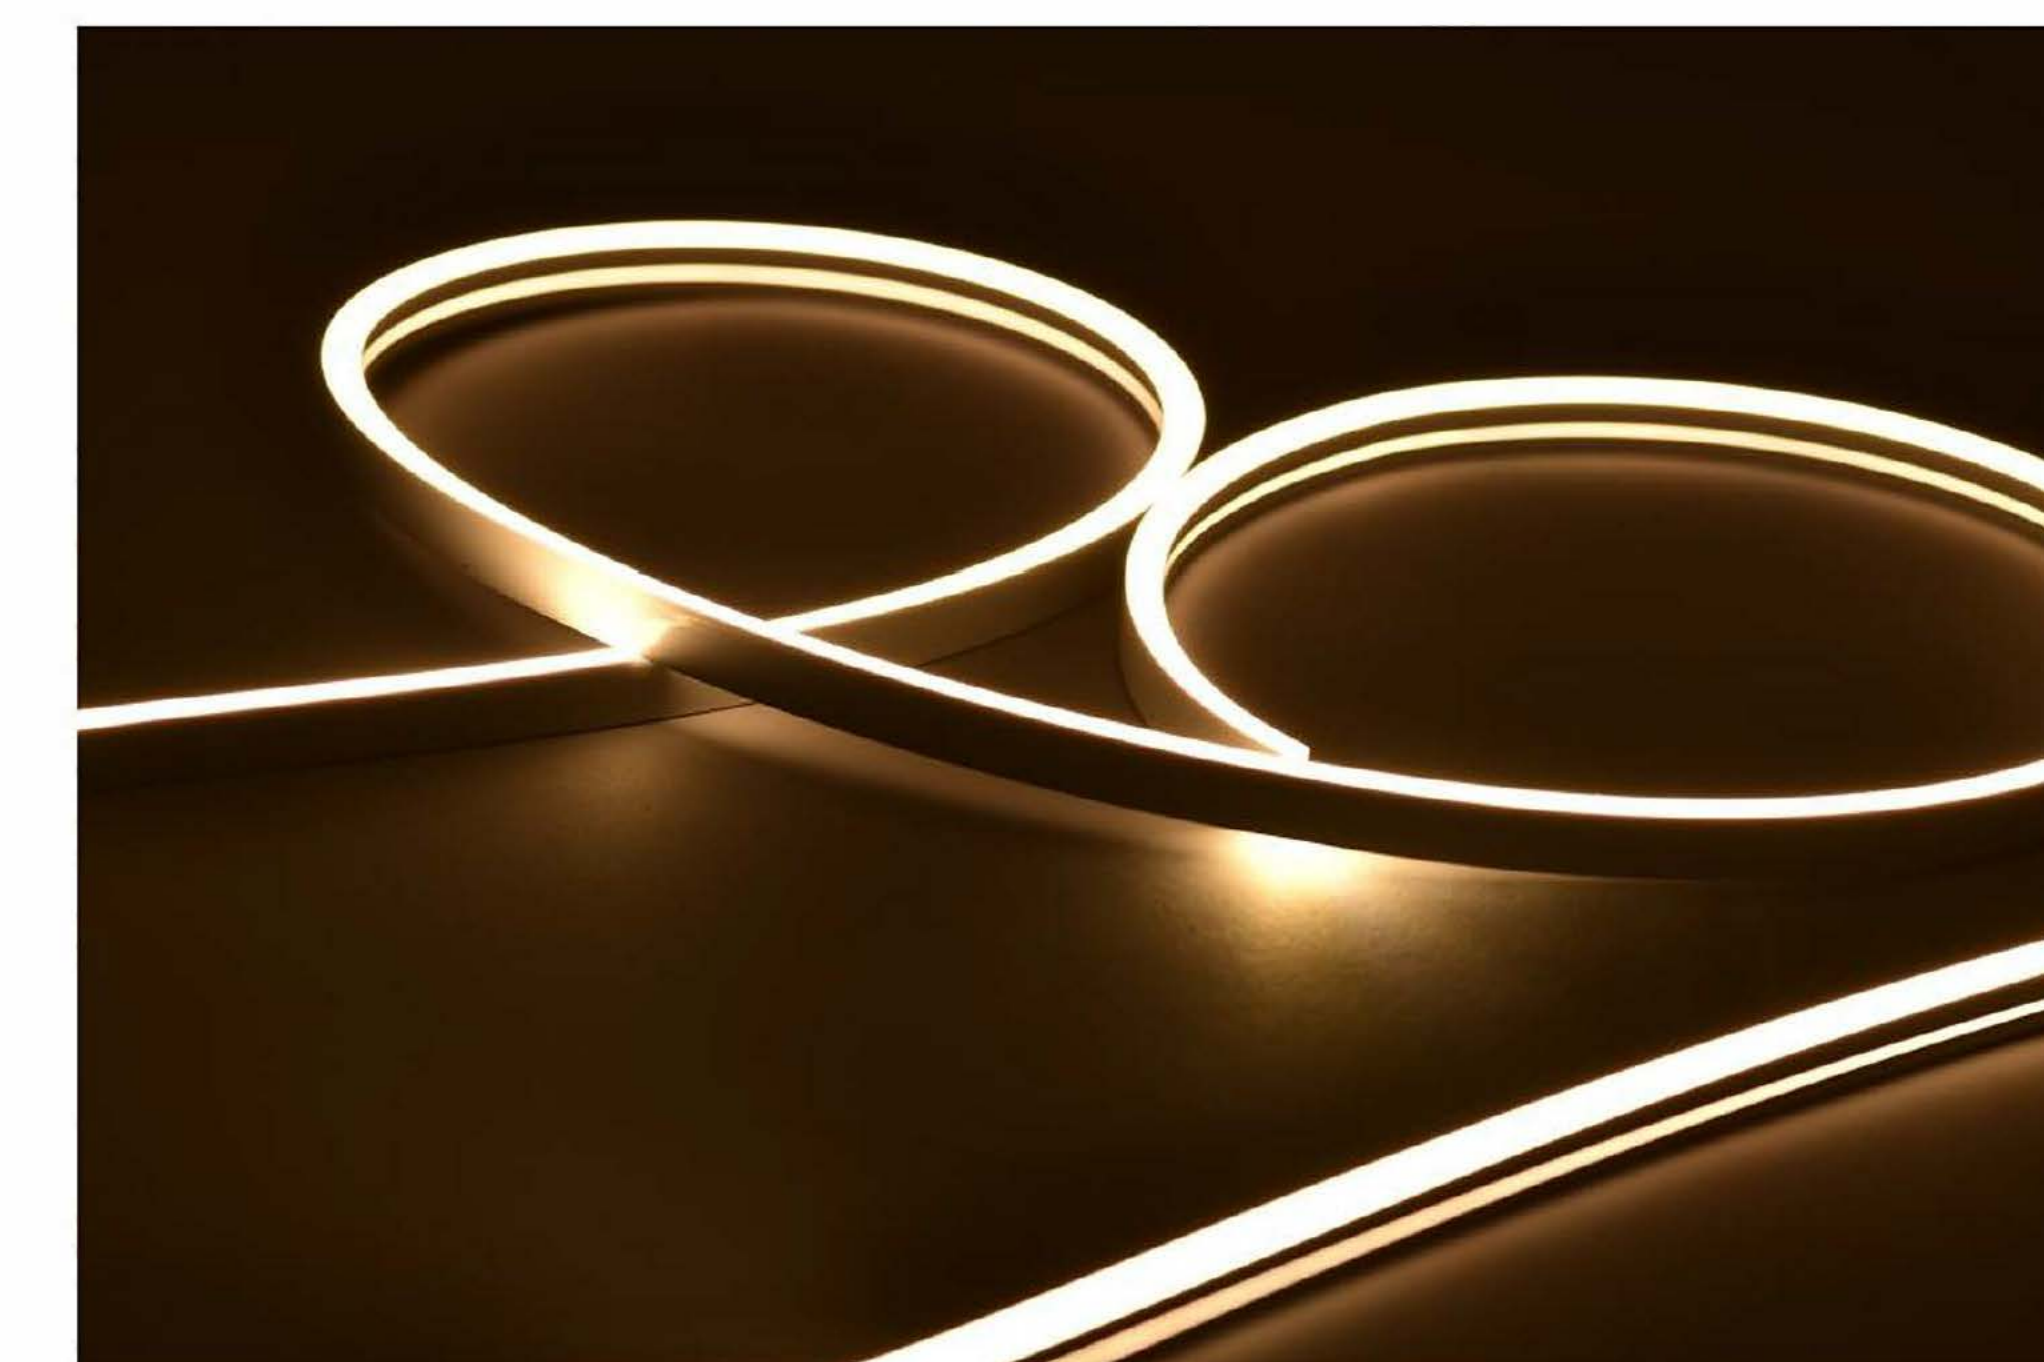

COLORS



WH

MAGNETIC SYSTEM | K05 SERIES

THANK YOU

Nelux Architectural Lighting Products
Whatsapp: +852 5349 0724
sales@nelux.com.hk
www.nelux.com.hk

Head office: China, HK, Wanchai,
Central Plaza, 18 Harbour road, 32/F, Office 3208
Workhouse: China, HK, Tuen Mun, Sun Hing Industrial Building, 22 Kin Fat Street, 11th Floor

Tel:+852 28600042
Fax:+852 28600066
WeChat: neluxury