

nelux

Producing your dreams

Comercial & Architectural LED lighting
Since 2010

Nelux Architectural Lighting Products

Deep spot light

Scan Our QR



Producing Your Dreams

Nelux (HK) Internation,ltd

nelux architectural lighting

18 Harbour road, Central Plaza, 32/F, Office 3208,
Wanchai, HK, China
sales@nelux.com.hk
+852 53490724

neluxury
neluxlighting
www.nelux.com.hk

NELUX (HK) INTERNATIONAL,LTD



NELUX ARCHITECTURAL LIGHTING architectural lighting products

Nelux: Illuminating Excellence for Over Three Decades

With over 32 years of combined experience, Nelux has been at the forefront of the lighting industry, specializing in fixtures for diverse lighting projects. Our journey began with the same enthusiasm and dedication that drives us today. We aim to leverage our extensive expertise to contribute meaningfully to the knowledge and development of lighting solutions, catering specifically to lighting designers, architects, interior designers, and decorators.

Since the establishment of our head office in Hong Kong in 2010, Nelux has developed three primary product lines:

1. **Architectural Lighting Products:** Products to enhance the aesthetic and functional aspects of architectural spaces.
2. **Industrial Lighting:** High quality and Engineered to meet the rigorous demands of industrial environments.
3. **Bespoke Lighting Products:** Custom-designed lighting solutions that include mold management, product design, and the manufacturing of special and unique products in direct collaboration with our suppliers and customers.

Our Expertise


At Nelux, we excel in professional mold product management and oversee the entire production process, specializing in die casting parts, CNC precision machining parts, and custom fabrication parts. Our commitment to quality is unwavering; we conduct thorough inspections and quality control throughout the entire production process.

Our Strength

Our professional team, combined with the most advanced knowledge in lighting, empowers us to provide high-quality products with exceptional precision. We pride ourselves on our ability to deliver the best solutions tailored to your needs.

Custom Solutions

We offer competitive quotes based on your drawings (preferred formats: STEP, DWG, and PDF) within 49 hours. Our goal is to provide you with unparalleled service and products that meet your exact specifications.

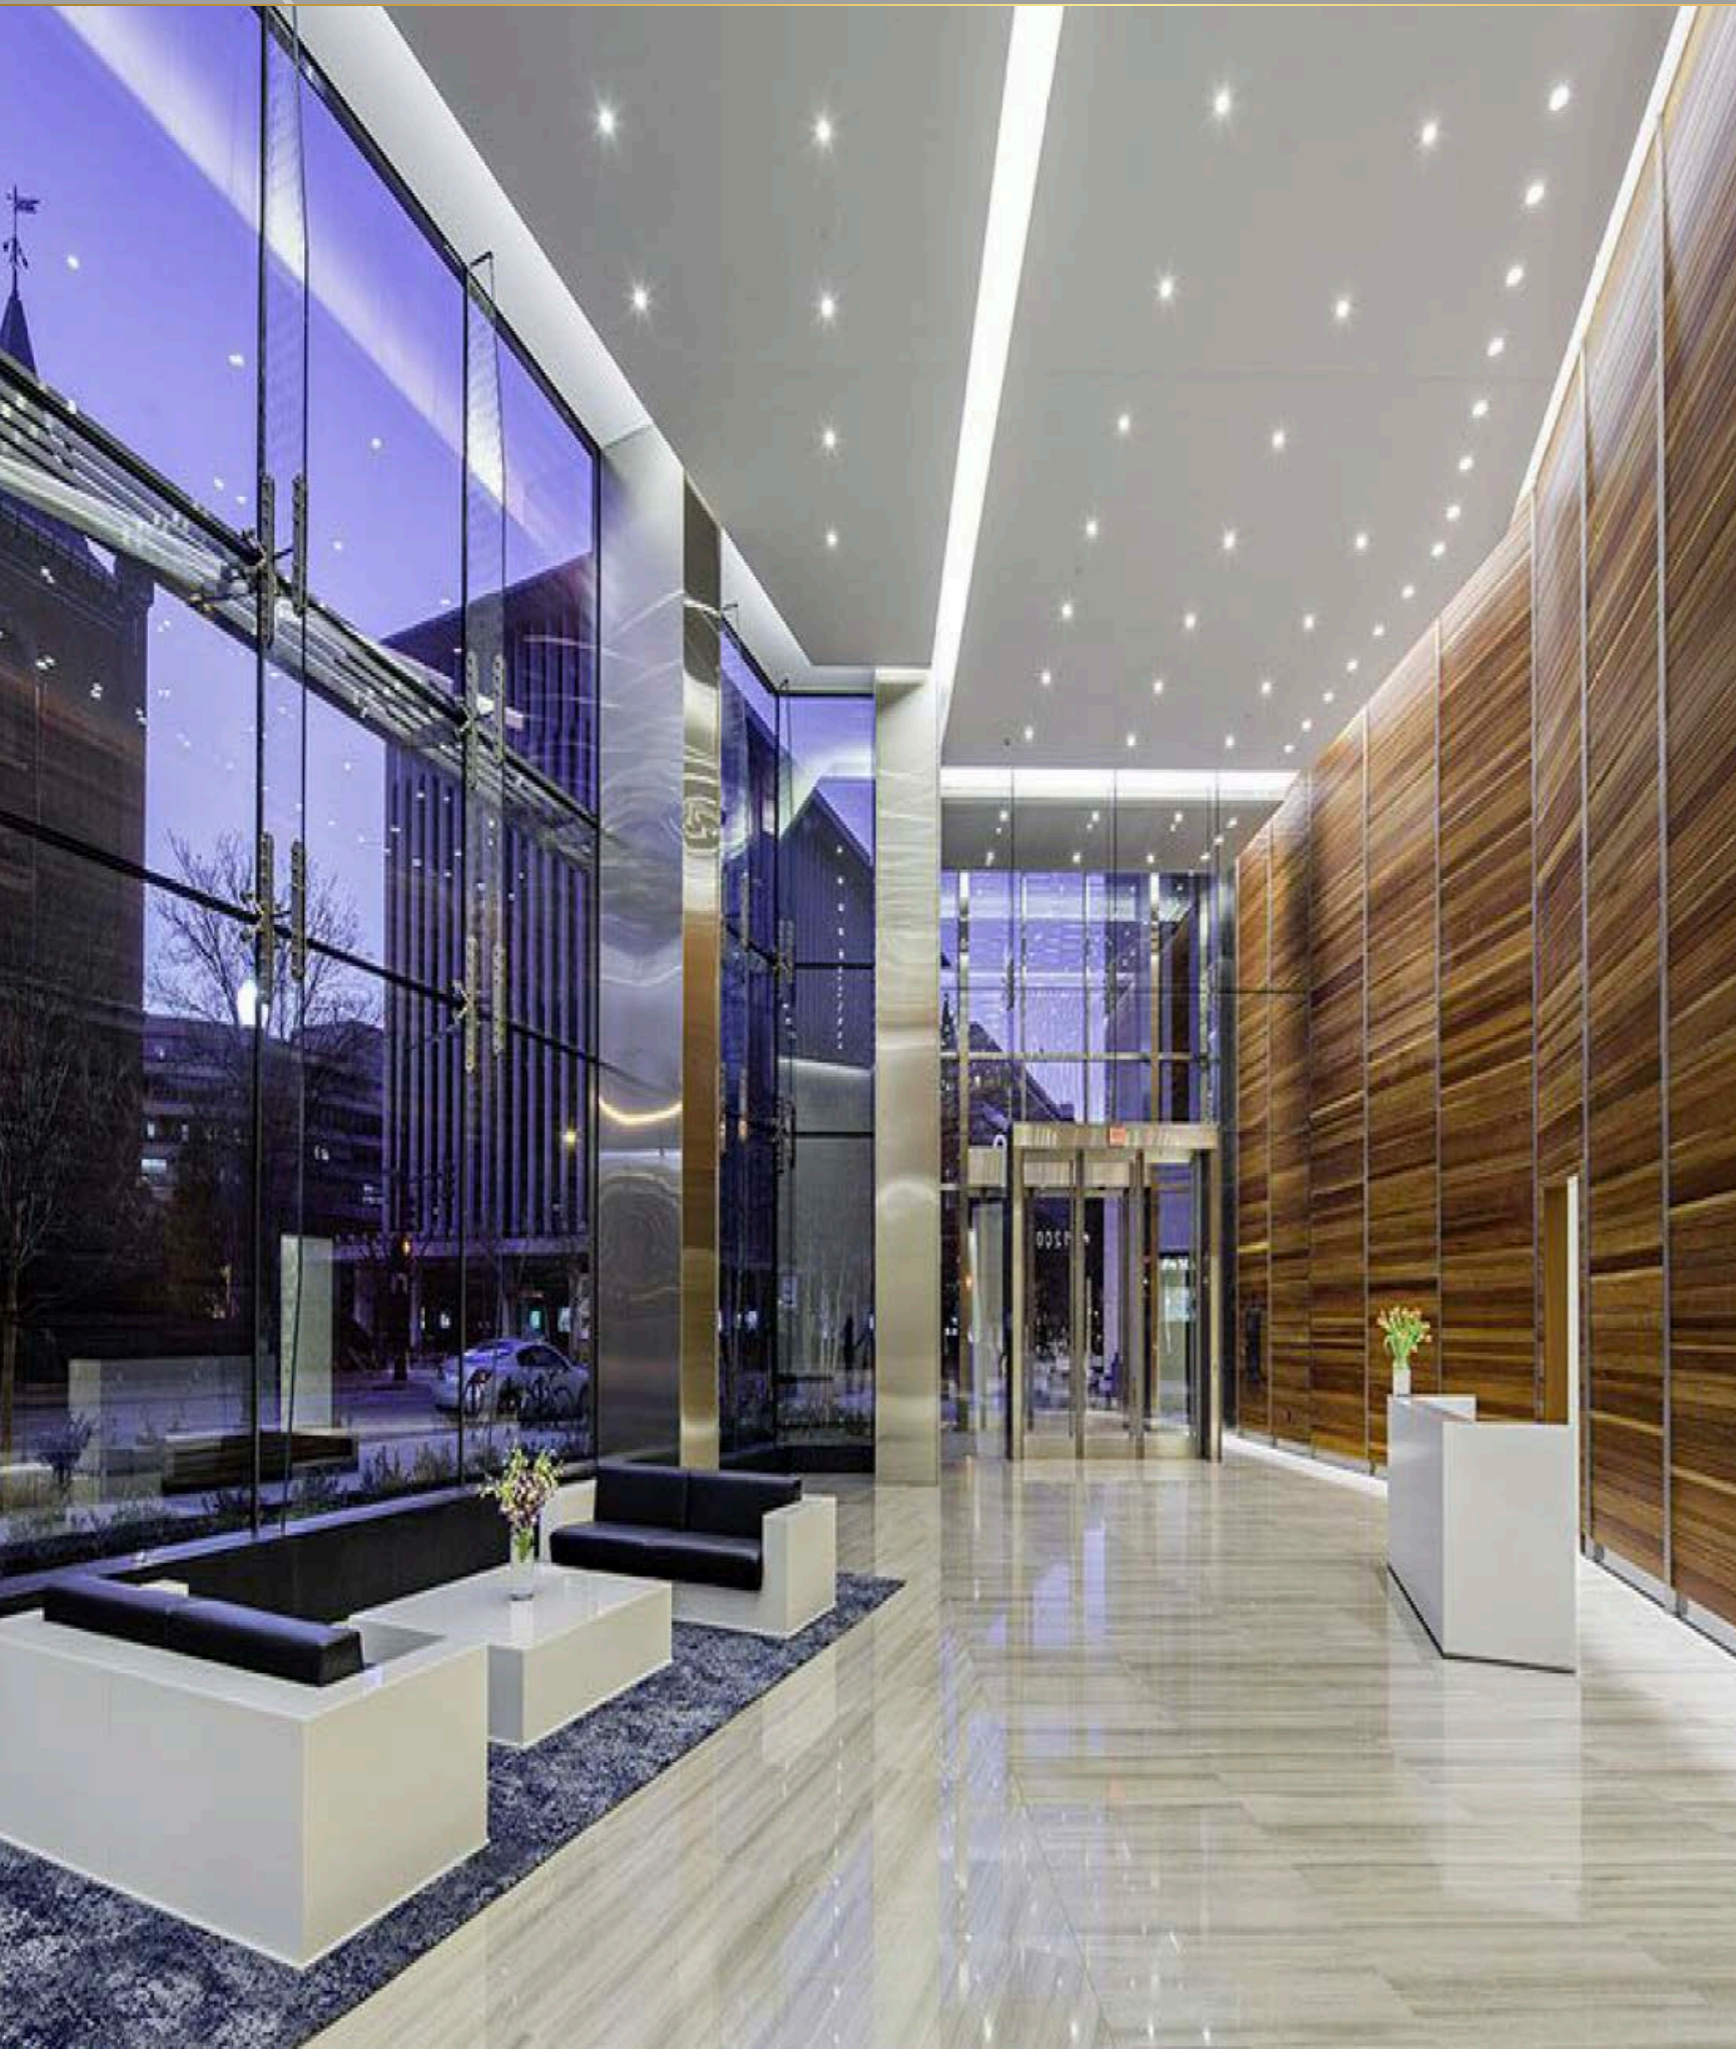

DESIG Deep Spot Light



NR1349 5W




NR1336 10W



NR1350 18W

Inspired from flower rose, an beautiful artistic design. Easy to change different color of reflector.
Light body made from original aluminum, RoHs Reach standard.








NR1349

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
5W	2700K	CREE COB	≥80	24°	432.8 lm
	3000K			36°	408.1 lm
	4000K				
	5000K				

Size/CTN: 565×220×245 mm
G.W./CTN: 5.045 kgs
PCS/CTN: 20 pcs

Light distribution parameters







NR1336

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
10W	2700K	CREE COB	≥80	24°	743.9 lm
	3000K			30°	748.4 lm
	4000K				
	5000K				746.6 lm

Size/CTN: 565×220×245 mm
G.W./CTN: 6.1 kgs
PCS/CTN: 20 pcs

Light distribution parameters







NR1350

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
18W	2700K	CREE COB	≥80	24°	1463.5 lm
	3000K			36°	1459.3 lm
	4000K				
	5000K				1436.8 lm

Size/CTN: 420×390×275 mm
G.W./CTN: 8.935 kgs
PCS/CTN: 18 pcs

Light distribution parameters





VALENZA Deep Spot Light



NR1004 10W



NR1035 10W



NR1238 15W



NR1239 15W



NR1029 10W



NR1030 10W



NR1234 15W



NR1235 15W



NR1031 10W



NR1032 10W



NR1236 15W



NR1237 15W




NR1284 10W



NR1257 15W

Anti-glare function with leds sinking technology, it is less visible to create a good sense of light, create a quiet atmosphere.
 Different IP as options to meet wider applications.
 Light body made from original aluminum, RoHs Reach standard.





NR1004

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
10W	2700K	CREE COB	≥80	15°	536.4lm
	3000K			20°	524.3lm
	4000K			30°	505.5lm
	5000K			40°	424.2lm

Size/CTN: 565×220×245 mm
G.W./CTN: 6.87 kgs
PCS/CTN: 20 pcs

Light distribution parameters


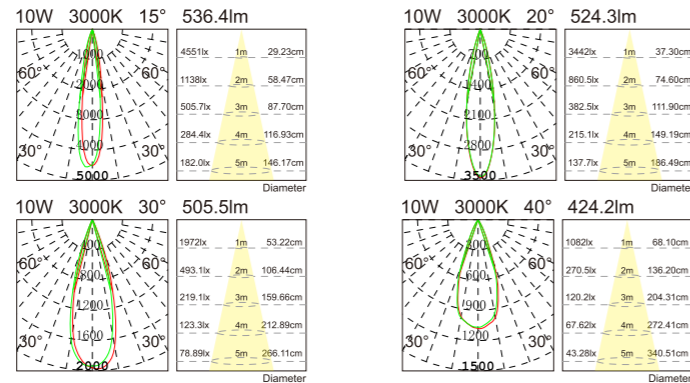



NR1035

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
10W	2700K	CREE COB	≥80	15°	536.4lm
	3000K			20°	524.3lm
	4000K			30°	505.5lm
	5000K			40°	424.2lm

Size/CTN: 565×220×245 mm
G.W./CTN: 7.93 kgs
PCS/CTN: 20 pcs

Light distribution parameters


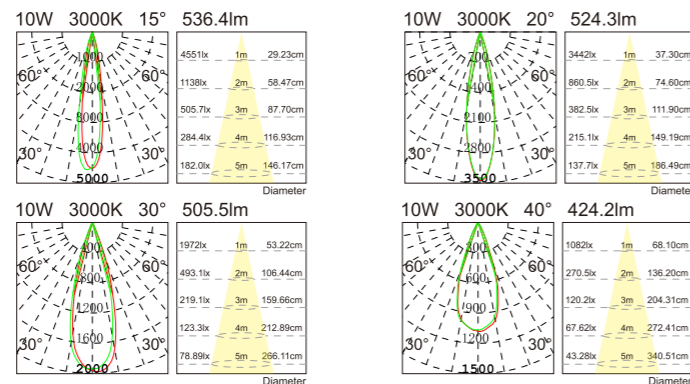



NR1238

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
15W	2700K	CREE COB	≥80	15°	807.3lm
	3000K			20°	800.9lm
	4000K			30°	760.7lm
	5000K			40°	641.2lm

Size/CTN: 420×390×275 mm
G.W./CTN: 8.20 kgs
PCS/CTN: 18 pcs

Light distribution parameters

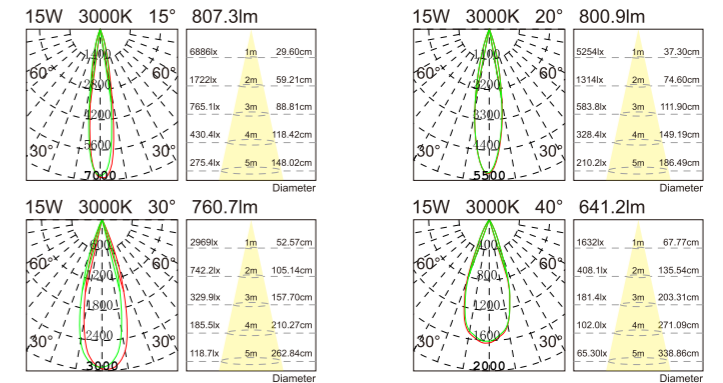



NR1239

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
15W	2700K	CREE COB	≥80	15°	807.3lm
	3000K			20°	800.9lm
	4000K			30°	760.7lm
	5000K			40°	641.2lm

Size/CTN: 420×390×275 mm
G.W./CTN: 8.20 kgs
PCS/CTN: 18 pcs

Light distribution parameters

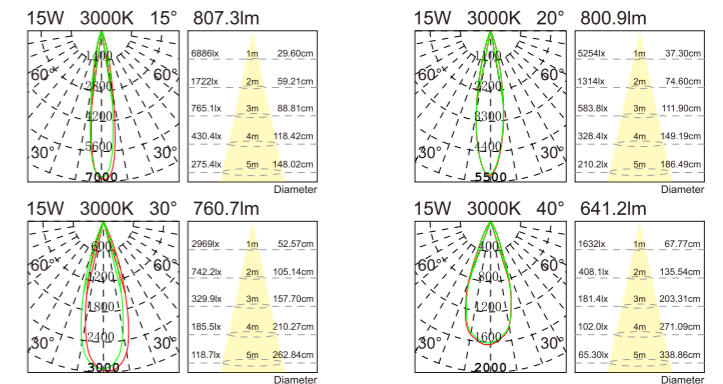






NR1029

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
10W	2700K 3000K 4000K 5000K	CREE COB	≥80	24°	666.7lm

Size/CTN: 540×210×185 mm
G.W./CTN: 6.08 kgs
PCS/CTN: 20 pcs

Light distribution parameters






NR1234

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
15W	2700K 3000K 4000K 5000K	CREE COB	≥80	24°	1016.0lm

Size/CTN: 420×390×275 mm
G.W./CTN: 7.93 kgs
PCS/CTN: 18 pcs

Light distribution parameters






NR1030

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
10W	2700K 3000K 4000K 5000K	CREE COB	≥80	24°	666.7lm

Size/CTN: 540×210×185 mm
G.W./CTN: 6.08 kgs
PCS/CTN: 20 pcs

Light distribution parameters





NR1235

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
15W	2700K 3000K 4000K 5000K	CREE COB	≥80	24°	1016.0lm

Size/CTN: 420×390×275 mm
G.W./CTN: 7.93 kgs
PCS/CTN: 18 pcs

Light distribution parameters








NR1031

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
10W	2700K	CREE COB	≥80	24°	847.0lm
	3000K			36°	843.0lm
	4000K			60°	750.4lm
	5000K				

Size/CTN: 565×220×245 mm
G.W./CTN: 6.1 kgs
PCS/CTN: 20 pcs

Light distribution parameters



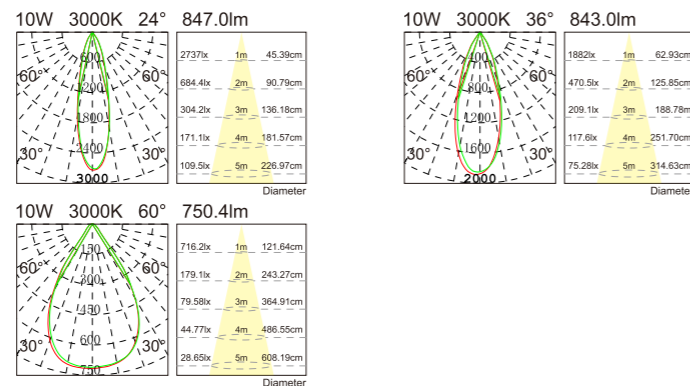


NR1032

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
10W	2700K	CREE COB	≥80	24°	847.0lm
	3000K			36°	843.0lm
	4000K			60°	750.4lm
	5000K				

Size/CTN: 565×220×245 mm
G.W./CTN: 6.1 kgs
PCS/CTN: 20 pcs

Light distribution parameters



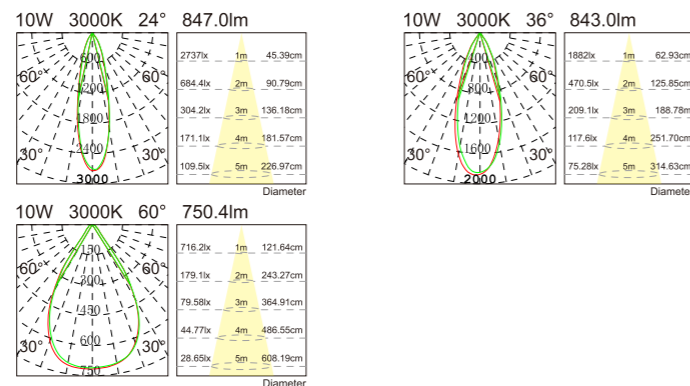


NR1236

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
15W	2700K	CREE COB	≥80	24°	1295.5lm
	3000K			36°	1246.9lm
	4000K			60°	1118.1lm
	5000K				

Size/CTN: 420×390×275 mm
G.W./CTN: 7.03 kgs
PCS/CTN: 18 pcs

Light distribution parameters


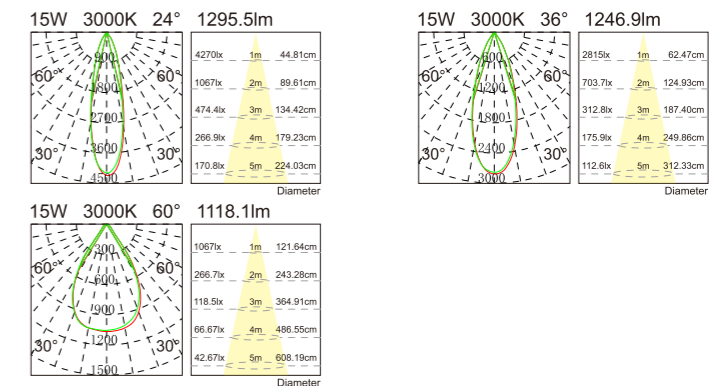



NR1237

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
15W	2700K	CREE COB	≥80	24°	1295.5lm
	3000K			36°	1246.9lm
	4000K			60°	1118.1lm
	5000K				

Size/CTN: 420×390×275 mm
G.W./CTN: 8.20 kgs
PCS/CTN: 18 pcs

Light distribution parameters

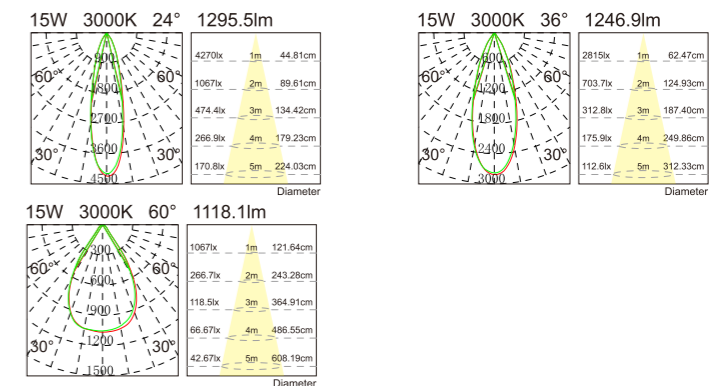






NR1284

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
10W	2700K	CREE COB	≥80	15°	683.8lm
	3000K			24°	673.5lm
	4000K			38°	683.7lm
	5000K				

Size/CTN: 390×390×245 mm
G.W./CTN: 6.422 kgs
PCS/CTN: 18 pcs

Light distribution parameters

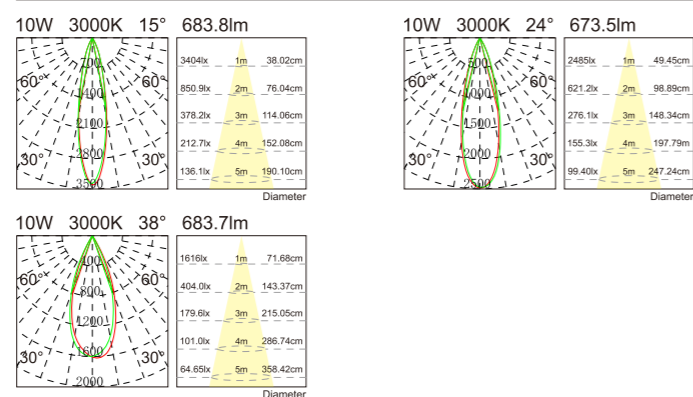

NR1257

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
15W	2700K	CREE COB	≥80	15°	1042.1lm
	3000K			24°	1034.7lm
	4000K			38°	1049.8lm
	5000K				

Size/CTN: 420×390×275 mm
G.W./CTN: 7.97 kgs
PCS/CTN: 18 pcs

Light distribution parameters

