

nelux
PRODUCING YOUR DREAMS

nelux
Producing your dreams

2025

NELUX ARCHITECTURAL LIGHTING - LED RECESSED SPOT LIGHT 2025

LED Surface Luminaires and Spot light

Nelux Architectural Lighting Products
Whatsapp: +852 5349 0724
sales@nelux.com.hk
www.nelux.com.hk

Head office: China, HK, Wanchai,
Central Plaza, 18 Harbour road, 32/F, Office 3208
Workhouse: China, HK, Tuen Mun, Sun Hing Industrial Building, 22 Kin Fat Street, 11th Floor

Tel:+852 28600042
Fax:+852 28600066
WeChat: neluxury

ARCHITECTURAL & COMMERCIAL LIGHTING

**NELUX CUSTOMISING NELUX
PRODUCTOS A MEDIDA**



**NELUX MODERN DESIGN
REDECORATE YOUR SPACE**

SMART
MODERN
FORM
+
LONG
LIFESPAN
+
LIGHTING
SOLUTIONS

ABOUT US

13 years ago a group of us bonded together with the bright idea to bring unique design and top quality led lighting system to market. All for architectural and commercial lighting products reflect the core of modularity, convenience and affordability.

Nelux a tech-style luminaire firm that focuses on innovation. These innovation based on our deep cooperation with lighting designers, we know what you need, we know how to bring a better lighting in your space.

Working with us comes with some awesome perks

INNOVATIVE TECHNOLOGY:

With years deep communication with designers, We continuously strive to bring the latest lighting components and technological innovations to LED lighting products

COMPREHENSIVE DATASHEET SUPPORT:



In Nelux, we always think about how to help our customers finish their work, see what we can do for you, Lighting design, IES Files, High resolution photos, You just sent us DWG file, we will work for you with a experience team

CUSTOMIZATION:


With a wide variety of marketing content from catalogue choose, if customers still need a special or unique design for lighting, our global sales team will work with you to user in a customization lighting solution for your customers.




CLAN S SERIES-LUMINAIRES

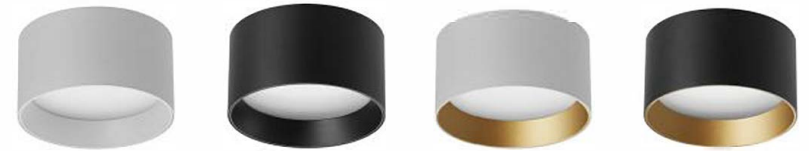

8W



12W



15W


Code	Power	Lumen	Beam angle	CCT	CRI
NL0812H-8W	8W	3000K: 635.65Lm 4000K: 655.24Lm 5000K: 670.55Lm	80°	3000K 4000K 6000K	≥ 80 ≥ 90
NL0812H-12W	12W	3000K: 957.25Lm 4000K: 984.26Lm 5000K: 1002.8Lm	80°	3000K 4000K 6000K	≥ 80 ≥ 90
NL0812H-15W	15W	3000K: 1139.36Lm 4000K: 1186.12Lm 5000K: 1210.13Lm	80°	3000K 4000K 6000K	≥ 80 ≥ 90

ErP CE CB RoHS IES file


Dimmable: 0-10V TRIAC




CLAN S SERIES-LUMINAIRES



8W



12W




15W


Code	Power	Lumen	Beam angle	CCT	CRI
NL0812-8W	8W	3000K:685.99Lm 4000K:701.97Lm 5000K:713.55Lm	110°	3000K 4000K 6000K	≥ 80 ≥ 90
NL0812-12W	12W	3000K:1080.25Lm 4000K:1105.76Lm 5000K:1128.25Lm	110°	3000K 4000K 6000K	≥ 80 ≥ 90
NL0812-15W	15W	3000K:1335.93 Lm 4000K:1376.25Lm 5000K:1389.68Lm	110°	3000K 4000K 6000K	≥ 80 ≥ 90

ErP CE CB RoHS IES file


Dimmable: 0-10V



9W



15W

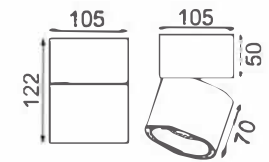


24W


Code	Power	Lumen	Beam angle	CCT	CRI
NL0833C-9W	9W	3000K: 753.29Lm 4000K: 771.31Lm 5000K: 779.45Lm	15° 24° 38°	3000K 4000K 5000K	≥ 90
NL0833C-15W	15W	3000K: 1250.31Lm 4000K: 1283.49Lm 5000K: 1293.33Lm	15° 24° 38°	3000K 4000K 5000K	≥ 90
NL0833C-24W	24W	3000K: 2005.36Lm 4000K: 2058.46Lm 5000K: 2098.53Lm	15° 24° 38°	3000K 4000K 5000K	≥ 90

ErP CE CB RoHS IES file


Dimmable: TRIAC



9W





15W

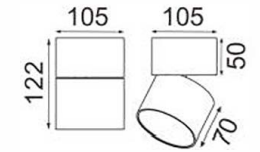


24W


Code	Power	Lumen	Beam angle	CCT	CRI
NL0833D-9W	9W	3000K: 716.53Lm 4000K: 734.26Lm 5000K: 745.31Lm	110°	3000K 4000K 5000K	≥ 80 ≥ 90
NL0833D-15W	15W	3000K: 1195.32Lm 4000K: 1225.28Lm 5000K: 1235.29Lm	110°	3000K 4000K 5000K	≥ 80 ≥ 90
NL0833D-24W	24W	3000K: 1895.50Lm 4000K: 1945.35Lm 5000K: 1955.60Lm	110°	3000K 4000K 5000K	≥ 80 ≥ 90

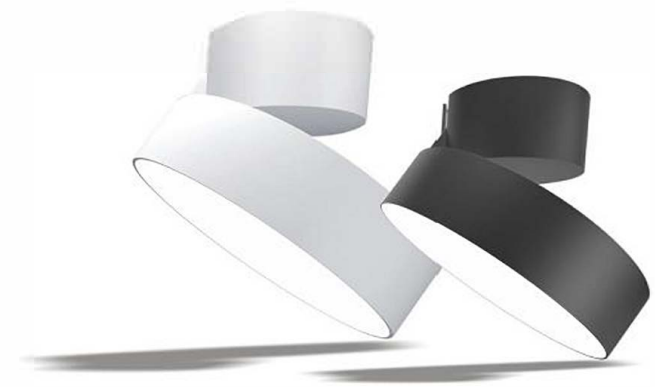

15W



20W

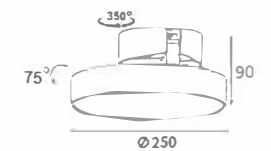

30W

Code	Power	Lumen	Beam angle	CCT	CRI
NL0291-15W	15W	3000K: 1273.28Lm 4000K: 1293.85Lm 5000K: 1305.46Lm	110°	3000K 4000K 5000K	≥ 80 ≥ 90
NL0291-20W	20W	3000K: 1698.23Lm 4000K: 1719.56Lm 5000K: 1723.49Lm	110°	3000K 4000K 5000K	≥ 80 ≥ 90
NL0291-30W	30W	3000K: 2543.32Lm 4000K: 2590.43Lm 5000K: 2560.49Lm	110°	3000K 4000K 5000K	≥ 80 ≥ 90

ErP CE CB RoHS IES file

Dimmable: TRIAC




CLAN S SERIES-SPOT LIGHT

2 specifications



Ø45
7W



Ø55
12W

3 colors




White



Black



Golden

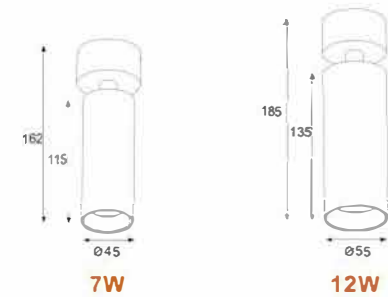


Code	Power	Lumen	Beam angle	CCT	CRI
NL80018A-7W	7W	3000K:1039.79Lm	15°	3000K	≥ 90
		4000K:1056.26Lm	24°	4000K	
		5000K:1068.73Lm	38°	5000K	
NL80018A-12W	12W	3000K:1039.79Lm	15°	3000K	≥ 90
		4000K:1056.26Lm	24°	4000K	
		5000K:1068.73Lm	38°	5000K	

ErP CE CB  RoHS  IES file




CLAN S SERIES-SPOT LIGHT

2 specifications



Ø45
7W



Ø55
12W

3 colors




White



Black



Golden

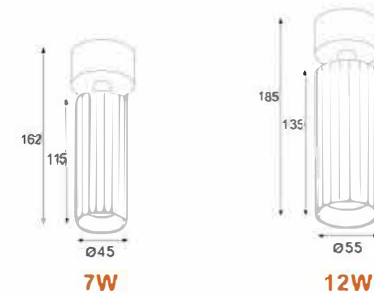


Code	Power	Lumen	Beam angle	CCT	CRI
NL80019A-7W	7W	3000K:511.74Lm	15°	3000K	≥ 90
		4000K:524.91Lm	24°	4000K	
		5000K:528.53Lm	38°	5000K	
NL80019A-12W	12W	3000K:1093.49Lm	15°	3000K	≥ 90
		4000K:1120.67Lm	24°	4000K	
		5000K:1128.64Lm	38°	5000K	


ErP CE CB RoHS IES file



CLAN S SERIES-SPOT LIGHT



8W




12W


Code	Power	Lumen	Beam angle	CCT	CRI
NL0616B-8W	8W	3000K: 710.23Lm	15°	3000K	≥ 90
		4000K: 727.95Lm	24°	4000K	
		5000K: 735.33Lm	38°	5000K	
NL0616B-12W	12W	3000K: 1059.36Lm	15°	3000K	≥ 90
		4000K: 1085.82Lm	24°	4000K	
		5000K: 1101.28Lm	38°	5000K	

ErP CE CB RoHS IES file

Dimmable: TRIAC

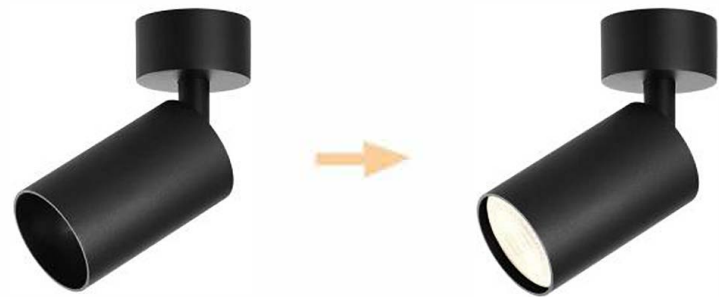

Available as GU10 lighting cup

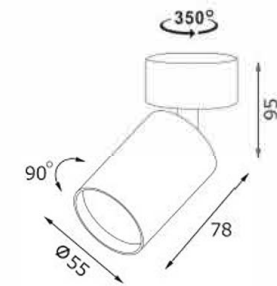

NL0616A-GU10

THANK YOU

NELUX (HK) INTERNATIONAL,TLD

sales@nelux.com.hk

Head Office +852 28600042

Workhouse whatsapp +852 5349 0724