

nelux

Producing your dreams

Comercial & Architectural LED lighting
Since 2010

Nelux Architectural Lighting Products

SURFI SURFACE MOUNTED

Scan Our QR



Producing Your Dreams

Nelux (HK) Internation,ltd

nelux architectural lighting

18 Harbour road, Central Plaza, 32/F, Office 3208,
Wanchai, HK, China
sales@nelux.com.hk
+852 53490724

neluxury
neluxlighting
www.nelux.com.hk

Surfi Surface mounted



SURFI Surface Down Light



NC1023 10W



NC1025 10W



NC1024 15W



NC1026 15W



NC1029 10W



NC1031 10W



NC1030 15W



NC1032 15W



NC1036 30W



NC1037 15W



NC1038 10W



NC1083 10W



NC1079 15W/20W



NC1080 30W



NC1084 40W

Light body made from original aluminum, RoHs Reach standard.
 Driver built in, easy to install.
 Uniform light performance due to control LEDs in CRI and SDCM.





NC1023

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
10W	2700K	CREE COB	≥80	25°	644.2lm
	3000K			40°	615.6lm
	4000K			50°	623.0lm
	5000K				

Size/CTN: 480×450×275 mm
G.W./CTN: 11.5 kgs
PCS/CTN: 18 pcs

Light distribution parameters


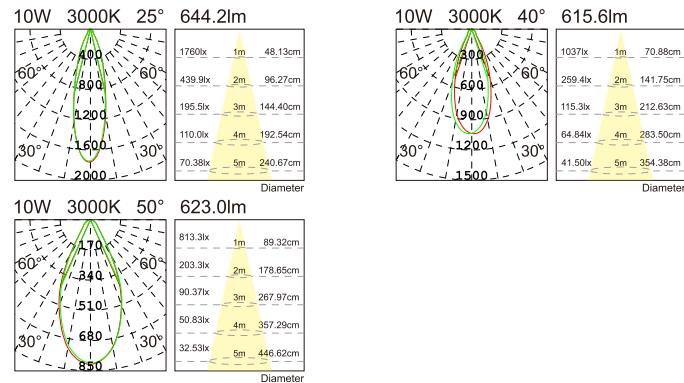


NC1024

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
15W	2700K	CREE COB	≥80	25°	995.0lm
	3000K			40°	945.1lm
	4000K			50°	934.3lm
	5000K				

Size/CTN: 480×450×335 mm
G.W./CTN: 13.8 kgs
PCS/CTN: 18 pcs

Light distribution parameters


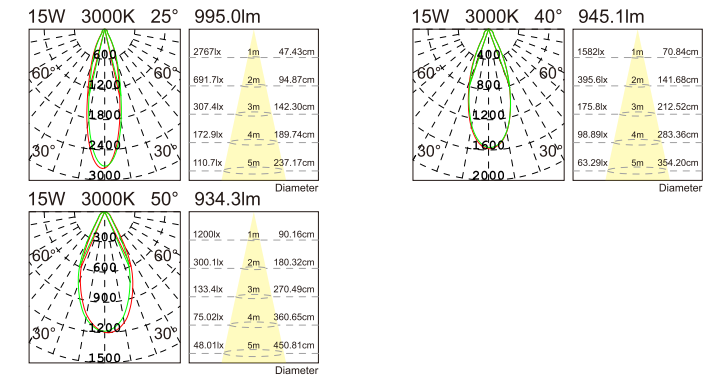


NC1025

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
10W	2700K	CREE COB	≥80	25°	636.2lm
	3000K			40°	617.4lm
	4000K			50°	624.0lm
	5000K				

Size/CTN: 480×450×275 mm
G.W./CTN: 14.4 kgs
PCS/CTN: 18 pcs

Light distribution parameters


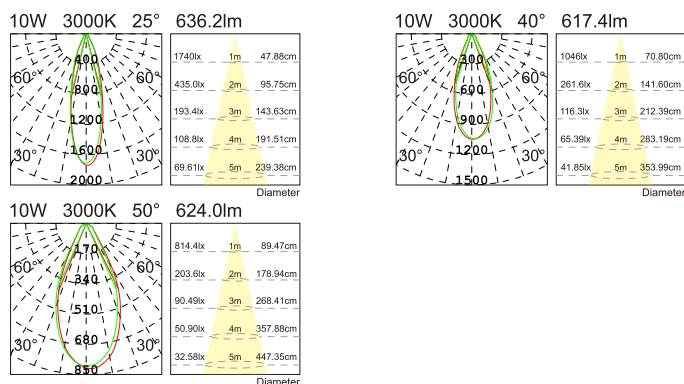


NC1026

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
15W	2700K	CREE COB	≥80	25°	982.2lm
	3000K			40°	937.8lm
	4000K			50°	943.4lm
	5000K				

Size/CTN: 480×450×335 mm
G.W./CTN: 16.1 kgs
PCS/CTN: 18 pcs

Light distribution parameters

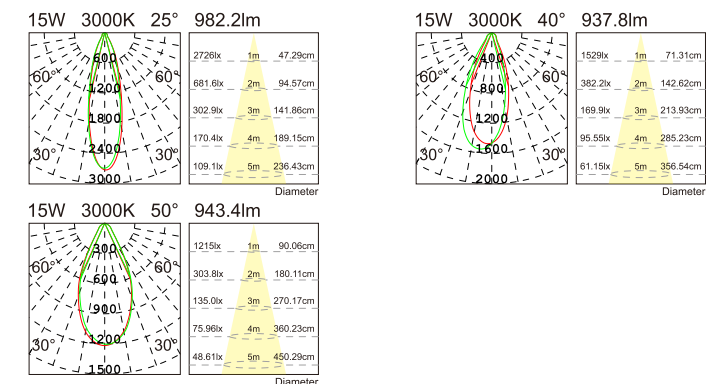





NC1029

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
10W	2700K	CREE COB	≥80	15°	874.5lm
	3000K			24°	874.2lm
	4000K			38°	872.7lm
	5000K			60°	864.4lm

Size/CTN: 480×450×275 mm
G.W./CTN: 11.86 kgs
PCS/CTN: 18 pcs

Light distribution parameters

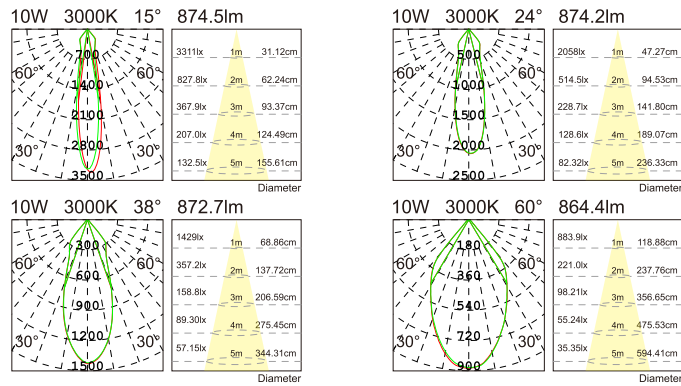



NC1031

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
10W	2700K	CREE COB	≥80	15°	762.5lm
	3000K			24°	757.3lm
	4000K			38°	756.0lm
	5000K			60°	737.7lm

Size/CTN: 480×450×275 mm
G.W./CTN: 14.76 kgs
PCS/CTN: 18 pcs

Light distribution parameters

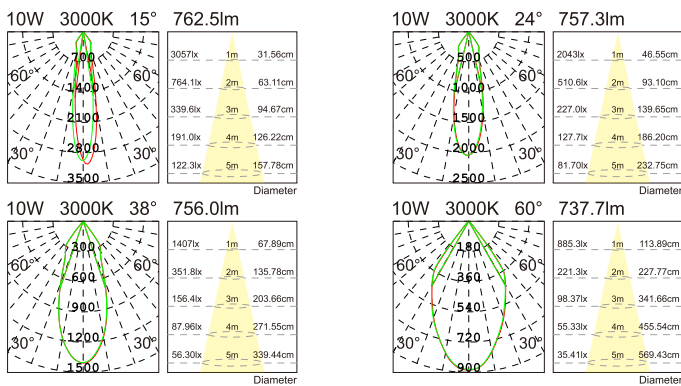



NC1030

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
15W	2700K	CREE COB	≥80	15°	932.0lm
	3000K			24°	902.4lm
	4000K			38°	928.1lm
	5000K			60°	892.6lm

Size/CTN: 480×450×335 mm
G.W./CTN: 14.16 kgs
PCS/CTN: 18 pcs

Light distribution parameters

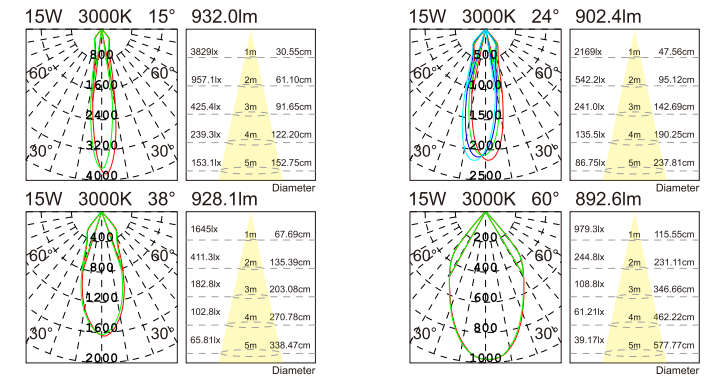



NC1032

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
15W	2700K	CREE COB	≥80	15°	891.5lm
	3000K			24°	895.7lm
	4000K			38°	870.7lm
	5000K			60°	852.0lm

Size/CTN: 480×450×335 mm
G.W./CTN: 16.46 kgs
PCS/CTN: 18 pcs

Light distribution parameters

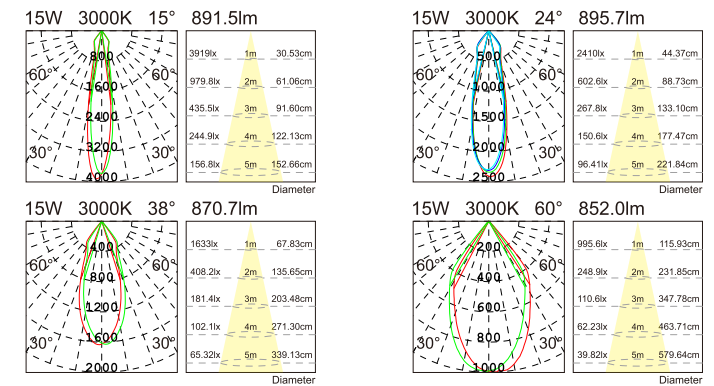





NC1036

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
30W	2700K	Samsung 3535	≥90	15°	1930.2lm
	3000K			30°	2169.7lm
	4000K			45°	1959.9lm

Size/CTN: 465×465×235 mm
G.W./CTN: 13.18 kgs
PCS/CTN: 8 pcs

Light distribution parameters


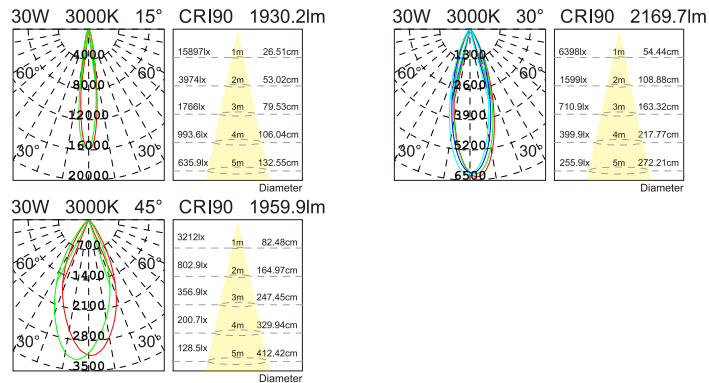


NC1037

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
15W	2700K	Samsung 3535	≥90	15°	817.4lm
	3000K			30°	932.9lm
	4000K			50°	915.3lm

Size/CTN: 395×315×300 mm
G.W./CTN: 16.22 kgs
PCS/CTN: 30 pcs

Light distribution parameters


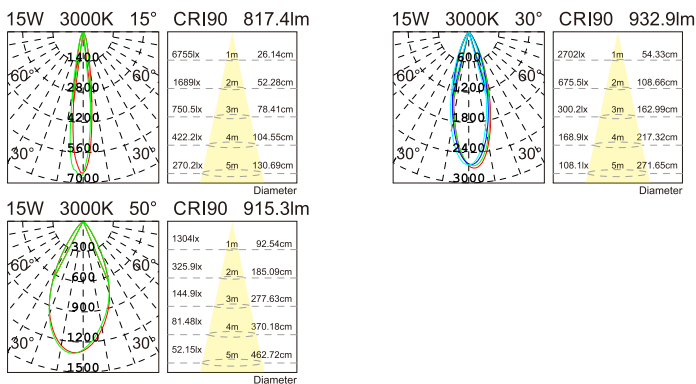


NC1038

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
10W	2700K	CREE COB	≥90	25°	743.9lm
	3000K			30°	748.4lm
	4000K			45°	746.6lm
	5000K				

Size/CTN: 425×395×275 mm
G.W./CTN: 11 kgs
PCS/CTN: 8 pcs

Light distribution parameters


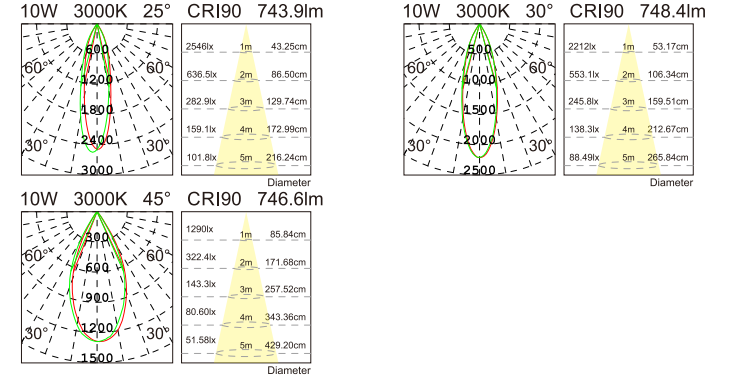


NC1083

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
10W	2700K	LEDTEEN	≥80	24°	1064.9lm
	3000K			30°	1110.2lm
	4000K			50°	1064.9lm
	5000K				

Size/CTN: 340×260×280 mm
G.W./CTN: 11.31 kgs
PCS/CTN: 36 pcs


Light distribution parameters

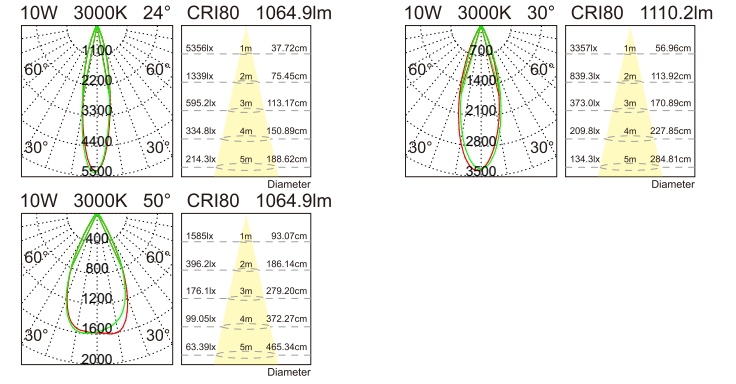




NC1079

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
15W	2700K	LEDTEEN	≥80	24°	1676.1lm
20W	3000K			36°	1657.3lm
	4000K			45°	1688.4lm
	5000K			30°	2090.1lm
				40°	2160.2lm
		50°	2038.8lm		



Size/CTN: 440×230×245 mm
G.W./CTN: 10.22 kgs
PCS/CTN: 16 pcs

Light distribution parameters


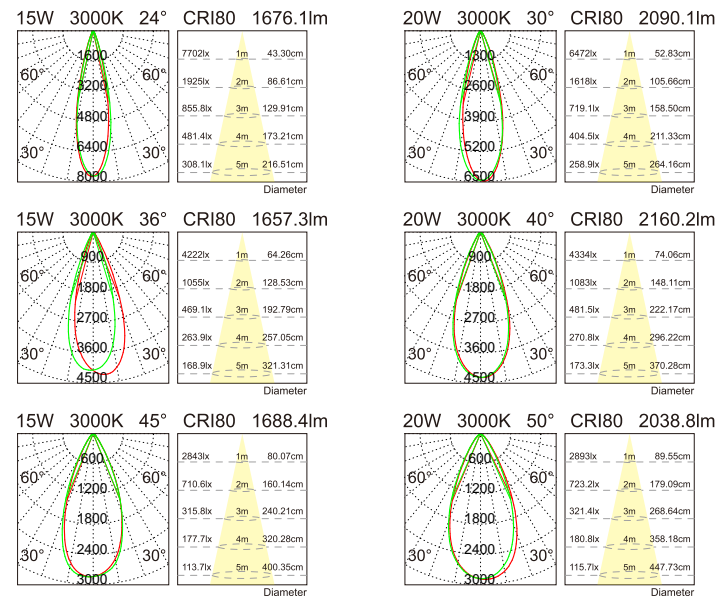


NC1080

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
30W	2700K	LEDTEEN	≥80	22°	3283.5lm
	3000K			27°	3430.6lm
	4000K			36°	3236.2lm
	5000K				

Size/CTN: 425×290×305 mm
G.W./CTN: 13.56 kgs
PCS/CTN: 12 pcs

Light distribution parameters


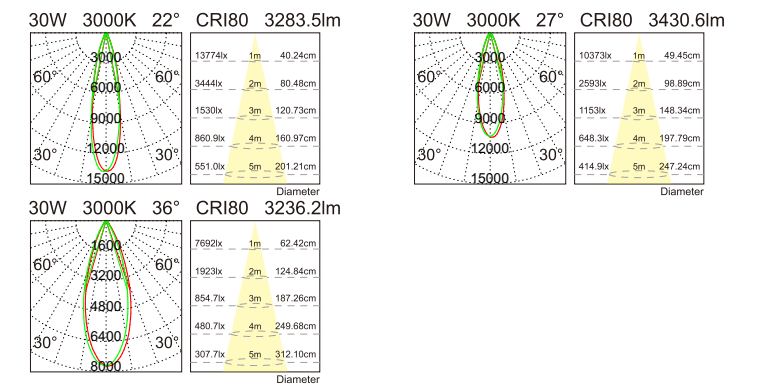


NC1084

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
40W	2700K	LEDTEEN	≥80	18°	4714.4lm
	3000K			24°	4785.5lm
	4000K			36°	5067.7lm
	5000K			50°	4714.9lm

Size/CTN: 545×370×205 mm
G.W./CTN: 12.85 kgs
PCS/CTN: 6 pcs

Light distribution parameters

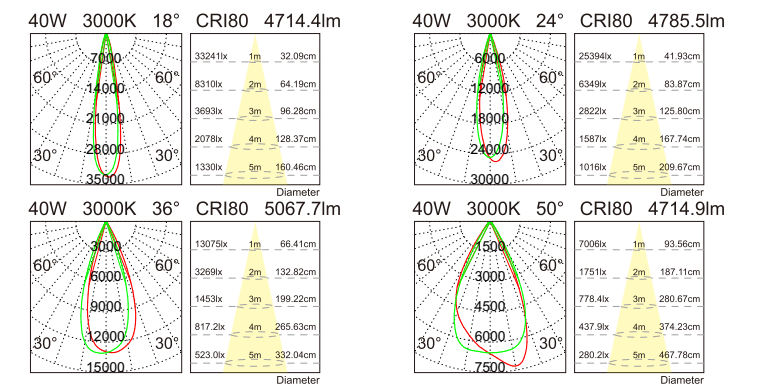

nelux
Producing your dreams



Nelux (HK) international,ltd,

18, harbour road, central plaza, 32/F, offic 3208, wanchai, hong kong, china

Tel: +852 28600042

Fax: +852 28600066

Business whatsapp: +852 5349 0724

wechat: neluxury

email:

sales@nelux.com.hk

salesnelux@gmail.com

neluxclients@gmail.com

website

www.nelux.com.hk